
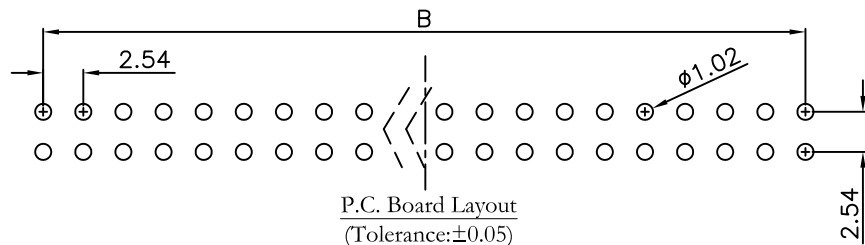

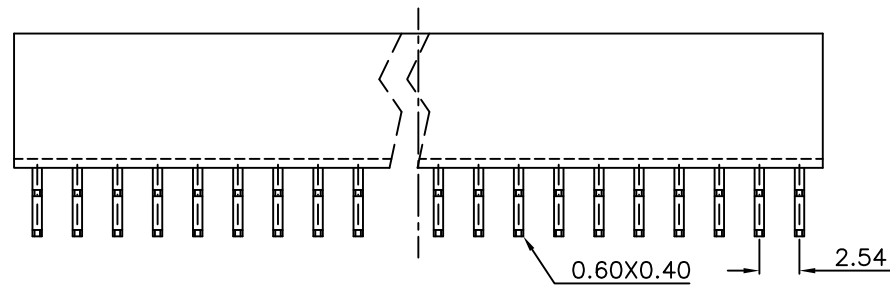
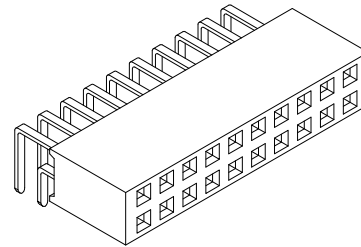


REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN160328	

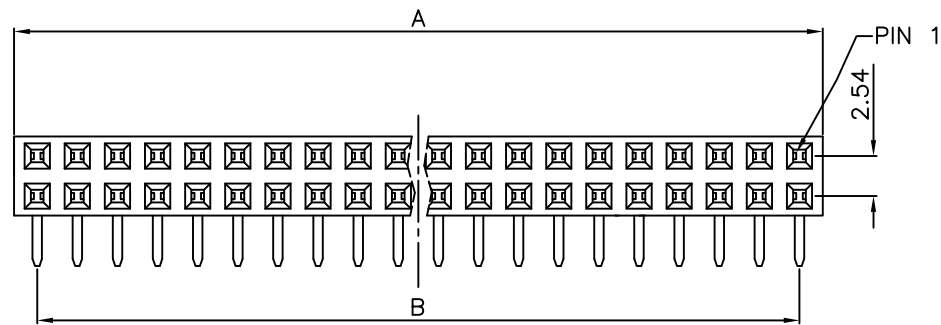

2044- 2 X xx G xx R A
 Series Double Row No. of Pin Per Row G: Gold Plated T: Tin Plated
 A: Tray Package B: Bulk Package R: Right Angle
 00: G/F 10: 10μ" 15: 15μ" 30: 30μ"

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V for 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

Insertion Depth: 2.55mm to 6.20mm.

Position Dimension	4 Thru 80
A	2.54 X No. of Position /2+0.4
B	2.54 X No. of Position /2-2.54

Tolerances	Dwg. No.	2044-D0000-006	Title:	
x = ±0.5	Projection		2044 Series	
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	ycj 03/15'16	P.C.B. Socket	
			2.54mmX2.54mm(0.100"X0.100")	

Title:
 2044 Series
 P.C.B. Socket
 2.54mmX2.54mm(0.100"X0.100")

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2044-2XxxGxxRA			
SHEET	1/1	Ver. No.	R5