
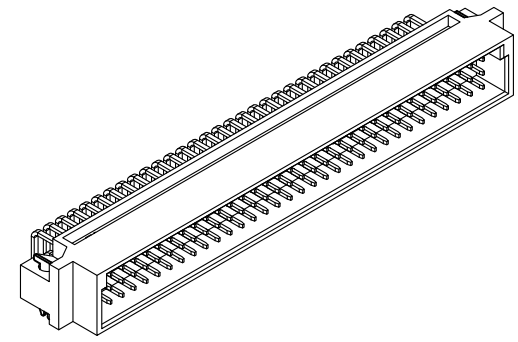


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN200517	

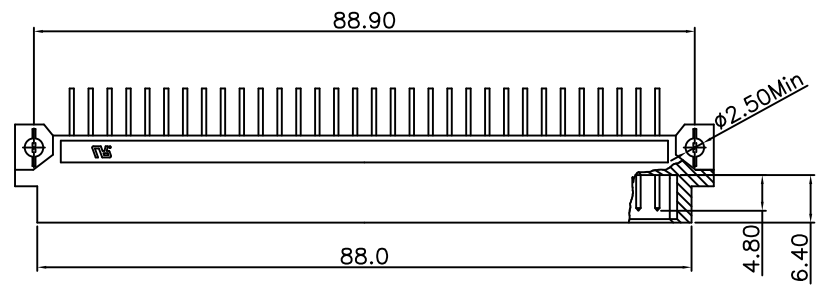

Material and Plating:

Housing: LCP, UL94V-0, Beige.
 Signal Contacts : Brass.
 Gold Plated on Contact Area and 80u" Min or Gold Flash Tin Plated on Solder Tail over Nickel 50u" Min .
 Lock: Phosphor Bronze.




Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

Note:

Housing: High Temperature Plastic

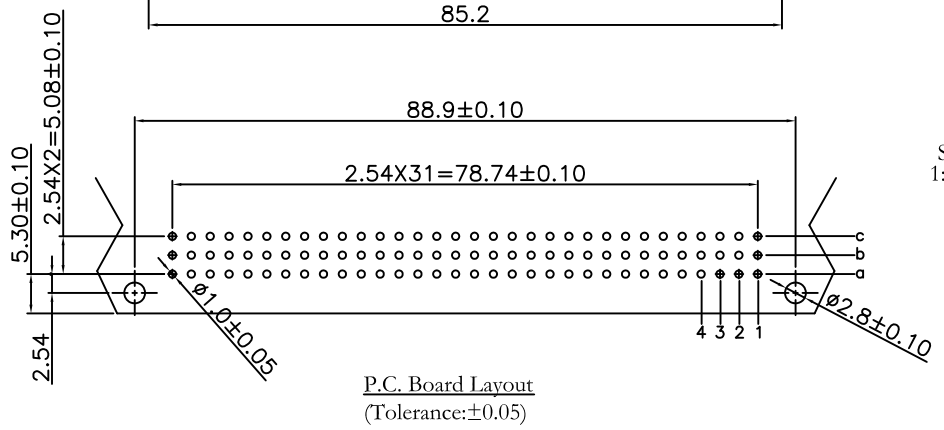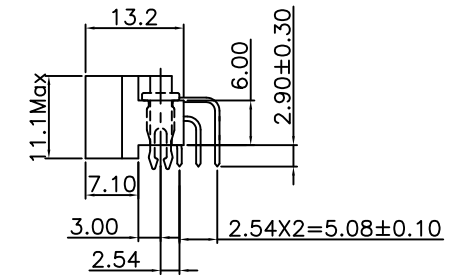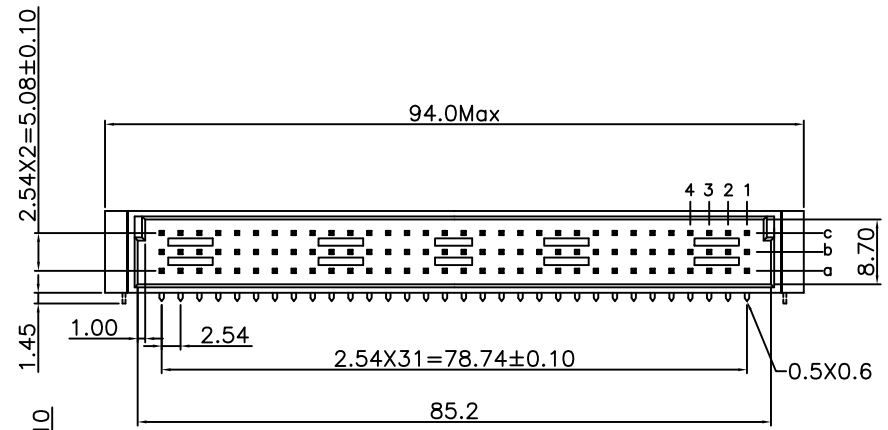

9001- 1 1 xx 1 C xx L1 A -HT
 Series
 1: 2.54mm
 1: Male
 Position
 1: Dip Length
 C: Dip Tin
 Contact Gold
 G: Gold Plated

Internal Code
 A: Tray Package
 Blank: W/O Lock
 L1: With Lock
 00: G/F
 10: 10u"
 15: 15u"
 30: 30u"

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	96	a b c		9001-11961C~
	64	a - c		9001-11641C~
	32	a - -		9001-11321C~

Tolerances	Dwg. No.	9001D11105	Title:		9001 Series DIN41612 C Type Male		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-11xx1CxxL1A-HT			
x = ±0.5	Projection		Scale		1:1					
.x = ±0.25	Unit	mm	Scale	1:1						
.xx = ±0.15	Drawn By	WQ	05/12'20							