
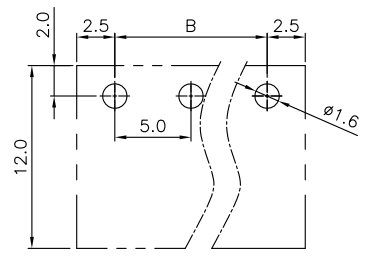







REV.	SPECIFICATION	ECN NO.	APPD.


8930-F085120GBBxxRB

8930-F085120GBAxxRB

Material:
Housing: Thermoplastic Polyester UL94V-0.
Contact Pin: Copper Alloy, Tin Plated.
Electrical Characteristics:
Voltage Rating: 300V.
Current Rating: 20A.
Withstanding Voltage: 1.6KV.
Operating Temperature: -40°C~+115°C.
***RoHS Compliant**



P.C.Board Layout

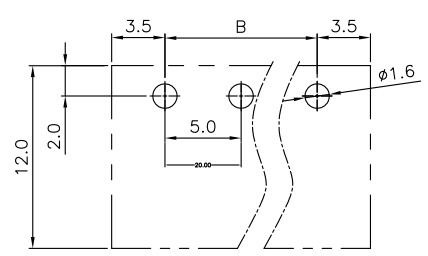

P.C.Board Layout

8930- Series
F Pitch 5.0mm
085120 Manufacturing Code
G Green
BA Close Type
xx No. of Positions
R Right Angle
B Bulk Package for 2~5Pos.
 Box Package for 6~24Pos.
B Bulk Package for 2~5Pos.
 Box Package for 6~24Pos.

Position	02 Thru 24
Dimension	
A	No. of Positions * 5.0+2.0
B	(No. of Positions -1) * 5.0
C	No. of Positions * 5.0

Tolerances	Dwg. No.	8930D01005
x = ±0.5	Projection	
.x = ±0.30	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	PEGGY12/09'15

Title:
 8930 Series
 5.0mm Terminal Block
 (8500-xxMTR1x-01)

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 8930-F085120GBAxxRB			
SHEET	1/1	Ver.No.	A5

780