


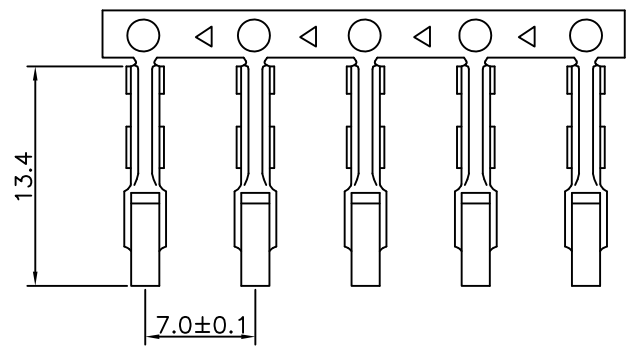
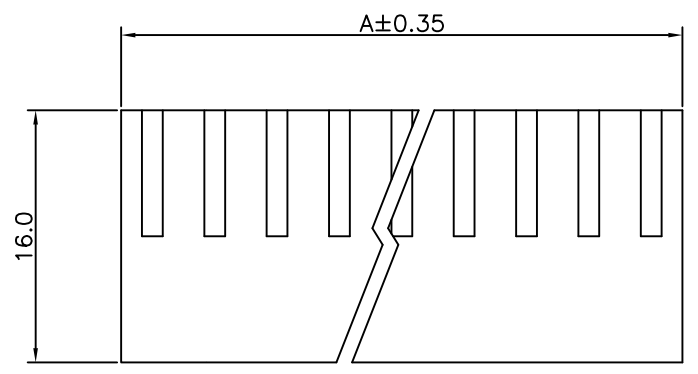


REV.	SPECIFICATION	ECN NO.	APPD.

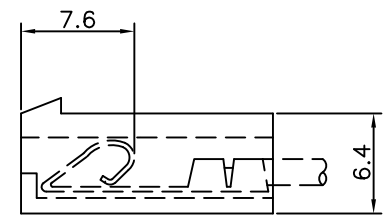

Material:
Housing: PA66, UL94V-2.
Contacts: Brass.
Terminal Plating: Tin plated.
Recommend wire: Copper Alloy.
Electrical Characteristics:
Voltage Rating: AC/DC 250V.
Current Rating: 7 AMP.
Dielectric Withstanding Voltage: AC 1500V for 1 minute.
Insulator Resistance: 1000MΩ min, at DC 500V.
Contact Resistance: 10mΩ max, at DC 100mA.
Operating Temperature: -25°C~+85°C.
***RoHS Compliant**

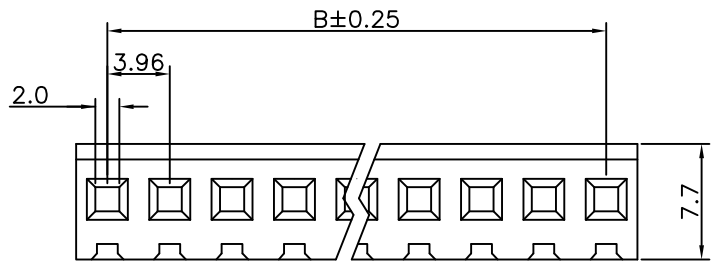

4771- xx H B
Series No. of Position H: Housing B: Bulk Package

4771- Pin-T-6K
Series T: Tin Plated 6K Pins Per Reel

Position	2 Thru 16
Dimension	
A	3.96 X No.of Positions+0.5
B	3.96 X No.of Positions-3.96

Tolerances	Dwg. No.	4771D02001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Vivian 06/27'17

Title:
4771 Series
Housing 3.96mm

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 4771-xxHB & 4771-PIN-T-6K

SHEET	1/1	Ver.No.	B3
-------	-----	---------	----

① 704