

REV.	SPECIFICATION	ECN NO.	APPD.

Material:





Housing: PA66, UL94V-2.

Electrical Characteristics:

Insulator Resistance: 1000MΩ min. at DC 500V.

Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

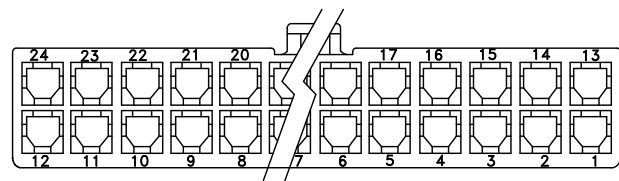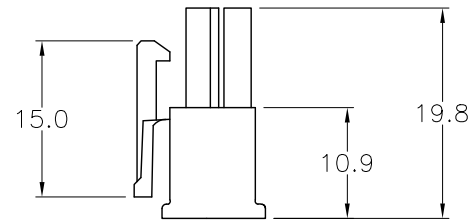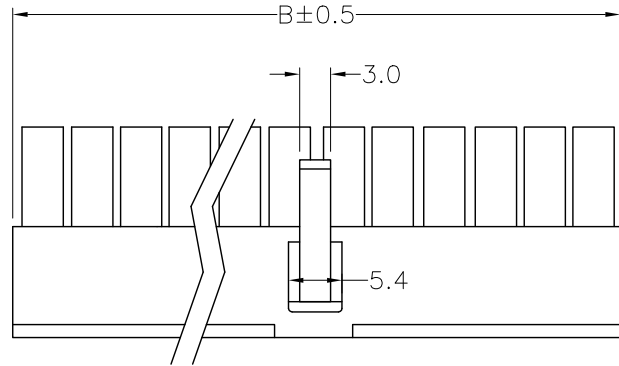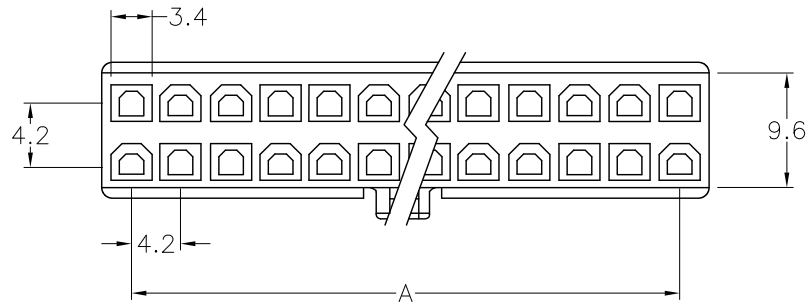

Series 4973- xx M H x B

No. of Position

M: Male

H: Housing

B: Bulk Package

Blank: Natural G: Green
 B: Black O: Orange
 W: White P: Pink
 R: Red U: Blue
 Y: Yellow C: Brown

Position	Dimension	
	A	B
2	4.2	5.6
4	8.4	9.8
6	12.6	14.0
8	16.8	18.2
10	21.0	22.4
12	25.2	26.6
14	29.4	30.8
16	33.6	35.0
18	37.8	39.2
20	42.0	43.4
22	46.2	47.6
24	50.4	51.8

Tolerances	Dwg. No.	4973H01001	
x = ±0.5	Projection	⊕ ↯	
.x = ±0.4	Unit	mm	Scale 1:1
.xx = ±0.25	Drawn By	jia-chi 04/30'18	

Title: 4973 Series
 4.2mm Connector
 Male Housing


①732/667

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4973-xxMHxB			
SHEET	1/2	Ver.No.	B5


1 2 3 4 5 6 7 8 9 10 11 12

REV.	SPECIFICATION	ECN NO.	APPD.


2P




4P




6P




8P




10P




12P

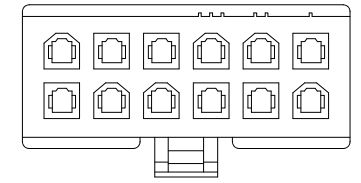


14P

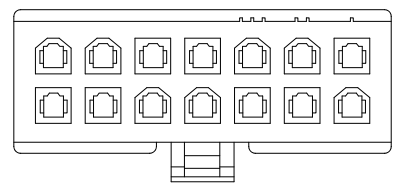


16P

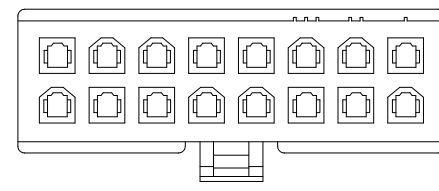


18P

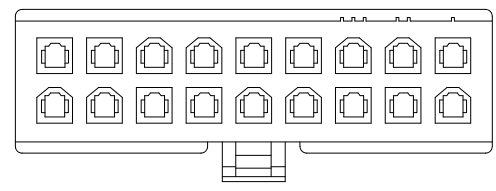


20P

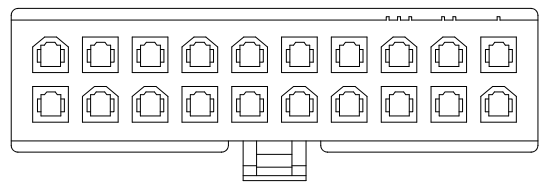

22P

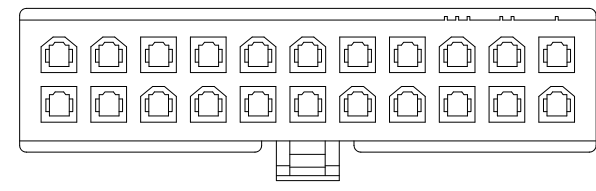

24P

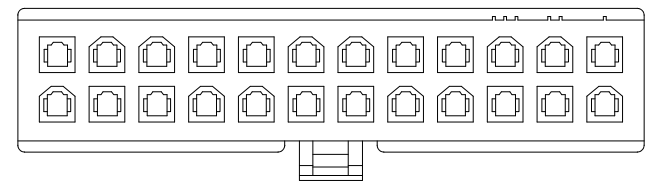

Tolerances	Dwg. No.	4973H01001	
x = ±0.5	Projection		
.x = ±0.4	Unit	mm	Scale 1:1
.xx = ±0.25	Drawn By	jia-chi 04/30'18	

Title: 4973 Series
4.2mm Connector
Male Housing

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4973-xxMHxB			
SHEET	2/2	Ver.No.	B5

1 2 3 4 5 6 7 8 9 10 11 12