
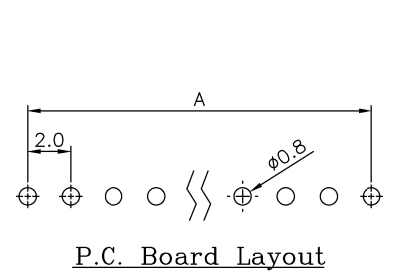
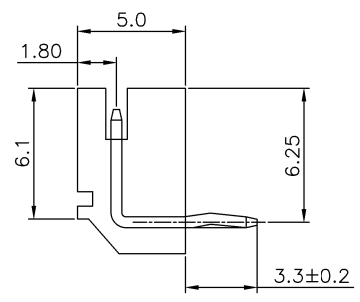
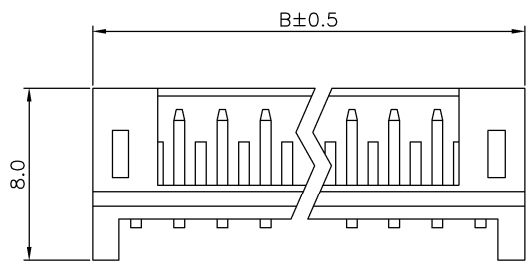

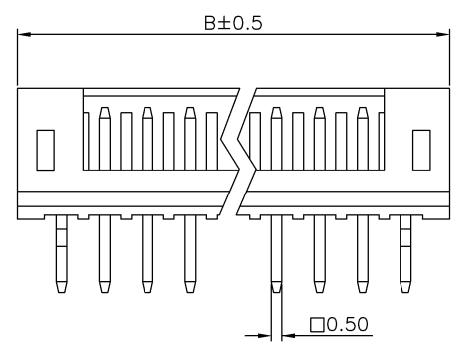
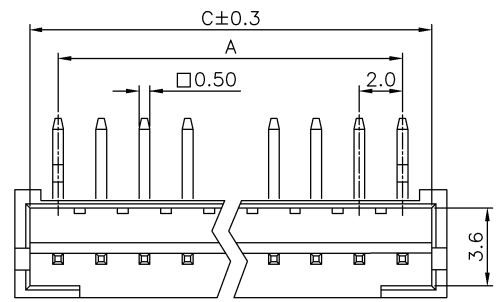


REV.	SPECIFICATION	ECN NO.	APPD.

**Material:**  
Housing: PA66, UL94V-0.  
Contacts: Brass, 80u" Tin Plated over Nickel 30u".

**Electrical Characteristics:**  
Voltage Rating: AC/DC 100V  
Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC 800V For 1 minute.  
Insulator Resistance: 1000MΩ min.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -25°C~+85°C.

**\*RoHS Compliant**

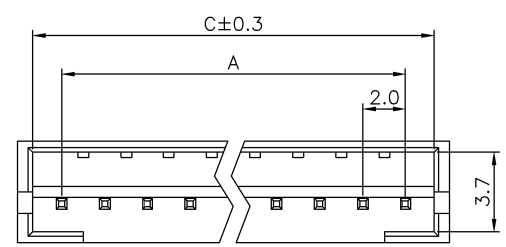

**4172-xxTxxB**

Series: 4172-  
No. of Position: xx  
T: Tin Plated  
x: Blank: White, B: Black, U: Blue  
S: Straight, R: Right Angle

B: Bulk Package

Dimension							
Positions	A	B	C	Positions	A	B	C
02	2.00	6.10	5.00	10	18.00	22.10	21.00
03	4.00	8.10	7.00	11	20.00	24.10	23.00
04	6.00	10.10	9.00	12	22.00	26.10	25.00
05	8.00	12.10	11.00	13	24.00	28.10	27.00
06	10.00	14.10	13.00	14	26.00	30.10	29.00
07	12.00	16.10	15.00	15	28.00	32.10	31.00
08	14.00	18.10	17.00	16	30.00	34.10	33.00
09	16.00	20.10	19.00				

Tolerances	Dwg. No.	4172D01001
x = ±0.5	Projection	
.x = ±0.35	Unit	mm
.xx = ±0.25	Scale	1:1
	Drawn By	Martin 09/21'22

Title: 4172 Series wafer 2.00mm

704

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4172-xxTxxB			
SHEET	1/1	Ver.No.	B7