

REV.	SPECIFICATION	ECN NO.	APPD.



Material:

Housing: LCP, UL94V-0, Black.
 Contact: Brass, 120~200u" Tin Plated or Gold Plated over Nickel 30u".

Electrical Characteristics:


Current Rating: 5.0 AMP
 Dielectric Withstanding Voltage: AC 1500V.
 Insulator Resistance: 1000MΩ min.
 Contact Resistance: 10mΩ max.
 Operating Temperature: -25°C ~+105°C.

***RoHS Compliant**

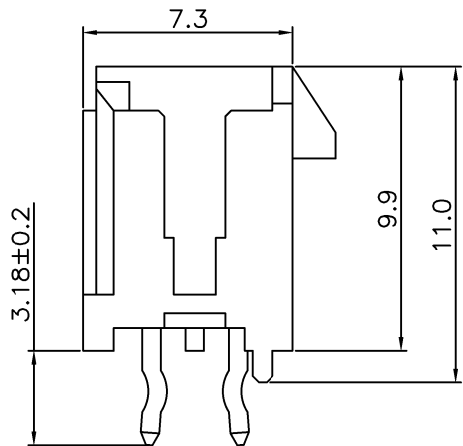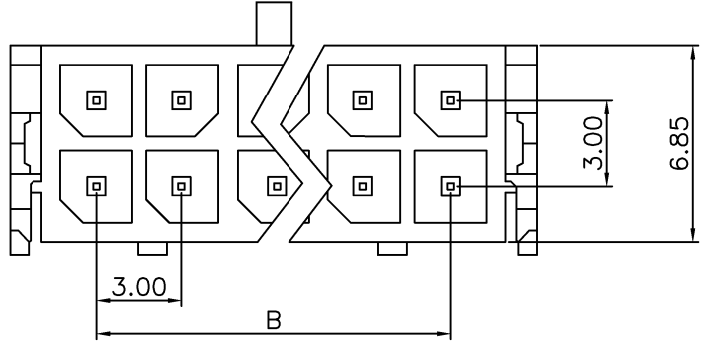

Dimension		
Positions	A	B
2X01	6.65	
2X02	9.65	3.00
2X03	12.65	6.00
2X04	15.65	9.00
2X05	18.65	12.00
2X06	21.65	15.00
2X07	24.65	18.00
2X08	27.65	21.00
2X09	30.65	24.00
2X10	33.65	27.00
2X11	36.65	30.00
2X12	39.65	33.00

Series 4976- 2 X xx T S B
 Double Row
 No. of Positions
 B: Bulk Package
 S: Straight
 T: Tin Plated
 G00: Gold Flash

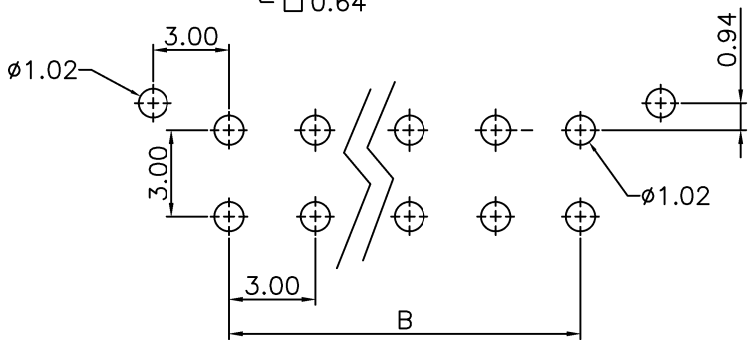

P.C. Board Layout


Tolerances	Dwg. No.	4976D01001	Title:	4976 Series
x = ±0.5	Projection		3.0mm wire to Board	
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	Martin 04/13'21	Strait Type	
			Ø667	

OUPIIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 4976-2XxxTSB


SHEET	1/2	Ver.No.	B8
-------	-----	---------	----

REV.	SPECIFICATION	ECN NO.	APPD.


2X01P




2X02P




2X03P




2X04P




2X05P




2X06P

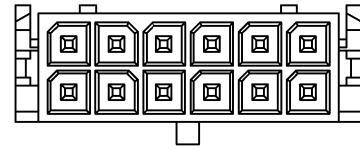


2X07P

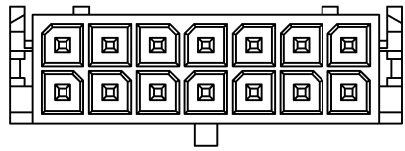


2X08P

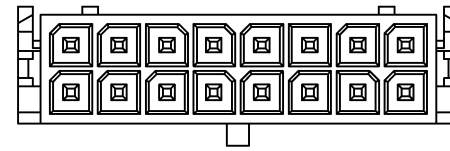


2X09P

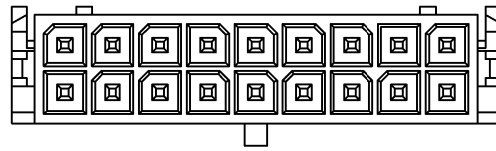


2X10P

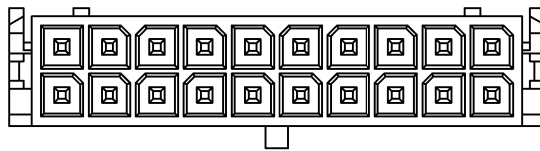

2X11P

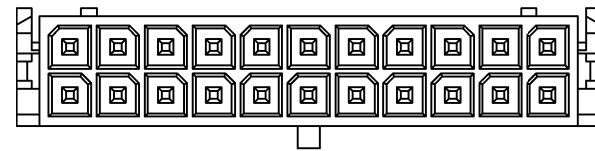

2X12P

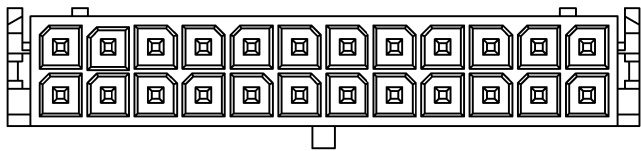

Tolerances	Dwg. No.	4976D01001	
x = ±0.5	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	Martin 04/13'21	

Title: 4976 Series
3.0mm wire to Board
Straight Type

OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4976-2XxxTSB			
SHEET	2/2	Ver.No.	B8