


REV.	SPECIFICATION	ECN NO.	APPD.

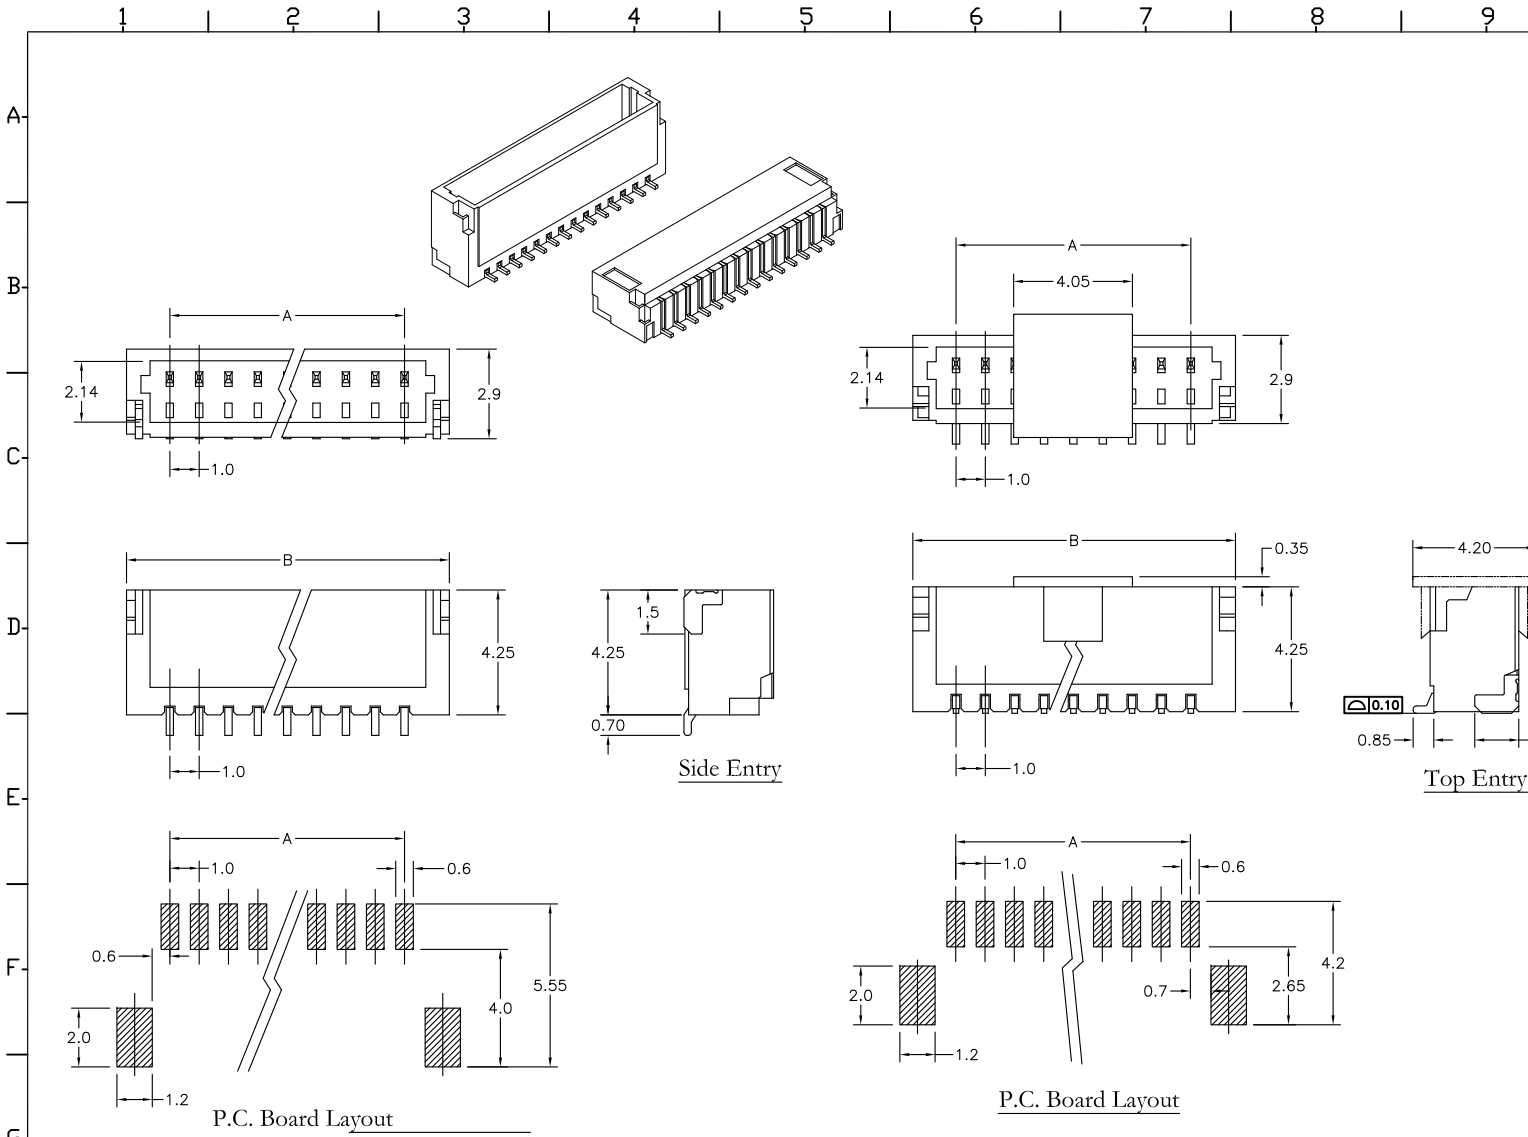

Material:
Housing: PA6T, UL94V-0.
Contacts: Phosphor Bronze,
100~120μ" Matte Tin Plated on Contact Area and
Solder Tail over Nickel 50μ".
Solder Pad: Phosphor Bronze, 100~120μ" Matte Tin Plated.
over Nickel 50μ".

Electrical Characteristics:
Current Rating: 1 AMP.
Voltage Rating: 50V AC/DC.
Dielectric Withstanding Voltage: AC 250V For 1 minute.
Insulator Resistance: 100MΩ min. at DC 50V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -25°C~+85°C.

***RoHS Compliant**

4472- 1 X xx MT Dx T - P
Series Single No. of MT: Matte D1: SMD Side Entry U: Tube Package Blank: Without Pad
Row Position Tin Plated D3: SMD Top Entry T: Tape & Reel Package P: Plastic Pad

Position	2 Thru 15		
Dimension	(1.0 X No. of Positions)-1.0		
A	(1.0 X No. of Positions)+2.0		
B	(1.0 X No. of Positions)+2.0		
OUPIIN			
OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4472-1XxxMTDxT-P			
SHEET	1/1	Ver.No.	B1

Tolerances	Dwg. No.	4472D01001	
x = ±0.5	Projection	⊕ ⊖	
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	Scott 03/24'16	

Title:
4472 Series
SMD R/A & Vertical Type
1.00mm(0.039")

① 704