
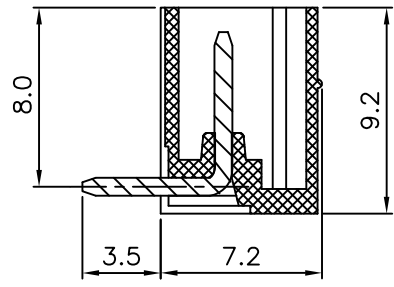
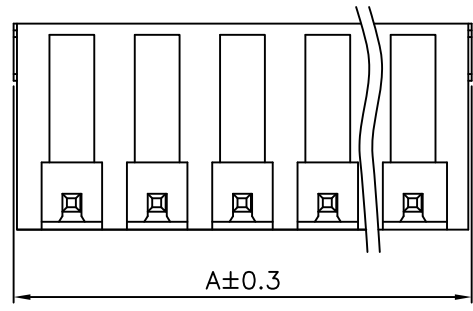



REV.	SPECIFICATION	ECN NO.	APPD.

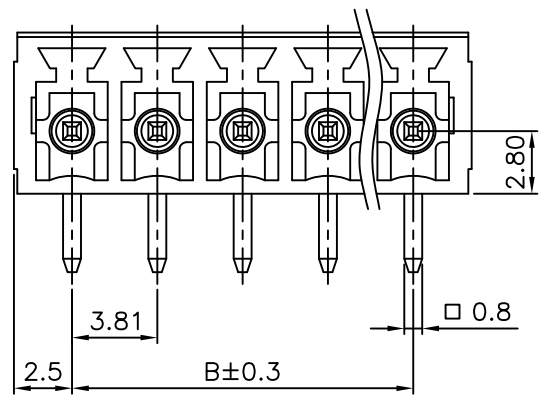

Material:
Housing: Thermoplastic Polyester UL94V-0.
Contact Pin: Copper Alloy, Tin Plated.

Electrical Characteristics:
Voltage Rating: 300V.
Current Rating: 10A.
Withstanding Voltage: 1.6KV.
Operating Temperature: -40°C~+115°C.

***RoHS Compliant**

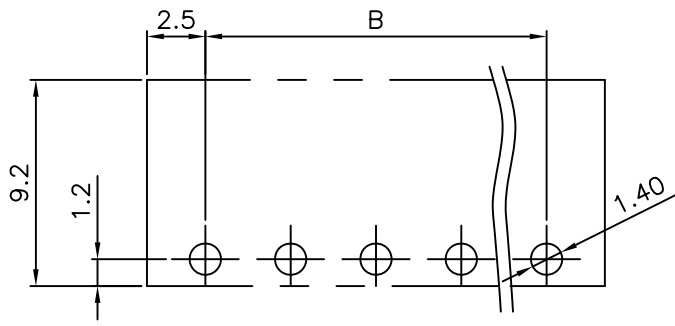

P.C.Board Layout

8930- Series **D** Pitch 3.81mm **072092** Manufacturing Code **G** G:Green B:Black Y:Grey U:Blue **BA** BA:Close Type **xx** No. of Positions **R** R:Right Angle **B** B:Bulk Package for 2~4Pos. Box Package for 5~24Pos.

Position	02 Thru 24
Dimension	
A	No. of Positions * 3.81 + 1.19
B	(No. of Positions - 1) * 3.81

Tolerances	Dwg. No.	8930D01011
x = ±0.5	Projection	
.x = ±0.30	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	FL10/05'12

Title:
8930 Series
3.81mm Terminal Block
(8100-xxMTR11-02)

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 8930-D072092GBAxxRB

SHEET	1/1	Ver.No.	A3
-------	-----	---------	----

①780