


|      |               |         |       |
|------|---------------|---------|-------|
| REV. | SPECIFICATION | ECN NO. | APPD. |
|      |               |         |       |

**Material:**

Contact: Copper Alloy with Gold Plated.

Lock Link: Copper Alloy with Nickel Plated.

**\*RoHS Compliant**

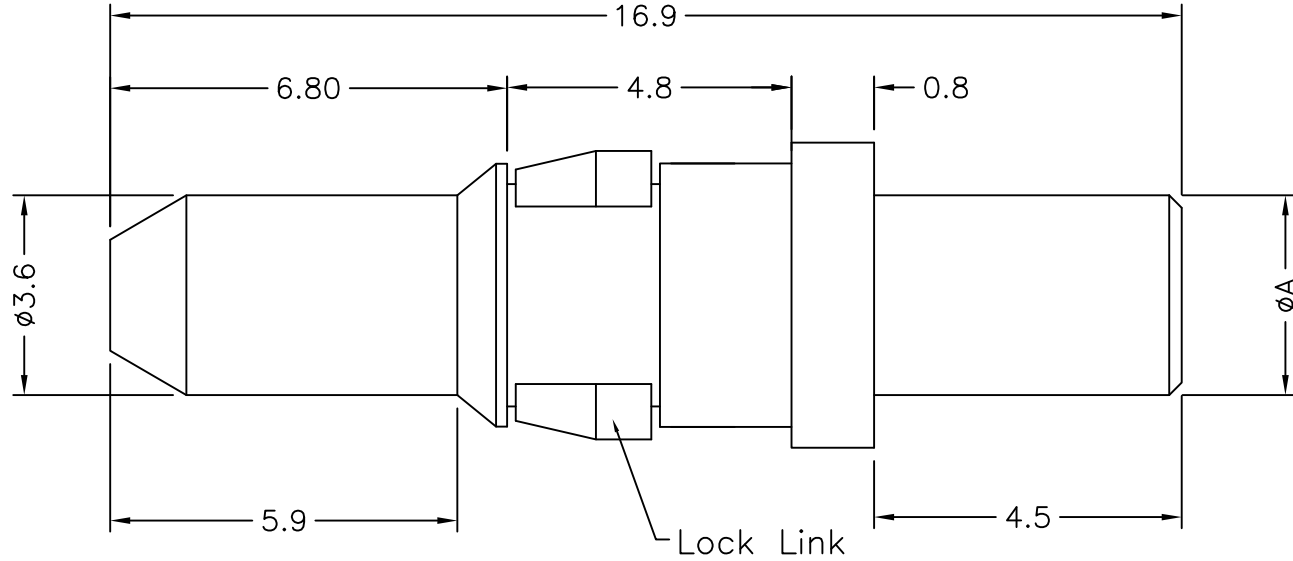

LB- M S xx 01 G xx B  
 Power Pin M: Male S: Straight Type 40: 40A 30: 30A 20: 20A 10: 10A Pin Type G: Gold Plated 00: G/F 10: 10 μ" 15: 15 μ" 20: 20 μ" 30: 30 μ" B: Bulk Package

| Current Rating (Amps) | Dimension |
|-----------------------|-----------|
|                       | øA        |
| 40                    | 3.75      |
| 30                    | 3.17      |
| 20                    | 2.85      |
| 10                    | 1.70      |

|             |            |                 |       |                                              |     |
|-------------|------------|-----------------|-------|----------------------------------------------|-----|
| Tolerances  | Dwg. No.   | LB00D01004      |       | Title:                                       |     |
| x = ±0.50   | Projection | ⊕ ⊖             |       | LB Series<br>Power Pin Male<br>Straight Type |     |
| .x = ±0.25  | Unit       | mm              | Scale |                                              | 1:1 |
| .xx = ±0.15 | Drawn By   | Vic Lyu12/01'15 |       |                                              |     |

|       |
|-------|
| ① 597 |
|-------|

|                                     |     |         |    |
|-------------------------------------|-----|---------|----|
| <b>OUPIN</b>                        |     |         |    |
| OUPIN ELECTRONIC(KUNSHAN) CO., LTD. |     |         |    |
| P/N: LB-MSxx01GxxB                  |     |         |    |
| SHEET                               | 1/1 | Ver.No. | A3 |