

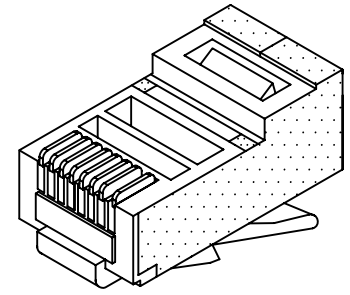
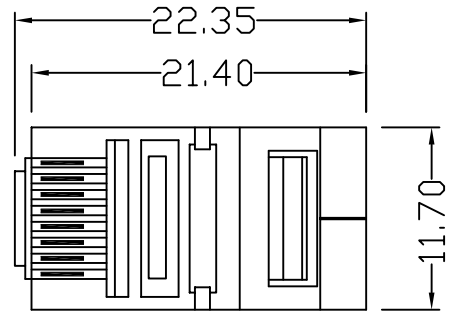
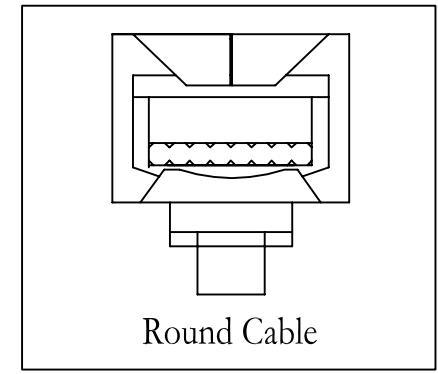



REV.	SPECIFICATION	ECN NO.	APPD.

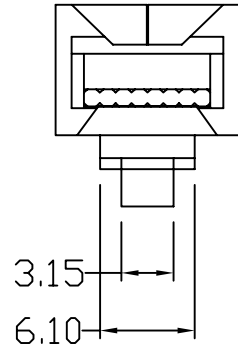

**Material:**  
**Housing:** Thermoplastic Polyester UL94V-2.  
**Contacts:** Copper Alloy.  
**Shield:** Copper Alloy, Nickel Plated.  
**Electrical Characteristics:**  
**Current Rating:** 1.5 AMP.  
**Insulator Resistance:** 1000M Ω min. at DC 500V.  
**Contact Resistance:** 30m Ω max. at DC 100mA.  
**Operating Temperature:** -40°C~+85°C.  
**\*RoHS Compliant**

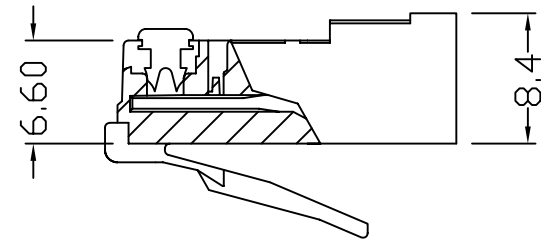

8949-A   8   8   -06   S   R   B  
Series   8: 8 Position   8: 8 Contacts   06: 6 μ" Gold Plated   S:Shield   R: Round Cable   B: Bulk Package  
15: 15 μ" Gold Plated   Blank: Flat Oval Cable  
30: 30 μ" Gold Plated  
50: 50 μ" Gold Plated

<b>Tolerances</b>	<b>Dwg. No.</b>	8949D01006		<b>Title:</b>				
x = ±0.5	<b>Projection</b>	⊕ ⊖		8949-A Series Modular Plug				
.x = ±0.25	<b>Unit</b> mm	<b>Scale</b>	1:1					
.xx = ±0.15	<b>Drawn By</b>	Peggy11/11'13						
				⊙773	 <b>OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.</b> <b>P/N:</b> 8949-A88-06SRB			
							<b>SHEET</b>	1/1