
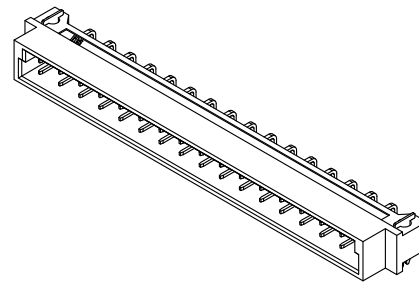


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN200305	

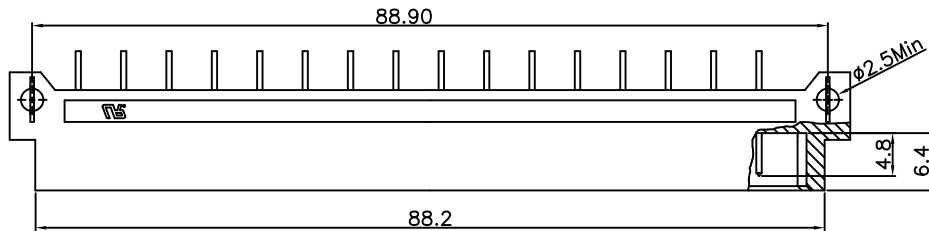

Material:

Housing: PBT,UL94V-0,Beige.

Contacts: Brass

Lock: Phosphor Bronze

Gold Plated on Contact Area and 80u" Min Tin or Gold Flash Plated on Solder tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.




Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 10⁶MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

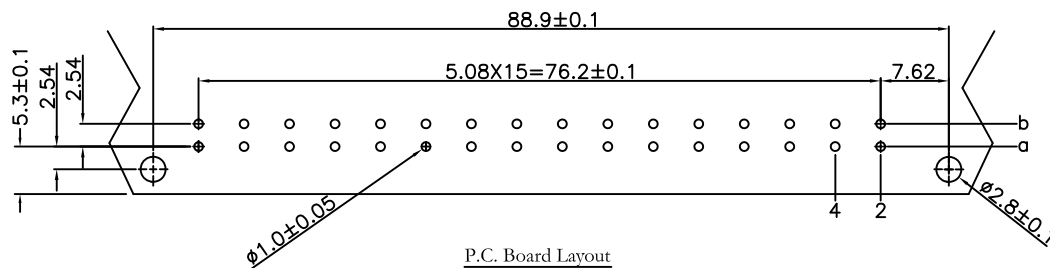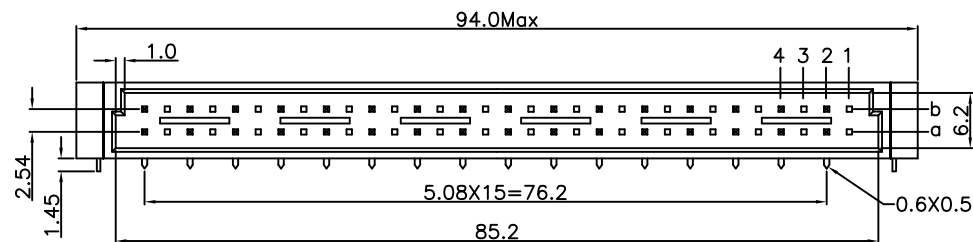

P.C. Board Layout
Tolerance:(± 0.05)

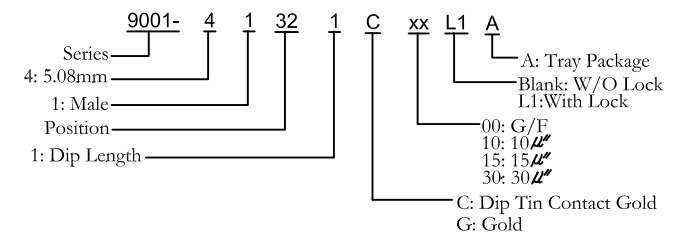

Tolerances	Dwg. No.	9001D41002	Title:
x = ±0.5	Projection		9001 Series
.x = ±0.25	Unit	mm	DIN41612
.xx = ±0.15	Drawn By	Ping 02/13'20	B Type Male

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-41321CxxL1A			
SHEET	1/1	Ver.No.	R4