

REV.	SPECIFICATION	ECN NO.	APPD.
R7		ECN130737	

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.







Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

Insertion Depth: 2.55mm to 6.40mm.

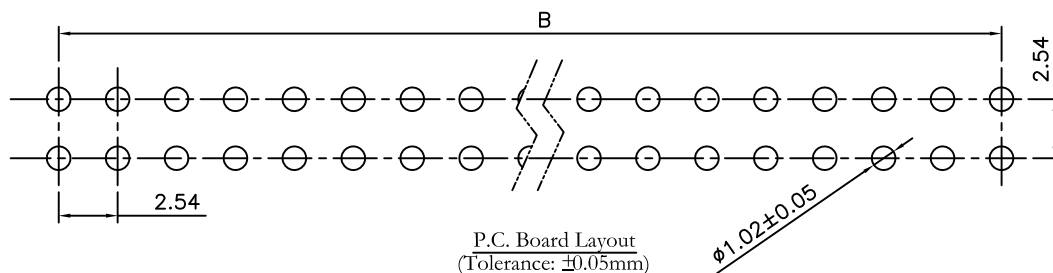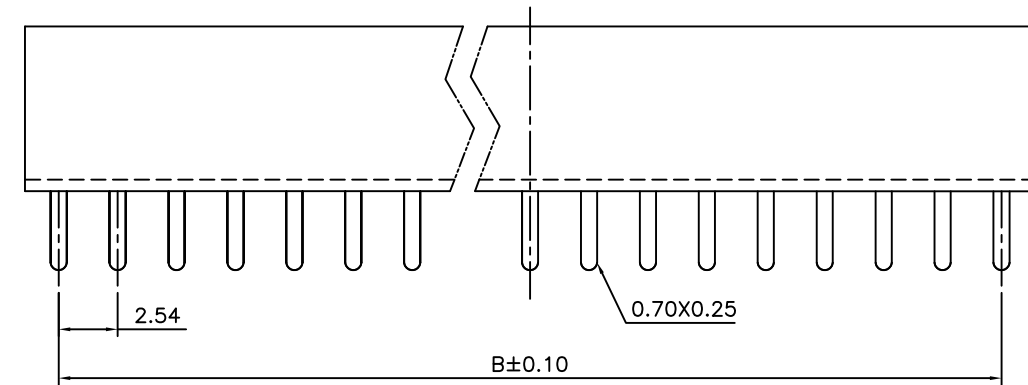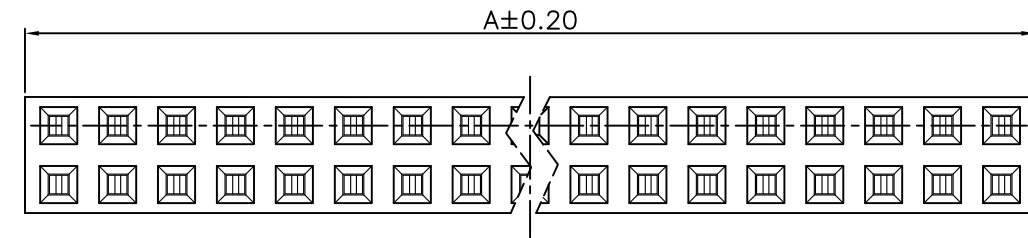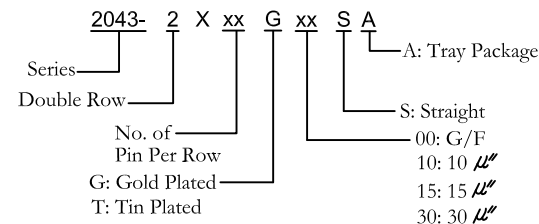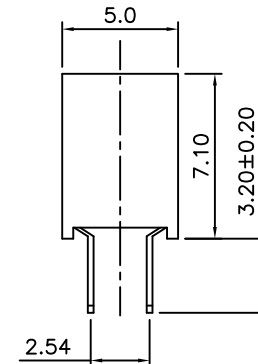

Tolerances	Dwg. No.	2043-D0000-002		Title:	
x = ±0.5	Projection			2043 Series P.C.B. Socket 2.54mmX2.54mm (0.100"X0.100")	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	YTY07/31'13			

Position Dimension	4 Thru 80
A	2.54 x No.of Position/2
B	2.54 x No of Position/2 -2.54

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2043-2XxxGxxSA			
SHEET	1/1	Ver.No.	R7