
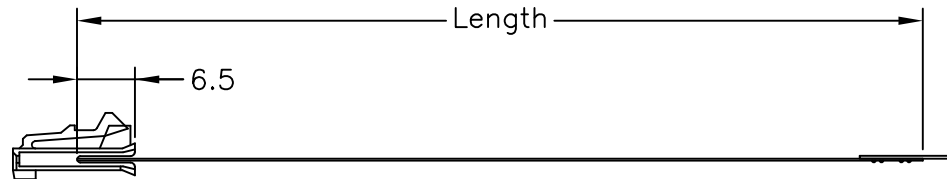


Note:

UL Style:AWM 20706 60V -30°C ~+105°C.

UL Style:AWM 20624 60V -30°C ~+80°C.

**\*RoHS Compliant**

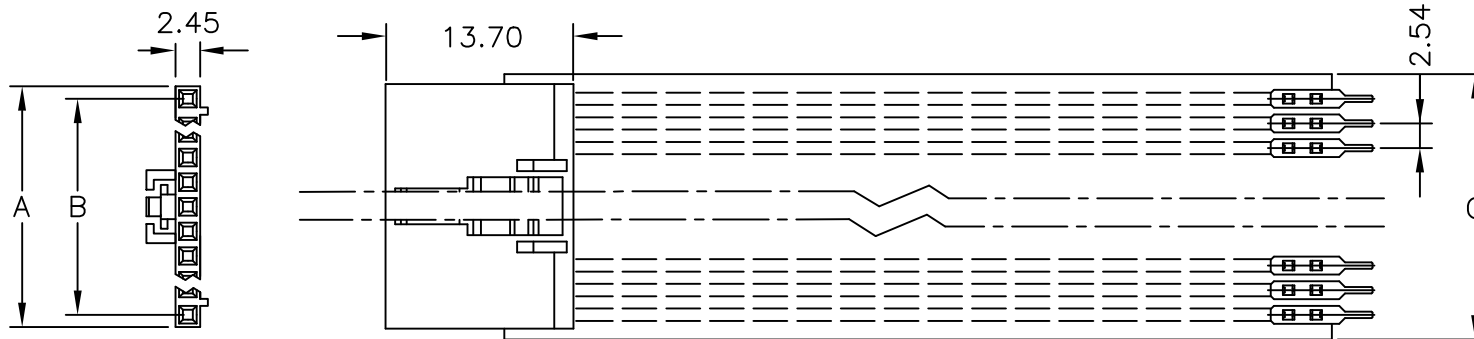

Positions	A	B	C	Positions	A	B	C
02	5.08	2.54	7.62	15	38.10	35.54	40.64
03	7.62	5.08	10.16	16	40.64	38.10	43.18
04	10.16	7.62	12.70	17	43.18	40.64	45.72
05	12.70	10.16	15.24	18	45.72	43.18	48.26
06	15.24	12.70	17.78	19	48.26	45.72	50.80
07	17.78	15.24	20.32	20	50.80	48.26	53.34
08	20.32	17.78	22.86	21	53.34	50.80	55.88
09	22.86	20.32	25.40	22	55.88	53.34	58.42
10	25.40	22.86	27.94	23	58.42	55.88	60.96
11	27.94	25.40	30.48	24	60.96	58.42	63.50
12	30.48	27.94	33.02	25	63.50	60.96	66.04
13	33.02	30.48	35.54	26	66.04	63.50	68.58
14	35.54	33.02	38.10				

FC5    4    A    -x    xx    FH    +xx    M    X    xxMM  
 Series    4: Pitch    A: UL20706    NO. of    FH:Female    NO. of    M:Male    X    Length  
                     2.54    B: UL20624    Pin Count    Housing    Pin Count    Terminal

Tolerances(Cable Total Length) ± 1 (30~100mm) ± 3 (101~300mm) ± 5 (301~600mm) ± 8 (601mm~900mm)	Dwg. No.	FC54F00005	Part No.		 <b>OUPIIN ENTERPRISE CO., LTD.</b> SHEET    1/1    Ver. No.    A1
	Projection		FC54A-xxxFH+xxMXxxMM		
	Unit mm	Scale	1:1		
	Drawn By	Jerry 07/13'20	Title: Flexible Flat Cable		