

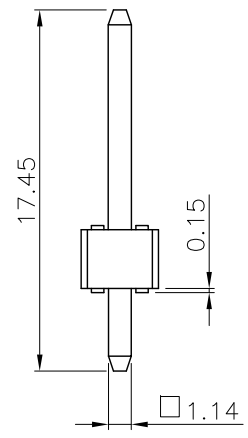
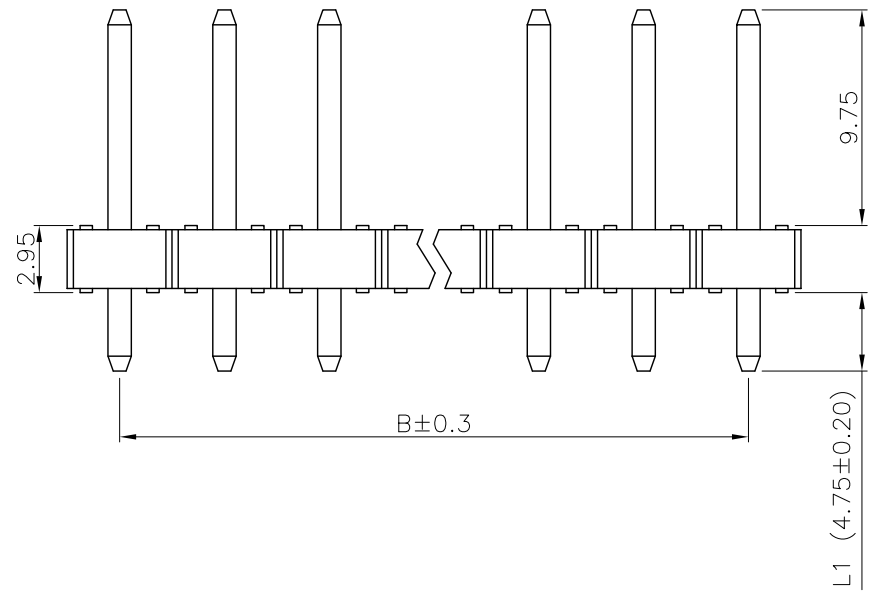


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, 100u" Tin Plated over Copper.
Electrical Characteristics:
Voltage Rating: AC/DC 250V.
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 500V.
Insulation Resistance: 5000MΩ min.
Contact Resistance: 10mΩ max.
Operating Temperature: -40°C~+105°C.
***RoHS Compliant**

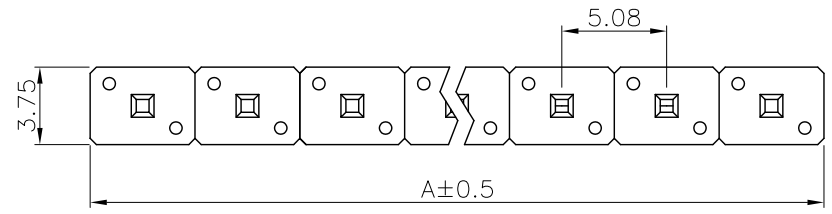

DLC- Series xx No. of Pin Per Pow P Bulk Package B L1: Dip Length

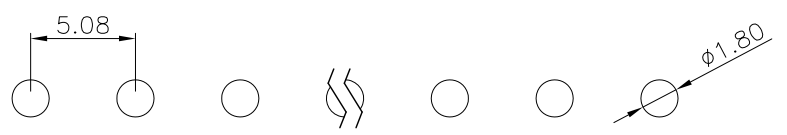

P.C.Board Layout

Position	01 Thru 16
Dimension	
A	5.08 X No.of Positions
B	5.08*(No.of Positions-1)

Tolerances	Dwg No.	DLC0D01002
.x = ±0.50	Projection	⊕ ↖
.xx = ±0.25	Unit	mm
.xxx = ±0.15	Scale	1:1
	Drawn By	Lan 02/22'17

Title: DLC Series
Pin Header 5.08mm

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: DLC-xxPB-L1			
SHEET	1/1	Ver.No.	A6

⌀100