

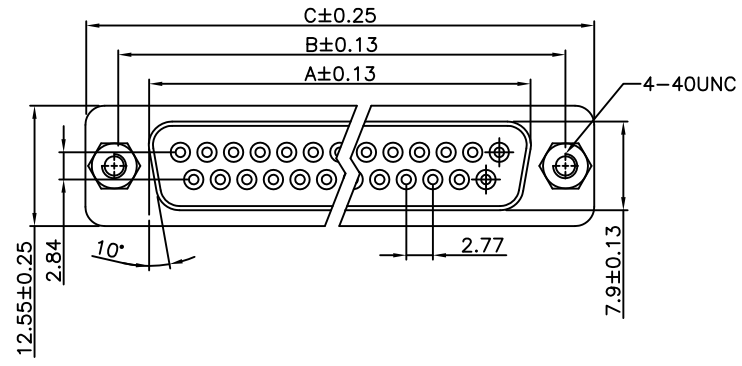
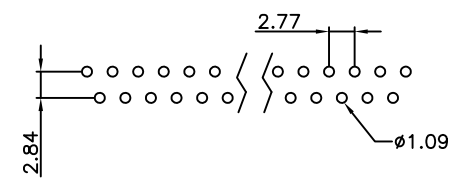


REV.	SPECIFICATION	ECN NO.	APPD.
A5			



Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated over Nickel 30u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulation Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

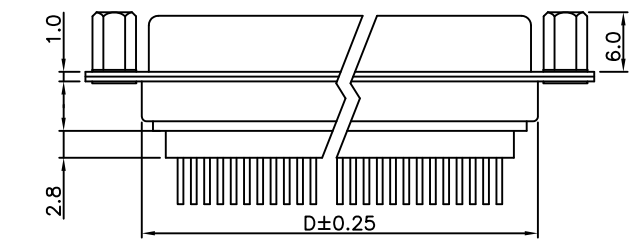

P.C. Board Layout

7925- xx F T B G 00 N1 A

Series ———
Position ———
F: Female
B: Black
U: Blue
W: White
G: Gold Plated

A: Tray Package
N1: With NUTS 4-40UNC Threaded Riveted On Face Side
00: G/F
10: 10u"
15: 15u"
30: 30u"

Position	Dimension			
	A	B	C	D
9	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.51
25	38.38	47.04	53.04	41.30
37	54.84	63.50	69.32	57.71

Tolerances	Dwg. No.	7925D02001	Title:	7925 Series D-SUB Straighe With Filter Type		
x = ±0.50	Projection		0767			
.x = ±0.25	Unit	mm			Scale	1:1
.xx = ±0.15	Drawn By	jia-chi 12/25'17				

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 7925-xxFTBG00N1A

SHEET	1/1	Ver.No.	A7
--------------	-----	----------------	----