



# PRODUCT SPECIFICATION

## 產品規格書

產品名稱 Description	產品料號 Part No.	圖號 Drawing No.
High Power And Signal Edge Card Connector	9307-2P14S08C7KAA01	9309-DP6S8P8-001

PRODUCT NAME 產品名稱	DOCUMENT No.: 文件編號	Rev. 版本	OUPIIN
High Power And Signal Edge Card Connector	Q9307-PSS-001	A	歐品電子
	<b>Approved</b> 核准	<b>Checked</b> 審核	<b>Prepared</b> 制作
			GYJ 12/17'22



# PRODUCT SPECIFICATION OF Oupiin

## 1. SCOPE 適用範圍

This product specification defines the product performance and the test methods to ascertain the performance of the High Power Card Edge connector, which is designed and manufactured by Oupiin Electronic Co., Ltd. This product specification is applicable but not only for those part numbers which be shown in the cover page.

本產品規格書規定了由歐品電子有限公司設計生產的 High Power Card Edge connector 型連接器產品的特性及測試方法。本產品規格書適用於但不局限於封面所顯示的產品料號。

## 2. REFERENCE DOCUMENTS 參考文件

MIL-STD-1344	Test method for electrical connector	電子連接器測試方法
MIL-STD-202	Test method for electrical components	電子零件測試方法
EIA364	Test method for electrical components	電子零件測試方法
JIS C 0051	Test method for electrical components	電子零件測試方法
MIL-G-45204C	Specification for gold plating	鍍金規格
IEC-512-3	IEC standard for current carrying capacity tests	IEC電流測試標準
QQ-N-290A	Specification for nickel plating	鍍鎳規格
MIL-P-81728A	Specification for tin/lead plating	鍍錫鉛規格
MIL-T-10727B	Specification for tin plating	鍍錫規格
UL1977	UL standard for safety of attachment plug and receptacle	UL安規要求標準

## 3. FEATURE & DIMENSIONS 特征及尺寸

### 3.1. PRODUCT DIMENSION 產品尺寸

These connectors shall have the dimensions as shown in drawing.


本產品的相關尺寸參見圖面。

### 3.2. MALE AND FEMALE PRODUCT 公母產品裝配

#### 3.2.1. Perpendicular to engaging direction 垂直插入方向


the design of the centering and guiding in the mpc of the free and fixed board connector modules shall accept a misalignment of 2.50MM in transverse and 1.427MM in longitudinal axes of the connector

固定板連接器模件的 Mpc 裡，連接器設計中心線橫向可接受 2.50mm 和縱向可接受 1.427mm 的偏差。

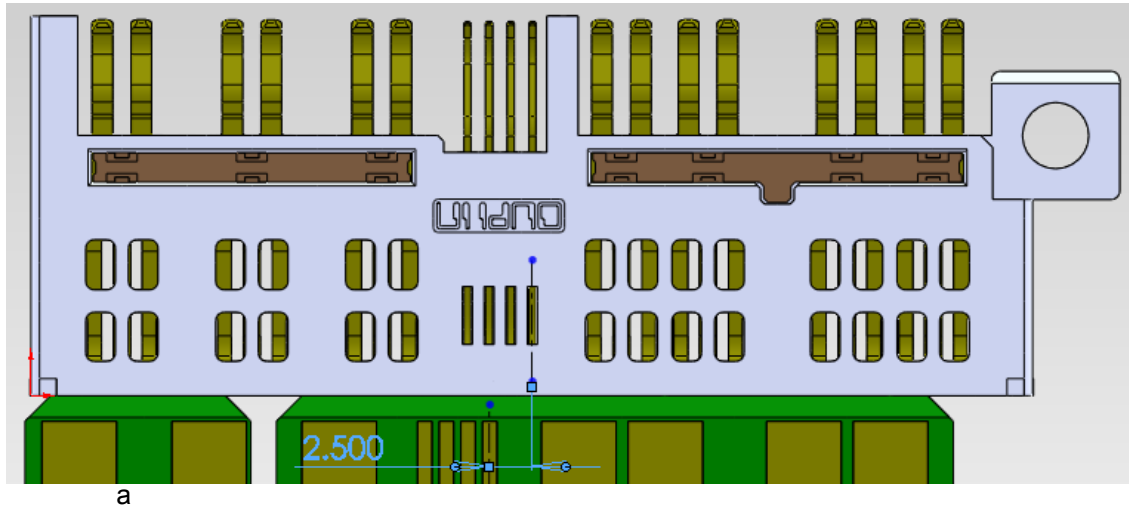

a

Allowed misalignment in transverse axes 在橫向方向允許對插偏差量


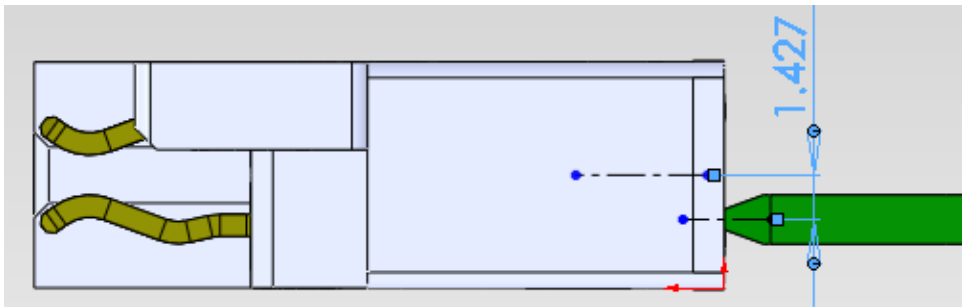


allowed misalignment in longitudinal axes 在縱向方向允許對插偏差量

### 3.2.2 Inclination 傾向

The center and guiding in the Mpc OF the free and the fixed board connector modules shall allow an initial angular misalignment of 2° Max in the transverse and longitudinal axes

固定板連接器模件的在 Mpc 裡, 連接器可接受橫向和縱向 2° 的最大傾斜對插角度。

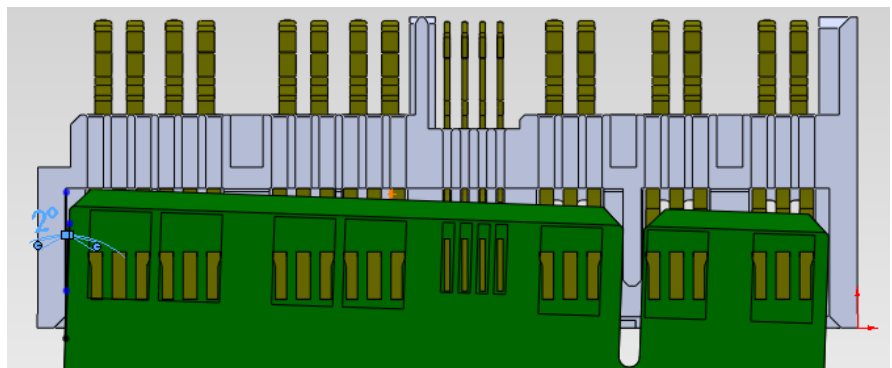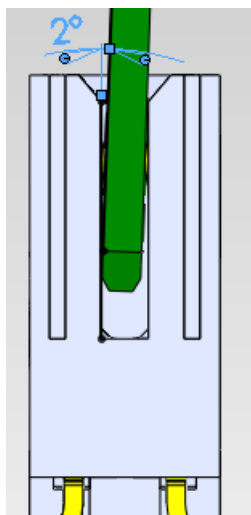




# PRODUCT SPECIFICATION OF Dupin

## 3.2.3 Capability for products wipe length

產品接觸長度等級

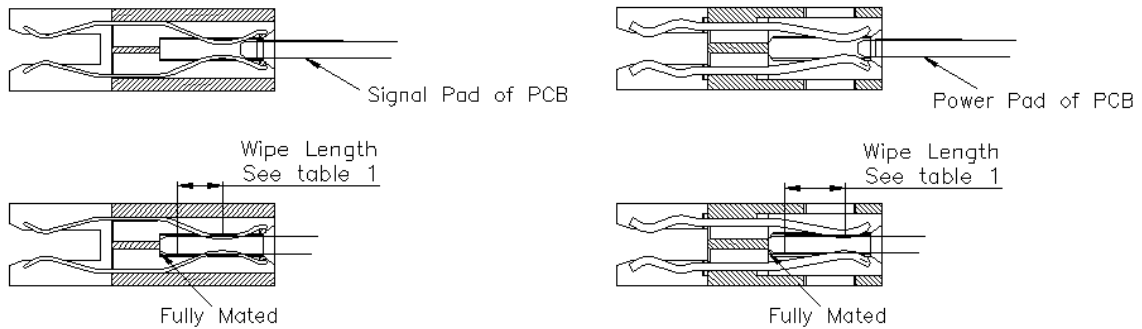

CONTACT	MATING LEVEL	WIPE LENGTH(MIN)
Power Pin	1	5.27mm
Signal Pin	1	4.00mm

Table 1

## 3.3. PCB/PANEL LAYOUT 印刷電路板佈局

The recommended PCB layout is shown in drawing.

本產品適用的 PCB layout 參見圖面。

## 3.4. BILL OF MATERIAL 材料清單

Harmful material controlling follows the requirements of RoHS. The bill of material is described in drawing.

有害物質控制符合RoHS指令要求。本產品使用的材料參見圖面。

## 3.5. MECHANICAL & ELECTRICAL CHARACTERISTIC 機械及電氣特性

The connector shall have the mechanical and electrical performance as described in drawing.

本產品的機械及電氣特性參見圖面。

## 3.6. PACKAGING 包裝

Products shall be packaged according to requirements specified in purchase order for safe delivery, connector container and the packaging method are shown in package specification.

產品可依客戶指定要求包裝，包裝材料與包裝方式參見產品包裝規範。



## PRODUCT SPECIFICATION OF Oupin

### 3.7 RATING CURRENT AND RATING VOLTAGE 額定電流與額定電壓

Rating current: Signal pin 1.0A High Power Pin 48A Low Power Pin 24A.

額定電流: Signal pin 1.0A High Power Pin 48A Low Power Pin 24A.

Rating voltage : Power pin 250V Signal pin 12V

額定電壓 Power pin 250V Signal pin 12V

### 3.8 TEMPERATURE RISE 溫升

1. Chart of Temperature rise vs current( series connection with all contact of SPEC)

加載電流對應溫升曲線圖(相同規格的所有 PIN 串聯起來)

### 3.9 STORAGE AND OPERATING TEMPERATURE 存貯與使用溫度

Temperature range: -55°C ~+125°C., including terminal temperature rise for rating current.

Storage Temperature :0°C~+40°C, Humidity: 80%RH under , Time limit is 18 months the products are stored .

溫度範圍：-55°C~+125°C,包含接觸端子的額定電流溫升.

儲存溫度：0°C~+40°C，濕度：80%RH以下,產品限存時間為18個月.

## 4.Environmental 環境要求

### 4.1. SOLDERABILITY 可焊性

Connectors meet solder-ability to EIA-364-52, and shall be free of contaminants.

產品可焊性符合EIA-364-52標準規定的相關要求，表面不得有污染物。

### 4.2. RESISTANCE TO SOLDER HEAT 耐焊接熱

#### 4.2.1. INFRARED REFLOW 紅外線回流焊接

Each cycle consists of three consecutive phases, as shown in **Table III**.

每個焊接週期包括三個連續的階段，見附表三。

**Note:** 說明

Device temperature measurements are referenced from the top-center of the package outer surface.

設備溫度量測時以從頂部中間位置測量為準。

## 5. PERFORMANCE AND TEST DESCRIPTION 性能及測試

### 5.1. REQUIREMENT 要求



## PRODUCT SPECIFICATION OF Oupin

Product is designed to meet electrical, mechanical, and environmental performance requirements specified in **Table I**.

本產品設計符合附表一所述的機械，電氣及環境要求。

### 5.2. TEST CONDITION 測試條件

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.

除非特別注明，所有測試在室溫條件下完成。

### 5.3. SAMPLE SELECTION 樣品選擇

Test samples shall be selected at random from current production. No test samples shall be reused. Samples are pre-conditioned with 10cycles of durability. Each group shall be containing 5 test samples at least.

測試樣品從現生產的產品中隨機抽取，所有測試過的樣品不得重複使用。樣品已預先插拔10次，每組測試至少有5個樣品。

### 5.4. TEST SEQUENCE 測試順序

Product qualification test sequence as shown in **Table II**.

產品品質測試順序見附表二。



**Table I: Test Requirements and Methods**

附表一：測試要求與方法

Items 項目	Requirements 要求	Test Methods 測試方法
1. Confirmation of Product 產品確認	Product shall be conforming to the requirements of applicable product drawing. 產品必須符合相關產品圖面的要求。	Visually, dimensions and functionally inspected per applicable product drawing. 依相關產品圖面，檢查產品的外觀、尺寸及功能。
2. Contact Resistance 接觸阻抗	High Power pin: 0.5 mΩ Max.initial. Low Power pin: 1.0 mΩ Max.initial. Signal pin: 25 mΩ Max.initial. Contact resistance change $\Delta$ 10 mΩ Max High Power pin 初始狀態 0.5mΩ Max, Low Power pin 初始狀態 1.0mΩ Max, Signal pin 初始狀態 25mΩ Max, 接觸電阻變化值 $\Delta$ 10 mΩ Max  Per EIA-364-06 適用：EIA-364-06	Subject mated contacts assembled in housing to closed circuit of 20 mA max. 所述固定端子連結到一個封閉回路中測試，電流 20 mA max, 電壓 20 mV max。
3. Insulation Resistance 絕緣阻抗	Power pin: 5000 MΩ Min. Signal pin: 500 MΩ Min. Power pin 最小 5000 MΩ. Signal pin 最小 500 MΩ.  Per EIA-364-21 適用：EIA-364-21	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. (500 V DC $\pm$ 10%). 測試產品相鄰端子間以及端子與接地間的電阻 (500 V DC $\pm$ 10%)。
4. Dielectric Withstanding Voltage 耐電壓	Power pin must withstand test potential of 1800 VDC RMS for 1 minute, Signal pin must withstand test potential of 500 VDC RMS for 1 minute, current leakage must be 1.0mA Max. Power pin 必須承受測試電壓 1000 VDC RMS，Signal pin 必須承受測試電壓 500VDC RMS，時間 1 分鐘，漏電流不大於 1.0 mA。  Per EIA-364-20 適用：EIA-364-20	Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. 對產品相鄰端子間以及端子與接地間加載電壓，測試其漏電流。



## PRODUCT SPECIFICATION OF Oupin

<p>5. Durability (Repeated Mating/Un-mating) 耐久性</p>	<p>Contact Resistance: After testing, no damage, Dielectric Strength should be OK; Power contact resistance 1 mΩ max and signal contact resistanc change 10mΩ max. 測試後產品無損壞，耐電壓測試 ok，電源針接觸阻抗最大 1 mΩ 和信號針接觸阻抗比初始值增大不超過 10 mΩ。</p> <p>Per EIA-364-09 適用：EIA-364-09</p>	<p>Repeat mate and unmated for connector 200 cycles, at a speed of 127mm per minute. 重復進行配合產品 200 次插拔，速度 127mm/分鐘。</p>
<p>6. Contact Retention Force 端子保持力</p>	<p>Signal pin: 8N/Pin. Min. Power pin: 10N /Pin. Min. Signal pin 每支最小 8N Power pin 每支最小 10N</p> <p>Per EIA-364-29C 適用：EIA-364-29C</p>	<p>Apply axial pull out force at a speed of 25.4±3 mm/minute on the contact assembled in the housing. 以 25.4±3mm/分鐘的速度施加軸向拉力從塑膠本體上拔出端子。</p>
<p>7. Mating /Un-mating Force 插入力/拔出力</p>	<p>Power:Mating force: 2.8N/Pin Max. Un-mating force:0.9N/pin Min. Signal: Mating force:0.35N /pin Max Un-mating force:0.1N/pin Min. Power 每 Pin 插入力最大：2.8N 每 Pin 拔出力最小：0.9N Signal 每 Pin 插入力最大:0.35N 每 Pin 拔出力最小：0.1N</p> <p>Per EIA-364-13 適用：EIA-364-13</p>	<p>At a speed of 25.4±3 mm/minute, apply axial insert the mating part into fully or pull out from the subject product. 以 25.4±3 mm/分鐘的速度，軸向完全插入對配插件到被測產品中或從被測產品中拔出。</p>
<p>8. Vibration Sinusoidal Low Frequency 低頻正弦振動</p>	<p>No electrical discontinuity less than 1μs shall occur, Power contact resistance 1.0 mΩ max and signal contact resistanc change 10mΩmax. Dielectric Strength should be OK. After testing. 不允許出現超過 1 μs 的瞬間斷開，測試後電源針接觸阻抗最大 1.0 mΩ，信號針接觸阻抗初始值增大不超過 10 mΩ。耐電壓測試 ok。</p> <p>Per EIA-364-28 適用：EIA-364-28</p>	<p>Subject mated connector at 4.90rms G amplitude, 1.5 hours each of 3 mutually perpendicular planes, 10 mA potential applied. 振幅 4.90rms G 條件下，在互相垂直的三個面上，每個面 1.5 小時下測量，電流 10 mA。</p>





## PRODUCT SPECIFICATION OF Oupin

<p>9. Thermal Shock 冷熱沖擊</p>	<p>Contact Resistance: After testing, no damage, Dielectric Strength should be OK; Power contact resistance 1.0mΩ max and signal contact resistance change 10 mΩ max. 測試後產品無損壞，耐電壓測試 ok。電源針接觸阻抗最大 1.0mΩ，信號針接觸阻抗比初始值增大不超過 10 mΩ。</p> <p>Per EIA-364-32 適用：EIA-364-32</p>	<p>Temperature range from -55°C to +105°C. Start from -55°C, after 60 minutes, change to +105°C; change time is no more than 5 minutes, total 25 cycles. 溫度變化範圍：-55°C~+105°C。從 -55°C 開始，60 分鐘後換到 +105°C，轉換時間不超過 5 分鐘，共 25 個循環。</p>
<p>10. Mechanical Shock 機械沖擊</p>	<p>Electrical discontinuity less than 1us. 電流瞬斷時間小於 1us。  Per EIA-364-27 適用：EIA-364-27</p>	<p>Accelerate Velocity: 50G; Waveform: Half-sine shock plus; Duration: 11msec; 3 drops each to normal and reversed directions of X, Y and Z axes; 速度 50G; 半正弦波; 持續 11 毫秒; ±X, ±Y, ±Z, 方向各 3 次;</p>
<p>11. Humidity- Temperature Cycle 溫濕度循環</p>	<p>Contact Resistance: After testing, no damage, Dielectric Strength should be OK; Power contact resistance 1.0mΩ max and signal contact resistance change 10 mΩ max. 測試後產品無損壞，耐電壓測試 ok。電源針接觸阻抗最大 1.0mΩ，信號針接觸阻抗比初始值增大不超過 10 mΩ。</p> <p>Per EIA-364-31E 適用：EIA-364-31E</p>	<p>Subject product to 25~65°C, 80-98%.R.H, Duration 240 hours 產品置於 25~65°C, 相對濕度：80-98%, 持續 240 小時。</p>
<p>12. Test temperature rise for rating current. 溫升測試</p>	<p>Temperature rise shall not exceed 30°C degrees. 溫升不得超過 30°C。 Ambient conditions - Still air 25°C。 周圍環境溫度 25°C。</p> <p>Per EIA-364-70 適用：EIA-364-70</p>	<p>Subject mated contacts assembled in housing to closed circuit of High Power Pin: 48.0A max. Low Power Pin 24A. Signal Pin: 1.0A max. 所述固定在外殼包的端子連結到一個封閉回路中測試，High Power Pin: 48.0A, Low Power Pin 24A, Signal Pin: 1.0A。</p>



## PRODUCT SPECIFICATION OF Oupin

<p>13. Salt Spray 鹽霧</p>	<p>Contact Resistance: After testing, no damage, Dielectric Strength should be OK; Power contact resistance 1.0mΩ max and signal contact resistance change 10 mΩ max. 測試後產品無損壞，耐電壓測試 ok。電源針接觸阻抗最大 1.0 mΩ，信號針接觸阻抗增大不超過 10 mΩ。</p> <p>Per EIA-364-26 適用：EIA-364-26</p>	<p>5±1% salt concentration 48 hours 35±2°C 鹽水濃度 5±1%，時間 48 小時，溫度 35±2°C。</p>
<p>14. High Temperature Life 高溫老化</p>	<p>Contact Resistance: After testing, no damage, Dielectric Strength should be OK; Power contact resistance 1.0mΩ max, signal contact resistance change 10 mΩ max. 測試後產品無損壞，耐電壓測試 ok。電源針接觸阻抗最大 1.0mΩ，信號針接觸阻抗比初始值增大不超過 10 mΩ。</p> <p>Per EIA-364-17 適用：EIA-364-17</p>	<p>Subject product to 140±2°C for 1008 hours continuously. 產品置於 140±2°C 連續 1008 小時。</p>
<p>15. Mixed Flowing Gas 混合氣體測試</p>	<p>After testing, no damage, Power contact resistance 1.0mΩ max, signal contact resistance change 10 mΩ max. 測試後產品無損壞，電源針接觸阻抗最大 1.0mΩ，信號針接觸阻抗增大不超過 10 mΩ。</p> <p>Per EIA-364-65 適用：EIA-364-65</p>	<p>Subject mated contacts to a mixed gas for 10 Days at 30°C. Linear flow rate to be 305mm/second. 產品對配放置在 30°C 的氣體里 10 天，氣體以每秒 305mm 流動。</p>
<p>16. Thermal Disturbance 熱干擾</p>	<p>After testing, no damage, Power contact resistance 1.0mΩ max, signal contact resistance change 10 mΩ max. 測試後產品無損壞，電源針接觸阻抗最大 1.0mΩ，信號針接觸阻抗增大不超過 10 mΩ。</p> <p>Per EIA-364-110 適用：EIA-364-110</p>	<p>Temperature range from +15±3°C to +85±3°C. Start from +15±3°C, after 5 minutes, change to +85±3°C; total 10 cycles. 溫度變化範圍：+15±3°C~ +105°C。從 +15±3°C 開始，5 分鐘後換到 +85±3°C，共 10 個循環。</p>



## PRODUCT SPECIFICATION OF Oupiin

17. Solderability 可焊性	There shall have a solder coverage of 95% minimum. 產品在測試完成後，焊接部位粘錫面積大於 95%。	Soldering time: 5seconds. Temperature: 245±5°C. 焊接時間：5 秒。 溫度：245±5°C。
	Per EIA-364-52 適用：EIA-364-52	



PRODUCT SPECIFICATION OF Oupin

**Table II: Product Qualification Test Sequence**

附表二： 產品測試順序

Test Description 測試描述	Test Group 測試分組											
	A	B	C	D	E	F	G	H	I	J	K	L
1. Conformation of Product 產品確認	1,7	1	1,9	1,9	1,9	1,9	1,9	1,9	1,9	1,9	1,9	1
2. Contact Resistance 接觸阻抗	2,6		2,6	2,6	2,6	2,6	2,6	2,6	2,6	2,6	2,6	
3. Insulation Resistance 絕緣阻抗	3		3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	3,7	
4. Dielectric Withstanding Voltage 耐電壓	4		4,8	4,8	4,8	4,8	4,8	4,8	4,8	4,8	4,8	
5. Durability 耐久性	5											
6. Contact Retention Force 端子保持力		3										
7. Mating/Un-mating Force 插入/拔出力		2										
8. Vibration 機械振動			5									
9. Thermal Shock 溫度衝擊				5								
10. Mechanical Shock 機械沖擊					5							
11. Humidity-Temperature Cycle 溫濕度循環						5						
12. Current rating 溫升測試							5					
13. Salt Spray 鹽霧								5				
14. High Temperature Life 高溫老化									5			
15. Mixed Flowing Gas 混合氣體測試										5		
16. Thermal Disturbance 熱干擾											5	
17. Solder-ability 可焊性												2




**Table III : Reflow Soldering Profile**

附表三：回流焊接曲線圖

**Lead-free reflow profile requirements:**

無鉛回流焊接曲線

Parameter 参数	Reference 参考	Specificatin 规格
升溫區 Ramp-up	25°C ~150°C	3°C/S Max
預熱區(Pre-heating) Temperature Min( $T_{s_{min}}$ ) Temperature Max( $T_{s_{max}}$ ) Time( $T_{s_{min}}$ to $t_{s_{max}}$ )	150°C ~200°C	60~180sec
Time maintained above(保持时间) Temperature( $T_L$ ) Time( $t_L$ )Reflow	217°C	60~150sec
Time within 5°C of actual peak Temperature( $t_p$ )	260-/+5°C	20~40sec
冷卻區 Cooling	Peak Temp.~150°C	-6°C/S(Max)
Time 25°C to Peak Temperature	25°C ~ Peak Temp.	8 minutes maximum

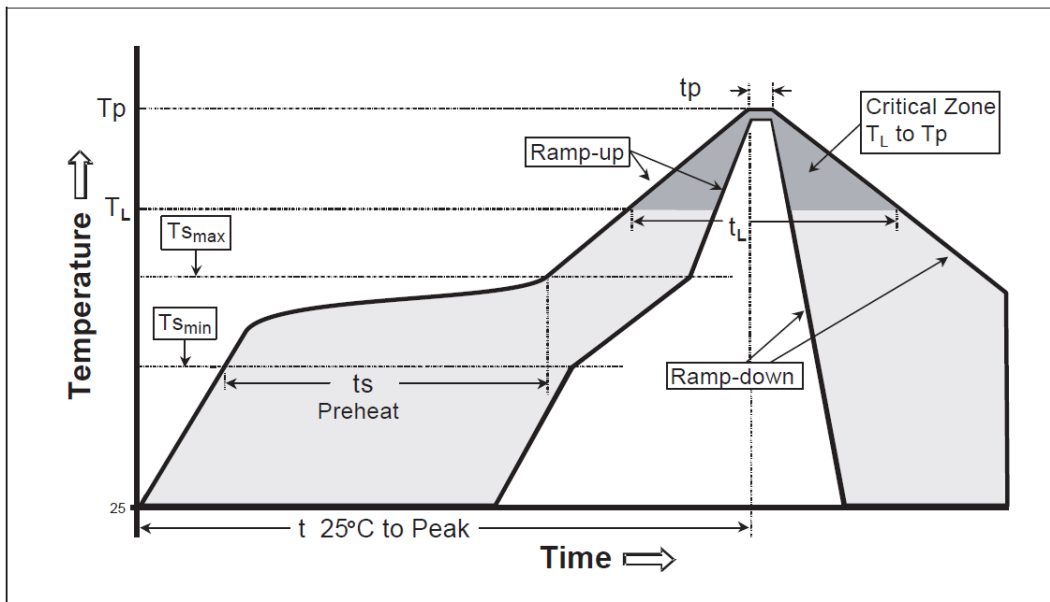

This profile is the minimum requirement for evaluating soldering heat resistance of components. Heat transfer method used for reflow soldering is hot air convection. The actual air temperatures used to achieve the specified profile largely dependent on the reflow equipment.

這個曲線圖是評估元件器件焊接抗熱的基本要求。應用在對焊接中的熱傳遞方式是熱氣對流。達到特定曲線圖地實際溫度主要依賴與回流焊接設備。