

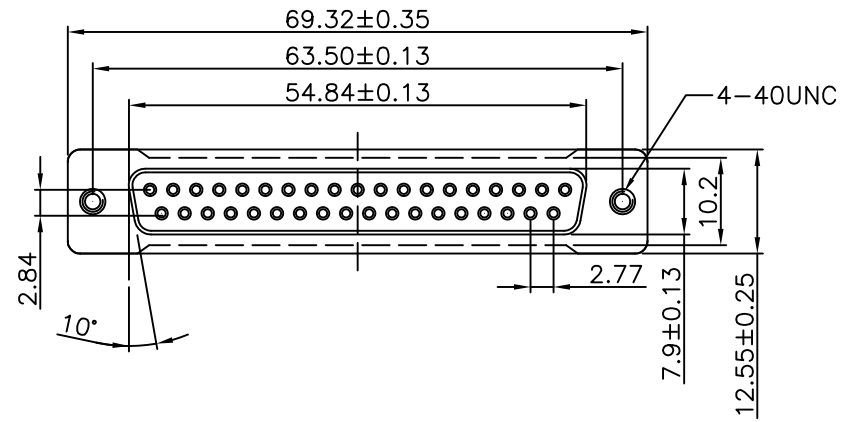
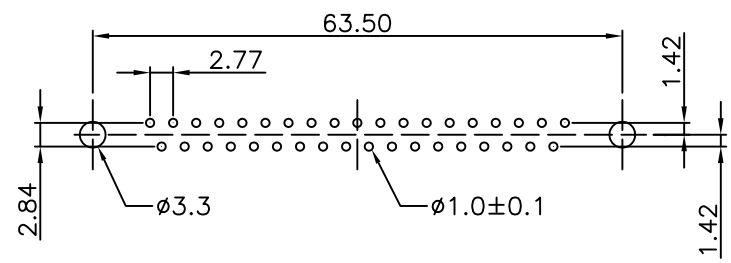


REV.	SPECIFICATION	ECN NO.	APPD.



Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 100u" Min Tin Plated on Solder Tail over Nickel 50 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 1000MΩ min. at DC 500V
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

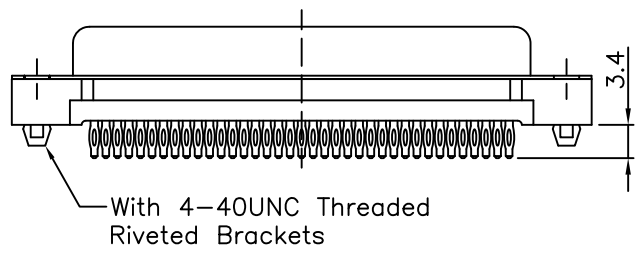

P.C.Board Layout

7905- 37 F T B P C 00 N3 A
Series Position F: Female B: Black P: Press Fit Type C: Selective Gold Plated 00: G/F N3: With 4-40UNC Threaded Riveted Brackets(Board Locks) A: Tray Package

Tolerances	Dwg. No.	7905D02021	Title:		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7905-37FTBPC00N3A
x = ±0.5	Projection		7905 Series		
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	jia-chi 01/03'18	D-SUB Straight Press fit type		
					SHEET 1/1
					Ver.No. A4