


REV.	SPECIFICATION	ECN NO.	APPD.

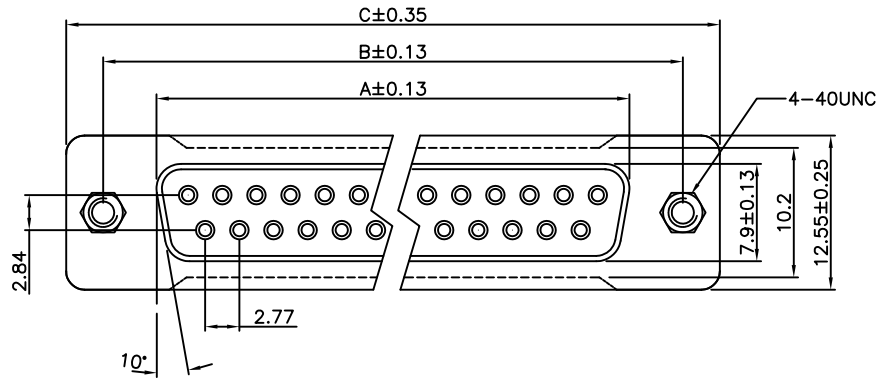

Material:

Housing: PBT, UL94V-0.

Contacts: Brass, Gold Plated on Contact Area and 100u" Min Tin Plated on solder tail over Nickel 50u" Min .

Shell: Steel.

Electrical Characteristics:

Current Rating: 3 AMP.




Dielectric Withstanding Voltage: AC 1000V for 1 minute.

Insulation Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

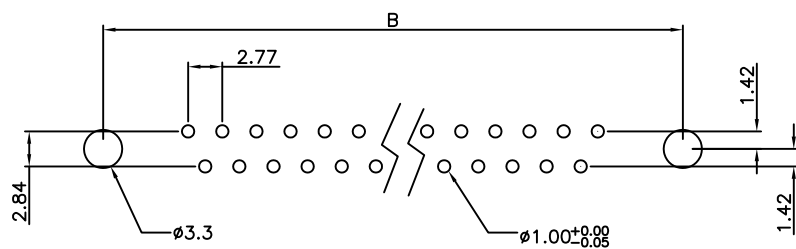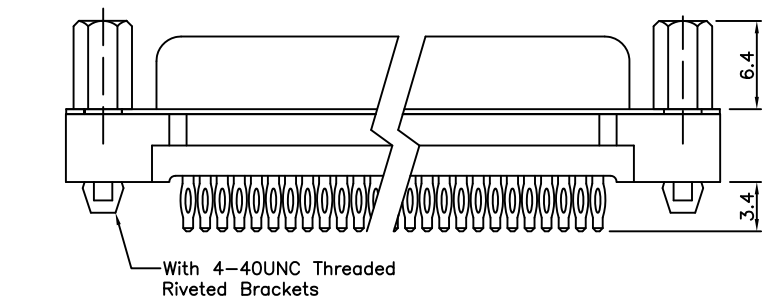

P.C.Board Layout

Series: 7905-xx
 Position: F T B P C
 F: Female
 B: Black
 P: Press Fit Type
 C: Selective Gold Plated
 A: Tray Package
 N3N6: With 4-40UNC Threaded Riveted Brackets and Jack Screws Assembled
 00: G/F

Position	Dimension		
	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

Tolerances	Dwg. No.	7905D02022	Title:	7905 Series D-SUB Straight Press Fit Type
x = ±0.50	Projection		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7905-xxFTBPC00N3N6A	
.x = ±0.25	Unit	mm		
.xx = ±0.15	Scale	1:1		
	Drawn By	jia-chi 01/03'18	①747	

SHEET	1/1	Ver.No.	A6
-------	-----	---------	----