
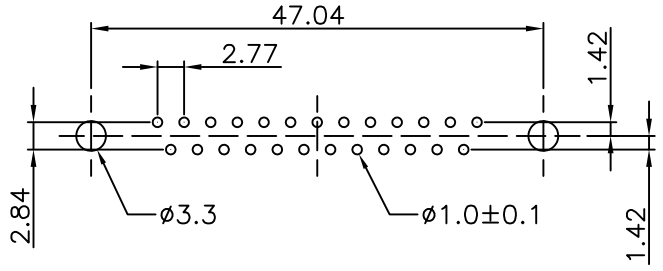

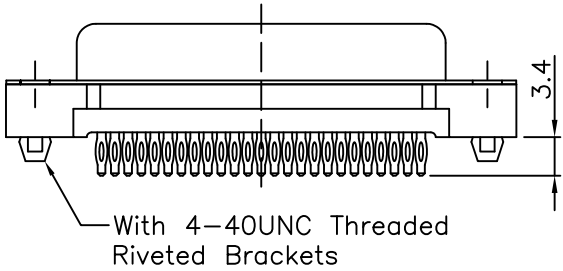


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and 100u" Min Tin Plated on Solder Tail over Nickel 50 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulation Resistance: 1000MΩ min. at DC 500V
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

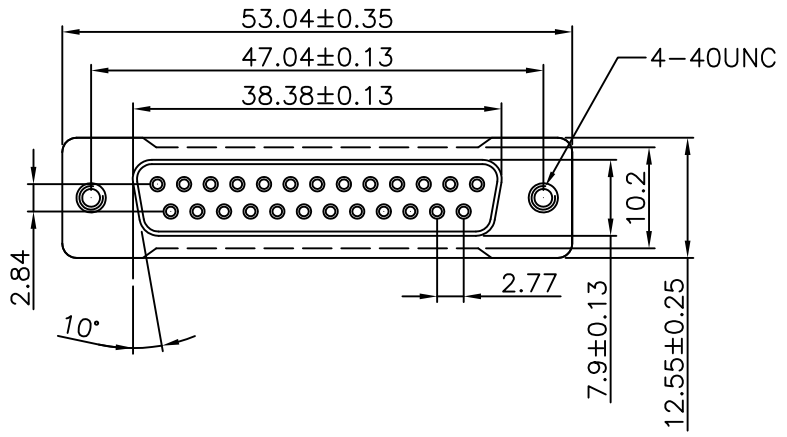

7905- 25 F T B P C 00 N3 A
Series ————
Position ————
F: Female ————
B: Black ————
P: Press Fit Type ————
A: Tray Package
N3: With 4-40UNC Threaded Riveted Brackets(Board Locks)
00: G/F
C: Selective Gold Plated

P.C.Board Layout

Tolerances	Dwg. No.	7905D02020	Title:		OUPIN OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7905-25FTBPC00N3A
x = ±0.5	Projection		7905 Series		
.x = ±0.25	Unit	mm	D-SUB Straight		
.xx = ±0.15	Scale	1:1	Press fit type		
	Drawn By	jia-chi 01/03'18	Ver.No.	1/1	A4