
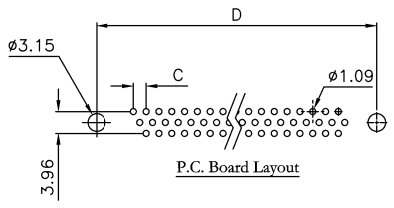
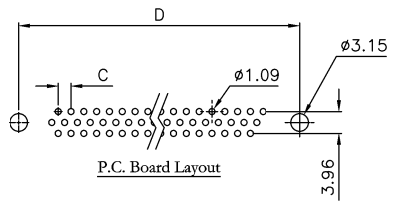

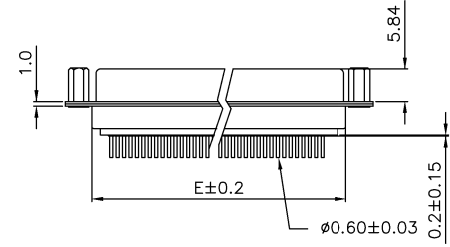

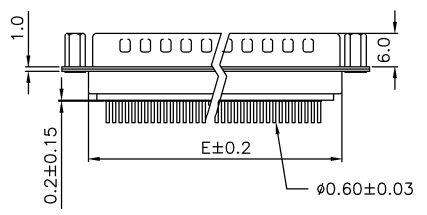
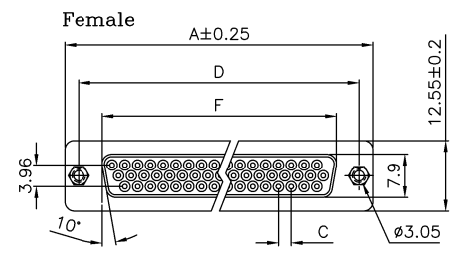


REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated over Nickel 30 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulation Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

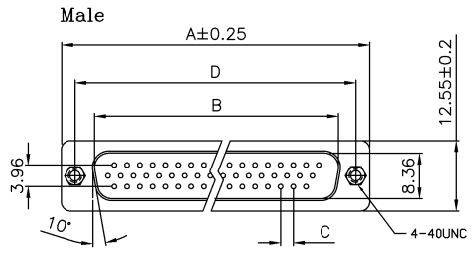

7915- xx M T B G 00 N1 A
Series ————
Position ————
M: Male
F: Female
B: Black
U: Blue
W: White
A: Tray Package
N1: With NUTS #4-40 Threaded Riveted on Face Side
00: Gold Flash
G: Gold Plated

Position	Dimension					
	A	B	C	D	E	F
15	30.8	16.9	2.29	24.99	19.3	16.3
26	39.1	25.3	2.29	33.32	27.5	24.7
44	53.0	39.0	2.29	47.04	41.3	38.4
62	69.3	55.4	2.41	63.50	57.7	54.8

Tolerances	Dwg. No.	7915D03009	Title:	7915 Series H.D. D-SUB Straight Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N:7915-xxMTBG00N1A&7915-xxFTBG00N1A		
x = ±0.5	Projection		SHEET 1/1 Ver.No. A1				
.x = ±0.25	Unit	mm				Scale	1:1
.xx = ±0.15	Drawn By	Martin				06/23'22	767