
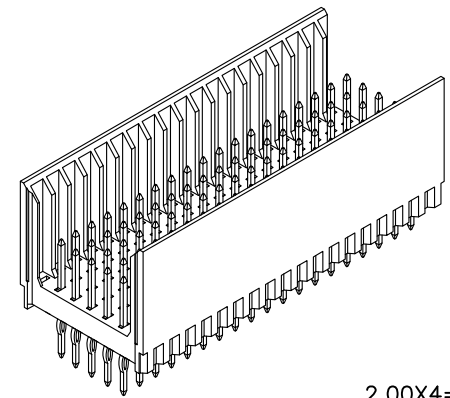





REV.	SPECIFICATION	ECN NO.	APPD.
R1		ECN120214	

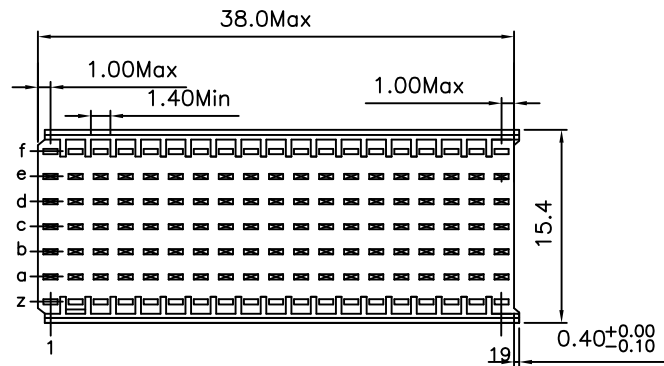


Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min.at DC 500V.
Contact Resistance: 20mΩ max.at DC 100mA.
Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

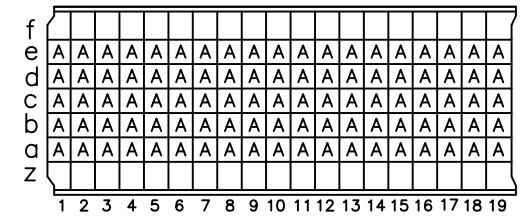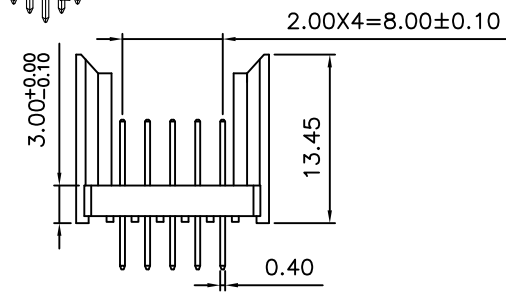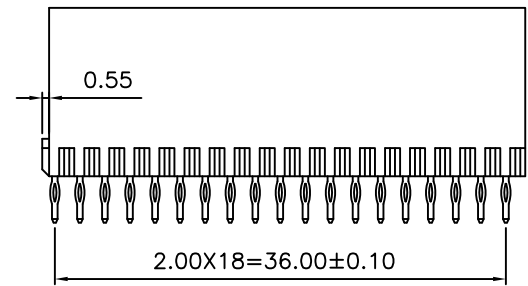

CONTACT LAYOUT

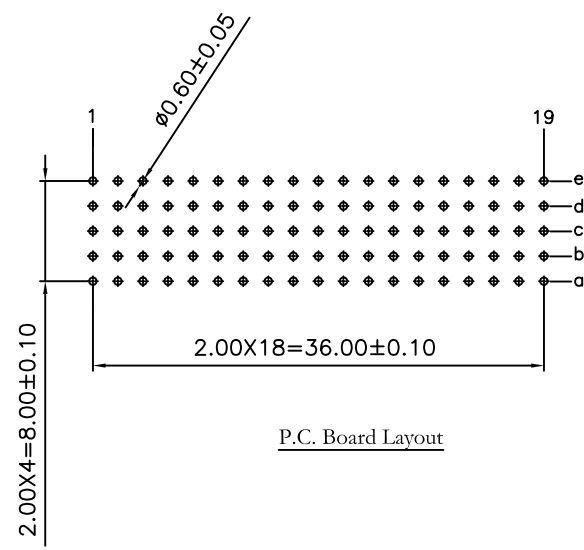


P.C. Board Layout

9111- 7 1 B 133 A C xx U

Series: 7Row: 1: Male B: Type B Housing Type A:A Option

U: Tube Package
10: 10 u"
30: 30 u"
C: Dip Tin Plated Contact Gold Plated
CB: Dip Tin Plated Contact Au+Pd/Ni Plated
G: Gold Plated

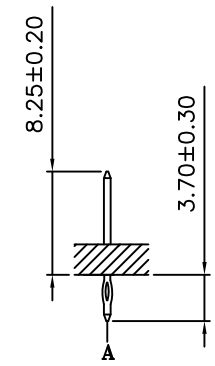

Tolerances	Dwg.No.	9111D71025		Title:	9111 Series 2.00 Hard Metric Connectors Male Type B-19		
x = ±0.5	Projection	⊕ ◁		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-71B133ACxxU SHEET 1/1 Ver.No. R1			
.x = ±0.25	Unit	mm	Scale				1:1
.xx = ±0.15	Drawn By	Liyuanyuan 02/13'12					