


P.C. Board Layout
(Top View)

9111- 7 1 B 133 G C xx U
 Series
 7Row
 1: Male
 B: Type B
 Housing Type
 G: G Option
 U: Tube Package
 10: 10 u"
 30: 30 u"
 C: Dip Tin
 Contact Gold
 G: Gold

f	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
e	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
d	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
c	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
b	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
a	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
z																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19

CONTACT LAYOUT

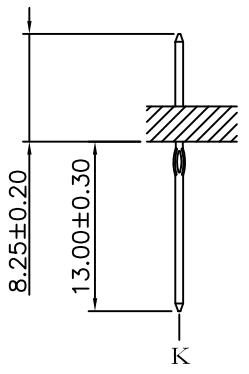

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0
 Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 750V For 1 minute.
 Insulator Resistance: 10000MΩ min.at DC 500V.
 Contact Resistance: 20mΩ max.at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

Tolerances	Dwg. No.	9111D71057		Title:	
x = ±0.5	Projection	⊕ ⊖		9111 Series	
.x = ±0.25	Unit	mm	Scale	2.00 Hard Metric	
.xx = ±0.15	Drawn By	Zhu QL	08/15'12	Connectors Male	
				Type B-19	

9111 Series
 2.00 Hard Metric
 Connectors Male
 Type B-19

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-71B133GCxxU			
SHEET	1/1	Ver.No.	R1

REV.	SPECIFICATION	ECN NO.	APPD.
R1			