



PRODUCT SPECIFICATION OF Oupiin

PRODUCT SPECIFICATION

產品規格書

產品名稱 Description	產品料號 Part No.	圖號 Drawing No.
High Power Card Edge	9302-4P02S20B11BCB30DA	9302-D0000-023

PRODUCT NAME 產品名稱	DOCUMENT No.: 文件編號	Rev. 版本	OUPIIN
High Power Card Edge (RoHS)	9302spec-4P02	E	歐品電子
	Approved 核准	Checked 審核	Prepared 制作
	Q.A. Section Chief	Jack Hsing	2020.10.28



PRODUCT SPECIFICATION OF Oupiin

1. SCOPE 適用範圍

This product specification defines the product performance and the test methods to ascertain the performance of the High power edge connector , which is designed and manufactured by Oupiin Electronic Co., Ltd. This product specification is applicable but not only for those part numbers which be shown in the cover page.

本產品規格書規定了由歐品電子有限公司設計生產的 High power edge connector 型連接器產品的特性及測試方法。本產品規格書適用於但不局限於封面所顯示的產品料號。

2. REFERENCE DOCUMENTS 參考文件

MIL-STD-1344	Test method for electrical connector 電子連接器測試方法
MIL-STD-202	Test method for electrical components 電子零件測試方法
EIA364	Test method for electrical components 電子零件測試方法
JIS C 0051	Test method for electrical components 電子零件測試方法
MIL-G-45204C	Specification for gold plating 鍍金規格
IEC-512-3	IEC standard for current carrying capacity tests IEC電流測試標準
QQ-N-290A	Specification for nickel plating 鍍鎳規格
MIL-P-81728A	Specification for tin/lead plating 鍍錫鉛規格
MIL-T-10727B	Specification for tin plating 鍍錫規格
UL1977	UL standard for safety of attachment plug and receptacle UL安規要求標準

3. FEATURE & DIMENSIONS 特徵及尺寸

3.1. PRODUCT DIMENSION 產品尺寸

These connectors shall have the dimensions as shown in drawing.

本產品的相關尺寸參見圖面。


3.2. MALE AND FEMALE PRODUCT 公母產品裝配

3.2.1. Perpendicular to engaging direction 垂直插入方向


The design of the centering and guiding in the mpc of the free and fixed board connector modules shall accept a misalignment of 0.25MM in transverse and 0.23MM in longitudinal axes of the connector.

固定板連接器模件的Mpc裡，連接器設計中心線橫向可接受0.25mm和縱向可接受0.23mm的偏差。

PRODUCT SPECIFICATION OF Oupiin

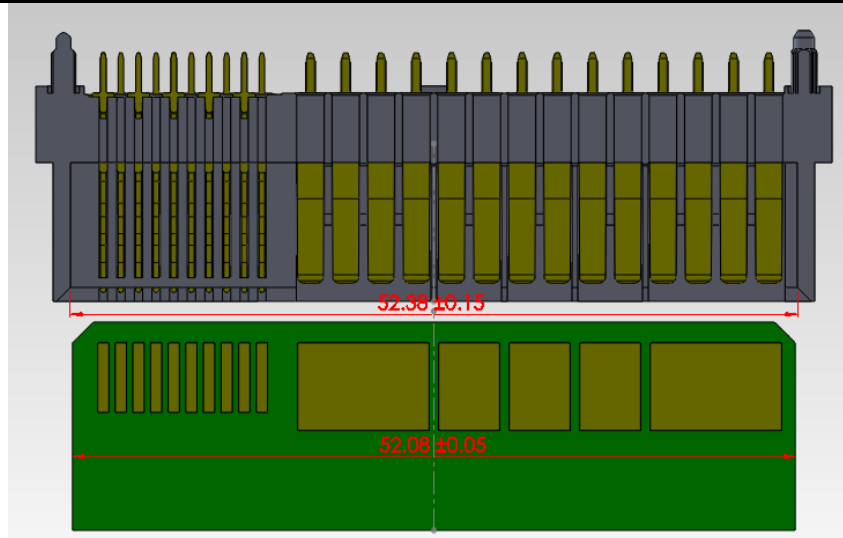

allowed misalignment in transverse axes 在橫向方向允許對插偏差量 $(52.53-52.03)/2=0.25\text{mm}$ 最大


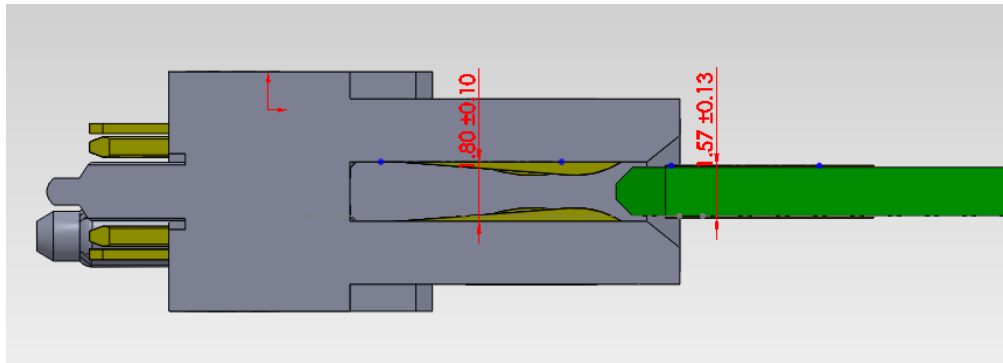


allowed misalignment in longitudinal axes 在縱向方向允許對插偏差量 $(1.90-1.44)/2=0.23\text{mm}$ 最大

3.2.2 Inclination 傾向

The center and guiding in the Mpc OF the free and the fixed board connector modules shall allow an initial angular misalignment of 2° Max in the transverse and longitudinal axes

固定板連接器模件的在Mpc裡,連接器可接受橫向和縱向 2° 的最大傾斜對插角度。

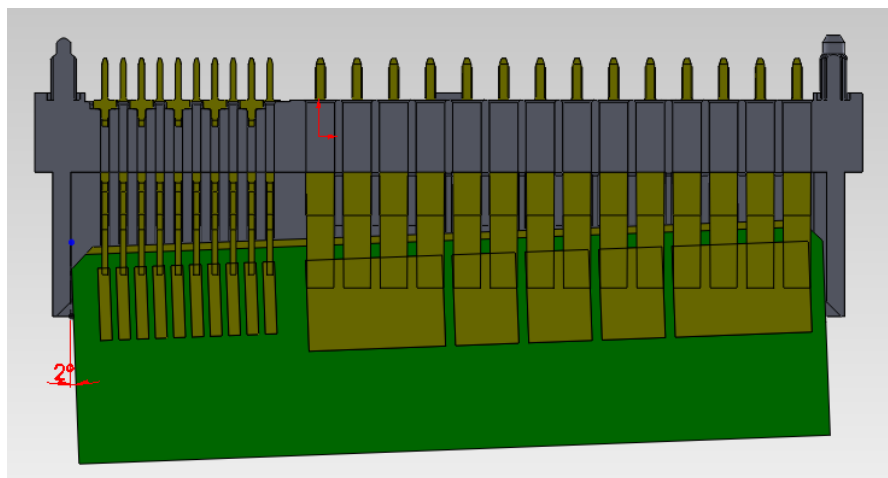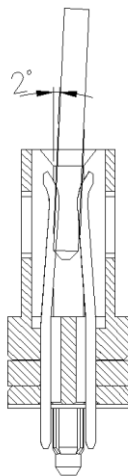




PRODUCT SPECIFICATION OF Oupiin

3.2.3 Capability for products wipe length

產品接觸長度等級

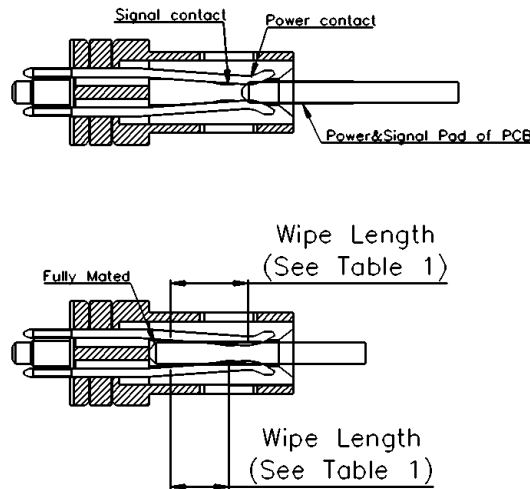

CONTACT	MATING LEVEL	WIPE LENGTH(MIN)
Power Pin	1	5.33mm
Signal Pin	1	4.02mm

3.3. PCB/PANEL LAYOUT 印刷電路板佈局

The recommended PCB layout is shown in drawing.

本產品適用的 PCB layout 參見圖面。

3.4. BILL OF MATERIAL 材料清單

Harmful material controlling follows the requirements of RoHS. The bill of material is described in drawing.

有害物質控制符合RoHS指令要求。本產品使用的材料參見圖面。

3.5. MECHANICAL & ELECTRICAL CHARACTERISTIC 機械及電氣特性

The connector shall have the mechanical and electrical performance as described in drawing.

本產品的機械及電氣特性參見圖面。

3.6. PACKAGING 包裝

Products shall be packaged according to requirements specified in purchase order for safe delivery, connector container and the packaging method are shown in package specification.

產品可依客戶指定要求包裝，包裝材料與包裝方式參見產品包裝規範。



PRODUCT SPECIFICATION OF Oupiin

3.7. RATING CURRENT AND RATING VOLTAGE 額定電流與額定電壓

Rating current: Power pin: 12.5A (UL) Signal pin: 1.5A

額定電流: Power pin: 12.5A (UL) Signal pin : 1.5A

Rating voltage : Power pin 250V Signal pin 30V

額定電壓: Power pin 250V Signal pin 30V

3.8. STORAGE AND OPERATING TEMPERATURE 存貯與使用溫度

Temperature range: -55 °C~+105°C, including terminal temperature rise for rating current.

Storage Temperature :0°C~+40°C, Humidity: 80%RH under , Time limit is 18 months the products are stored .

溫度範圍 : -55°C~+105°C,包含接觸端子的額定電流溫升.

儲存溫度 : 0°C~+40°C · 濕度 : 80%RH 以下,產品限存時間為 18 個月.

4. ENVIRONMENTAL (環境要求)

4.1. SOLDERABILITY (可焊性)

Connectors meet solder ability to EIA-364-52 Finish shall be free of contaminants.

(產品可焊性符合EIA-364-52 標準規定的相關要求, 表面不得有污染物.)

4.2. RESISTANCE TO SOLDER HEAT (耐焊接熱)

4.2.1. WAVE SOLDER 波峰焊接

Each cycle consists of three consecutive phases. as shown in **Table III**.

每個焊接週期包括三個連續的階段,見附表三。

Note: 說明

Device temperature measurements are referenced from the top-center of the package outer surface.

設備溫度量測時以從頂部中間位置測量為準。

5. PERFORMANCE AND TEST DESCRIPTION 性能及測試

5.1. REQUIREMENT 要求

Product is designed to meet electrical, mechanical, and environmental performance requirements specified in **Table I**.

本產品設計符合附表一所述的機械, 電氣及環境要求。

5.2. TEST CONDITION 測試條件

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.

除非特別注明, 所有測試在室溫條件下完成。



PRODUCT SPECIFICATION OF Oupiin

5.3. SAMPLE SELECTION 樣品選擇

Test samples shall be selected at random from current production. No test samples shall be reused. Samples are pre-conditioned with 10cycles of durability. Each group shall be containing 5 test samples at least.

測試樣品從現生產的產品中隨機抽取，所有測試過的樣品不得重複使用。樣品已預先插拔10次，每組測試至少有5個樣品。

5.4. TEST SEQUENCE 測試順序

Product qualification test sequence as shown in **Table II**.

產品品質測試順序見附表二。



PRODUCT SPECIFICATION OF Oupiin

Table I: Test Requirements and Methods

附表一：測試要求與方法

Items 項目	Requirements 要求	Test Methods 測試方法
1. Confirmation of Product 產品確認	Product shall be conforming to the requirements of applicable product drawing. 產品必須符合相關產品圖面的要求。	Visually, dimensions and functionally inspected per applicable product drawing. 依相關產品圖面，檢查產品的外觀、尺寸及功能。
2. Contact Resistance 接觸阻抗	Power pin: 0.6 mΩ Max. initial. Signal pin: 25 mΩ Max. initial. Signal pin Contact resistance change $\Delta 10 \text{ m}\Omega \text{ Max}$ Power pin 初始狀態 0.6mΩ Max, Signal pin 初始狀態 25mΩ Max, Signal pin 接觸電阻變化值 $\Delta 10 \text{ m}\Omega \text{ Max}$	EIA 364-06 Subject mated contacts assembled in housing to closed circuit of 20 mA max. 所述固定端子連結到一個封閉回路中測試, 電流 20 mA max, 電壓 20 mV max。
3. Insulation Resistance 絕緣阻抗	Power pin: 5000 MΩ Min. Signal pin: 500 MΩ Min. Power pin 最小 5000 MΩ. Signal pin 最小 500 MΩ.	EIA-364-21 (500 V DC \pm 10%). Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. 測試產品相鄰端子間以及端子與接地間的電阻。
4. Dielectric Withstanding Voltage 耐電壓	Power pin must withstand test potential of 1000 VDC RMS for 1 minute, current leakage must be 1.0mA Max. Signal pin must withstand test potential of 500 VDC RMS for 1 minute, current leakage must be 1.0mA Max. Power pin 必須承受測試電壓 1000 VDC RMS, 時間 1 分鐘, 漏電流不大於 1.0 mA。 Signal pin 必須承受 測試電壓 500 VDC RMS, 時間 1 分鐘, 漏電流不大於 1.0 mA。	EIA-364-20 Measure by applying test potential between the adjacent contacts, and between the contacts and ground in the mated connector. 對產品相鄰端子間以及端子與接地間加載電壓，並測試其漏電流。



PRODUCT SPECIFICATION OF Oupiin

<p>5. Durability (Repeated Mating / Un-mating) 耐久性</p>	<p>Power contact resistance less than 0.6mΩ and signal contact resistance change 10 mΩ max. After testing. 測試後電源針接觸阻抗不超過 0.6 mΩ, 信號針接觸阻抗比初始值增大不超過 10 mΩ。</p>	<p>EIA-364-09 Repeat mate and unmated for connector 200 cycles, at a speed of 25.4±3 mm per minute. 重復進行配合產品 200 次插拔, 速度 25.4±3 mm/分鐘。</p>
<p>6. Contact Retention Force 端子保持力</p>	<p>Signal pin: 5N/Pin. Min. Power pin: 32N/Pin. Min. Signal pin 每支最小 5N. Power pin 每支最小 32N</p>	<p>EIA-364-29 Apply axial pull out force at a speed of 25.4±3 mm/minute on the contact assembled in the housing. 以 25.4±3mm/分鐘的速度施加軸向拉力從塑膠本體上拔出端子。</p>
<p>7. Mating / Un-mating Force 插入力/拔出力</p>	<p>Power: Mating force: 0.90N /pin Max. Un-mating force: 0.25N /pin Min Signal: Mating force: 0.28N /pin Max. Un-mating force: 0.06N /pin Min Power 插入力最大: 0.90N /pin Max 。拔出力最小: 0.25N /pin Min Signal 插入力最大: 0.28N /pin Max 。拔出力最小: 0.06N /pin Min</p>	<p>EIA-364-13 At a speed of 25.4±3 mm/minute, apply axial insert the mating part into fully or pull out from the subject product. 以 25.4±3 mm/分鐘的速度, 軸向完全插入對配插件到被測產品中或從被測產品中拔出。</p>
<p>8. Vibration 機械振動</p>	<p>No electrical discontinuity less than 1μs shall occur, Power contact resistance 0.6 mΩ max and signal contact resistance change 10 mΩ max. After testing. 不允許出現超過 1 μs 的瞬間斷開, 測試後電源針接觸 阻抗最大 0.6mΩ, 信號針接觸阻抗比 初始值增大不超過 10 mΩ。</p>	<p>EIA-364-28. Subject mated connector to 10-500 Hz traversed in 1 minute at 1.5mm amplitude, 2 hours each of 3 mutually perpendicular planes, 10 mA potential applied. 對測試產品, 在頻率變化每分鐘從 10-500 Hz, 振幅 1.5 mm 條件下, 在互相 垂直的三個面上, 每個面 2 小時下測量, 電流 10 mA。</p>
<p>9. Thermal Shock 溫度沖擊</p>	<p>After testing, no damage, Dielectric Strength should be OK; Power contact resistance 0.6mΩ max and signal contact resistance change 10 mΩ max. 測試後產品 無損壞, 電源針接觸阻抗最大 0.6mΩ, 信號針接觸阻抗比 初始值 增大不超過 10 mΩ。</p>	<p>EIA-364-32 Temperature range from -55°C to +85°C. Start from -55°C, after 30 minutes, change to +85°C; change time is no more than 5 minutes, total 5 cycles. 溫度變化範圍: -55°C~ +85°C。從 -55°C 開始, 30 分鐘後換到+85°C, 轉換時間不超過 5 分鐘, 共 5 個循環。</p>



PRODUCT SPECIFICATION OF Oupiin

<p>10. Mechanical Shock 機械衝擊</p>	<p>No electrical discontinuity less than 1us. 電流瞬斷時間小於 1us.</p>	<p>EIA-364-27 Accelerate Velocity:490m/s²; Waveform:Half-sine shock plus; Duration:11msec; 3drops each to normal and reversed directions of X,Y and Z axes; 速度 490m/s²; 半正弦波; 持續 11 毫秒; ±X, ±Y,±Z, 方向各 3 次.</p>
<p>11. Humidity- Temperature Cycle 溫濕度循環</p>	<p>After testing, no damage, Dielectric Strength should be OK, Power contact resistance 0.6 mΩ max and signal contact resistance change10 mΩ max. 測試後產品無損壞，電源針接觸阻抗不超過 0.6 mΩ，信號針接觸阻抗比初始值增大不超過 10 mΩ。</p>	<p>EIA-364-31 Subject product to 25~65°C, 90-95%.R.H 4Cycles. Each cycle lasted 24 hours. 產品置於 25~65°C,相對濕度: 90-95%, 循環 10 次, 24 小時循環一次.</p>
<p>12. Test temperature rise for rating current 溫升測試</p>	<p>The temperature above shall not exceed housing's RTI. 溫度不能超過塑膠的 RTI 值 (以 UL 標準執行) Ambient conditions - Still air 25°C. 周圍環境溫度 25°C。</p>	<p>EIA-364-70 Subject mated contacts assembled in housing to closed circuit of Power Pin: 12.5A (UL) max. Signal Pin:1.5A max. 所述固定在外殼包的端子連結到一個封閉回路中測試, Power Pin:12.5 A(UL), Signal Pin: 1.5A。</p>
<p>13. Salt Spray 鹽霧</p>	<p>After testing, no damage, Dielectric Strength should be OK. Power contact resistance 0.6 mΩ max and signal contact resistance change10 mΩ max. 測試後產品無損壞，電源針接觸阻抗不超過 0.6 mΩ，信號針接觸阻抗比初始值增大 不超過 10mΩ。</p>	<p>EIA-364-26. 5±1% salt concentration(PH=7.0) ,48 hours 35±2°C . 鹽水濃度 5±1%(PH=7.0),時間 48 小時，溫度 35±2°C。</p>
<p>14. High Temperature Life 高溫老化</p>	<p>After testing, no damage, Dielectric Strength should be OK; Power contact resistance 0.6 mΩ max and signal contact resistance change10 mΩ max. 測試後產品無損壞，電源針接觸阻抗不超過 0.6 mΩ，信號針接觸阻抗比初始值增大 不超過 10 mΩ。</p>	<p>EIA-364-17 Subject product to 105°C for 240 hours continuously. 產品置於 105°C 連續 240 小時。</p>



PRODUCT SPECIFICATION OF Oupiin


15. Solder ability 可焊性	There shall have a solder coverage of 95% minimum。 產品在測試完成後，焊接部位粘錫面積大於 95%。	EIA-364-52 Soldering time: 5 seconds. Temperature: 245±5°C. 焊接時間：5 秒。溫度：245±5°C。
---------------------------	--	---



PRODUCT SPECIFICATION OF Oupiin

Table III : Weld the curve graph in crest

附表三：波峰焊曲線圖

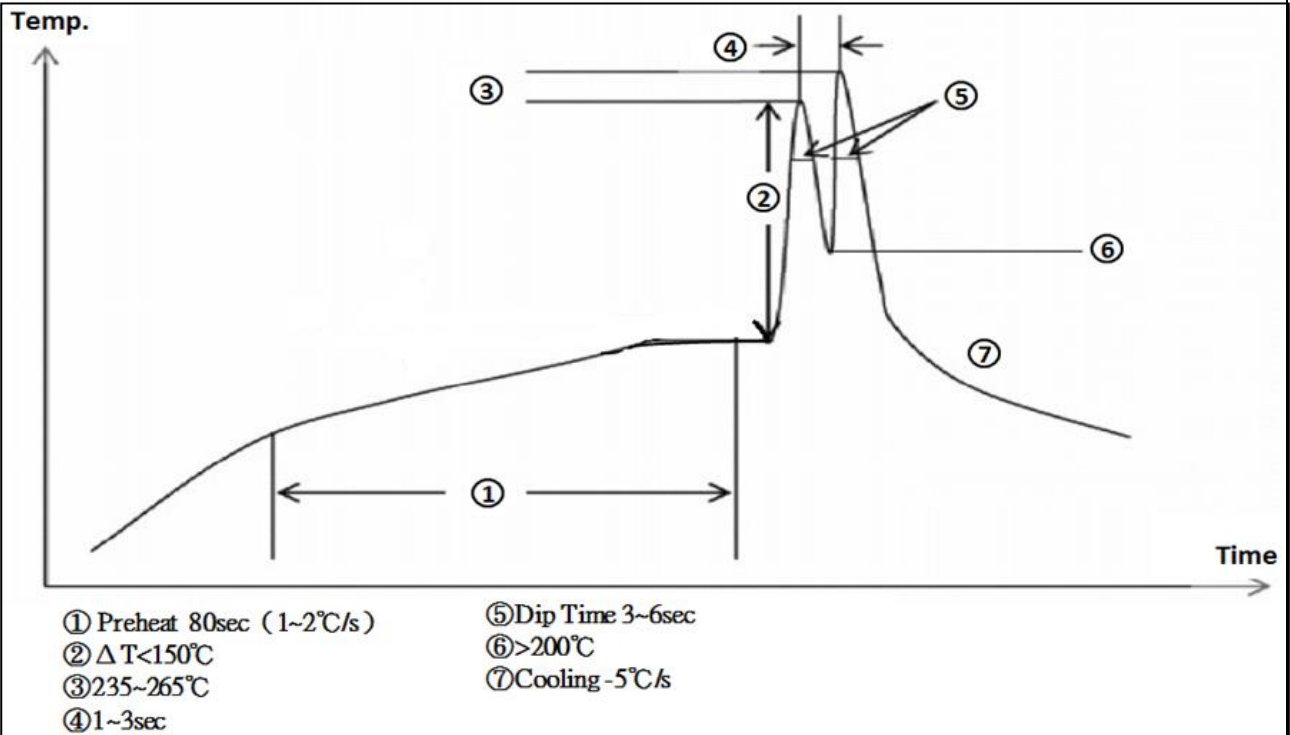



PRODUCT SPECIFICATION OF Oupiin

Material Housing : 074-LCP(Black)

[SGS Test Report Click here](#)

[如需 SGS 測試報告請點選此處](#)

江苏沃特特种材料制造有限公司
Jiangsu WOTE High Performance Materials Co., LTD.

产品材质证明

Certificate Of Quality

No. 190970

客户名称 Customer	欧品电子（昆山）有限公司				
产品名称 Product	LCP	产品牌号 Grade	KC184BLM		
生产批号 Lot No.	190922A	产品颜色 Colour	黑色		
产品数量/KG Quantity	2000	生产日期 Date	2019. 09. 22		
性能 Property	单位 Units	测试标准 Test method	测试条件 Test condition	管控范围 Control range	检测结果 Value
相对密度 Relative Density	g/cm ³	ASTM D792	23℃	≥1.55	1.61
弯曲强度 Flexural Strength	MPa	ASTM D790	23℃ 3mm/min	≥160	177
弯曲应变 Flexural strain	%	ASTM D790	23℃ 3mm/min	≥1.5	1.6
弯曲模量 Flexural Modulus	GPa	ASTM D790	23℃ 3mm/min	≥11.5	14.2
热变形温度 Heat Deflection Temperature	℃	ASTM D648	120℃ /h, 1.82MPa	≥255	266
结论 Result:					
检验人(Examiner): 刘彬			确认人(Confirmor): 周玲		
<p>The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report can not be reproduced except in full without prior written permission of the company.</p> <p>除非另有说明，以上数据是我司实验室在特定条件下测出的参考数据，本报告未经本公司书面许可，不可复制或部分复制。</p>					



PRODUCT SPECIFICATION OF Oupiin

Material Housing :UL

iq.ul.com

Component - Plastics [guide info] E478701

Jiangsu Wote High Performance Materials Co Ltd
No. 5-3, Weijia RD, Economic development zone, Dongtai CN

KC184(2)
Liquid Crystal Polymer (LCP), "SELCION", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HA1	RTI Elec	RTI Imp	RTI Str
NC, BK	0.3 3.0	V-0 V-0	4 0	4 4	130 130	130 130	130 130

Comparative Tracking Index (CTI): 3
Dielectric Strength (kV/mm): -
High-Voltage Arc Tracking Rate (HVRT): 1
Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -
Volume Resistivity (10⁹ ohm-cm): -
High Volt, Low Current Arc Resis (D465): 4

(2) - Represented by one, two or three numbers or letters.

ANDUL01 small-scale test data does not pertain to building materials, furnishings and related contents. ANDUL 04 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 2006-12-13
Last Revised: 2016-02-26 © 2016 UL LLC

Test Name	Test Method	Units	Thk (mm)	Value
Flammability	IEC 60695-11-10	Class (color)	0.3	V-0 (NC, BK)
			3.0	V-0 (NC, BK)
Glow-Wire Flammability (GWF)	IEC 60695-2-12	C	-	-
Glow-Wire Ignition (GWI)	IEC 60695-2-13	C	-	-
IEC Comparative Tracking Index	IEC 60112	Volts (Max)	-	-
IEC Ball Pressure	IEC 60695-10-2	C	-	-
ISO Peak Deflection (1.80 MPa)	ISO 75-2	C	-	-
ISO Tensile Strength	ISO 527-2	MPa	-	-
ISO Flexural Strength	ISO 178	MPa	-	-
ISO Tensile Impact	ISO 8256	kJ/m ²	-	-
ISO Izod Impact	ISO 180	kJ/m ²	-	-
ISO Charpy Impact	ISO 179-2	kJ/m ²	-	-



PRODUCT SPECIFICATION OF Oupiin

Material Power Pin : I800-C19210

[SGS Test Report Click here](#)

如需 SGS 測試報告請點選此處

 宁波博威合金板带有限公司 Ningbo Powerway Alloy Plate and Strip Co., Ltd									
质量证明书 CERTIFICATE OF QUALITY									
客户名称 Customer	昆山维迎达电子材料有限公司		生产批号 Batch number	2219100170201 - (0202)	出货日期 Delivery Date	2019-10-31	执行标准 Standard	JISH 3100-2012	
产品名称 Product	铁青铜	牌号 Grade	C1921	规格 Specifications	0.5*200	状态 Temper	H/2	重量 Weight	1039.8k g
检验和测试项目 Inspect And Test Items 化学成分 Chemical composition%									
化学元素 Chemical Element	Cu	Fe	P	Cd					
标准要求 Required Value	余量 Remainder	0.05-0.15	0.015-0.05	-					
实测值 Actual Value	余量 Remainder	0.119	0.035	ND					
物理性能 Mechanical Properties									
物理性能 Mechanical Properties	延伸率% Elongation	抗拉强度 (MPa) Tensile Strength	维氏硬度 (HV) Vickers Hardness	粗糙度(um) Surface Roughness(Ra)	导电率%IACS Conductivity	屈服强度 (MPA) Yield Strength			
标准要求 Customer Requirement	/	/	120-130	/	≥85	/			
实测值 Actual Value	9.5	430	128	0.083	91.64	425			
外观尺寸 Appearance And Dimensions									
外观尺寸 Appearance And Dimensions	厚度公差 (mm) Thickness Tolerance		宽度公差 (mm) Width Tolerance					表面 Surface	
标准要求 Customer Requirement	±0.01		-0.1					合格 Qualified	
实测值 Actual Value	0.497/0.499		199.94/199.95					合格 Qualified	
备注 Remark	1. 本证书涂改、复印无效。 The altered or copied certificate is invalid. 2. 表内一律为法定计量单位。 The units in this form are all legal unit of measurement. 3. 所提供数据均为测试值，如有质量异议时，请在收货后三个月内提出，要求写明批号。 All the provided values are measured ones. If you have any quality questions, please contact us within three months with Batch number.								
本产品已按上述要求进行制造和检验，其结果符合要求，特此证明。 We hereby certify that material described herein has manufactured and tested with satisfactory results in accordance with requirements of the above material specification.									
Checker (Seal) 检验员签字(盖章) 					 Quality Department (Seal) 质量部 (盖章)				
地址：中国 浙江省 宁波市 鄞州区 滨海工业园区									



PRODUCT SPECIFICATION OF Oupin

Material Signal Pin : I800-C5210

[SGS Test Report Click here](#)

[如需 SGS 測試報告請點選此處](#)

州 金 超 物 资 有 限 公 司
产 品 质 量 检 验 报 告

2020年4月15日

客户名称	昆山欧品			执行标准	JIS H3130		重量	32KG			
牌 号	C5210-H	批 号	Q1912-256	规格状态	0.15*17	厚度公差 (mm)	-0.01	宽度公差 (mm)	-0.1		
化 学 成 分 (%)											
元 素	Sn	P	Zn	Fe	Pb	Ni	Sb	Bi	Si	Al	Cu
标 准	7.0-9.0	0.03-0.35	≤0.20	≤0.1	≤0.02	—	—	—	—	—	余量
实 测	7.16	0.17	0.036	0.006	0.002	0.076	0.0001	0.0001	0.0008	0.0001	余量
物 理 性 能											
项 目	抗 拉 强 度 σ_b (N/mm ²)		延 伸 率 δ (%)		硬 度 值 Hv		弯 曲 实 验 180°				
标 准	590-690		15-30		185-220						
实 测	640		23.3		204						

签发:

检验:
本质保单请妥善保管, 如对我司的产品品质有异议, 特此质保单在一个月內与我司联系, 本公司将竭诚为您服务

技质部联系电话 (TEL): 0575-84559726

