

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET

SPEC.NO.(規範編號) Q9115SPP-629		APPLICABLE PRODUCT (適用產品) 9115-4196CB30PA		PAGE 1/5	REV. B
APPLICABLE CUSTOMER (適用客戶) ALL				PACKAGING CATEGORY (包裝方式) TRAY PLATE PACKING	

REVISION HISTORY (修訂履歷)

ECN NO. REV.	PAGE (頁次)								
	1	2	3	4					
A	New Version 新版發行								
B	Revise the Bar code label 增加條碼標籤								

DIVISION (事業單位)	Product Develop (產品開發課)	APPROVED (核准)	CHECKED (審核)	PREPARED (制表)	tan zhi wu 05/31'11
-----------------	-------------------------	---------------	--------------	---------------	---------------------

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)


SPEC.NO.(規範編號) Q9115SPP-629

CONFIDENTIAL
 TOP SECRET


PAGE 2/5 REV. B

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備注)

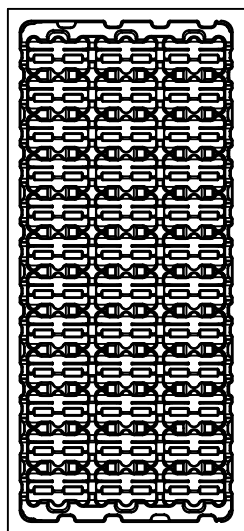

(Drawing 1-1)
(圖1-1)

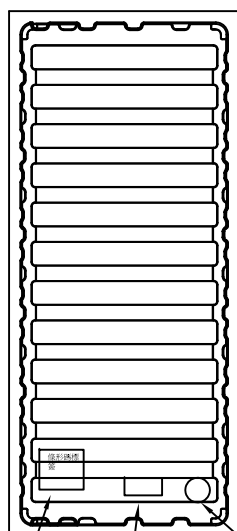


Bar code label
條碼標籤

(Drawing 3)
(圖3)

Batch label
批次標籤

(Drawing 2)
(圖2)

Season label
季節標籤



(Drawing 1-2)
(圖1-2)



(Drawing 3)
(圖3)

一.PVC Plate Packing Mode: (PVC盤包裝方式)

1.Each PVC plate put 48PCS products (whether products put way meet picture 1-2), and add cover 1PCS on each plate, the cover should be booked with the plate together, so as not to cause the products to fall scattered.

每個PVC盤中放48PCS產品(產品擺放方式見圖1-2),并在每個盤子上面加蓋子1PCS,蓋子要與底盤訂在一起,以免造成產品散落。

2.The label of minimum supplies label (the design of the supplies label is such as Fig. 7) and season is stuck separately on each cover, such as Fig. 2.

在每個蓋子的上面分別貼物料標籤(物料標籤的樣式如圖7)與季節標籤,如圖2。

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

■ CONFIDENTIAL □ TOP SECRET

SPEC.NO.(規範編號) Q9115SPP-629

PAGE


3/5

REV.


B

PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)


REMARK (備注)

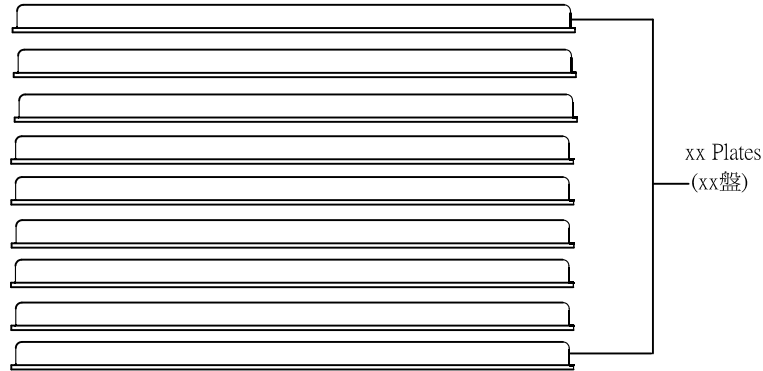

(Drawing 4)
(圖4)

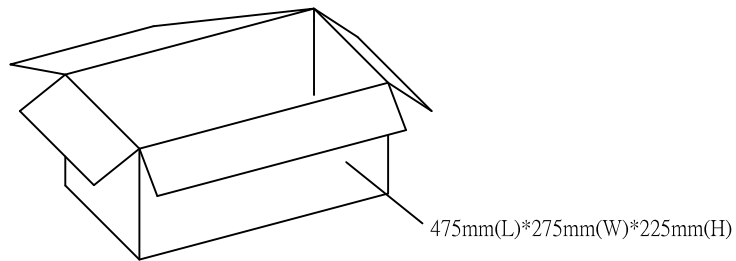

(Drawing 5)
(圖5)



(Drawing 6)
(圖6)

一. Outer Box Packing Mode: (外箱包裝方式)

1. Fetching CT-0.9 1 carton, 10 plates filled with the products are put, direction must unanimous, direction must unanimous, put one foam board in the upper and lower of the paper box, seal the other case upper strata.

取CT-0.9紙箱1個，將裝滿產品的10個盤子放入，方向須一致，每箱上下各放一塊保麗龍，將外箱上層封口。

2. Need to paste supplies label 1PCS like Fig. 8 each carton terminal surface upper right corner, see Fig. 7 in label design of the supplies. When yard is shown in the carton, the supplies label needs to expose; With criticize and paste the position and need unanimity with the code goods supplies label, when the carton terminal surface space is insufficient, can paste the upper right corner to the side of the carton. Need to stick 1PCS of certificate of quality on each carton terminal surface.

每個紙箱端面右上角需粘貼物料標籤1PCS如圖8，物料標籤樣式見圖7。紙箱碼放時，物料標籤需外露；同批同編碼貨物物料標籤粘貼位置需一致，如紙箱端面空間不足時，可粘貼在紙箱側面右上角。在每個紙箱端面需要貼合格証1PCS。

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

<input checked="" type="checkbox"/> CONFIDENTIAL		<input type="checkbox"/> TOP SECRET	
PAGE	4/5	REV.	B

SPEC.NO.(規範編號) Q9115SPP-629


PACKING OPERATION DIAGRAM & INSTRUCTION (包裝作業圖示及說明)

REMARK (備注)


100	編碼(ITEM):	
	描述(DESCRIPTION):	
	廠家型號:(MODEL):	
	數量(QTY):	
	代碼(CODE):	
	合約號(PO NO):	
	批次號(LOT NO):	
	日期(DATE):	
	原產地 (Country of Origin) :	
	備注(NOTES):	

70

Supplies label
物料標籤
(Drawing 7)
(圖7)

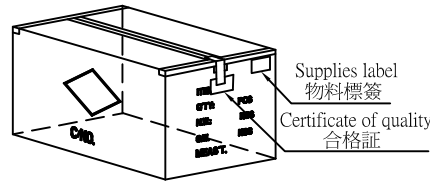

(Drawing 8)
(圖8)

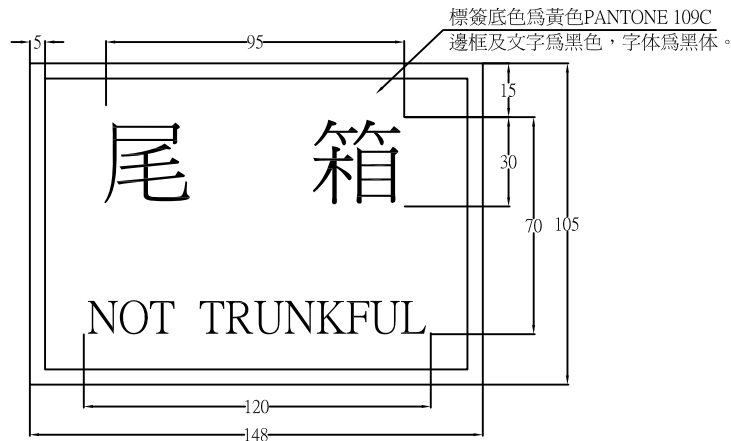

(Drawing 9)
(圖9)

一. Outer Box Packing Mode: (外箱包裝方式)

3. Need to each paste the boot 1 label on two terminal surfaces of carton when the quantity of the supplies is less than all over case and pack the quantity into normally in the carton: First one is stuck below the supplies label, another one is its on the opposite side. The label design of the boot is seen and pursued (9). The bottom of the label is yellow PANTONE 109C, the frame and characters are black, the script is the boldface.

紙箱內物料數量少于滿箱正常裝入數量時，需在紙箱兩端面各粘貼尾箱標籤1個：其一個貼于物料標籤下方，另一個在其對面。尾箱標籤樣式見圖(9)。標籤底色為黃色PANTONE 109C，邊框及文字為黑色，字體為黑體。

The form on the right and flank side of the box must be filled correctly and clearly, take actual testing weight as the standard of each box gross weight, Error value should be in 3% Less than .

外箱之正麥和側麥所要填寫之項目要填寫正確，清晰，每箱之毛重應以實測重量為準，誤差值要在3%以內。

歐品電子(昆山)有限公司

OUPIIN ELECTRONIC(KUNSHAN) CO.,LTD.

PACKAGING SPECIFICATION (包裝作業規範)

CONFIDENTIAL TOP SECRET

PAGE:

5/5

REV.

B

SPEC. NO. (規範編號)		Q9115SPP-629									
PACKING MATERIAL (包裝材料)			PRODUCT P/N	CT NO.	PACKING N.W.	PACKING QUANTITY (包裝數量)			WEIGHT (重量) kg		
MATERIAL NAME (材料名稱)	PART NUMBER (料號)	Q' TY	(產品料號)	(紙箱規格)	(包材重量)	PCS/TRAY	TRAY/BOX	PCS/BOX	N.W. /PCS	N.W. /BOX	G.W. /BOX
PAPER BOXES (紙箱)	CT-0.9	1	9115-4196CB30PA	CT-0.9	3.97	30	10	300	0.0135	4.05	8.02
Packing Box (包裝盒)	PVC-9115-001										
Packing Box Cover (包裝盒蓋子)	PVC-9115-002										
Foam (保麗龍)	-----										

1. NOTE:
 (注意)
 When the finished products have been made, take the actual weight as the standard of gross weight in each box.
 (成品出貨時, 每箱之毛重應以實測重量為準)
 When the finished products have been made, stick the proper designation list on the box according to product de