

REV.	SPECIFICATION	ECN NO.	APPD.
R6		ECN130734	






Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy


Electrical Characteristics:

Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

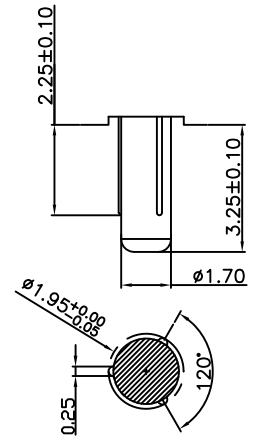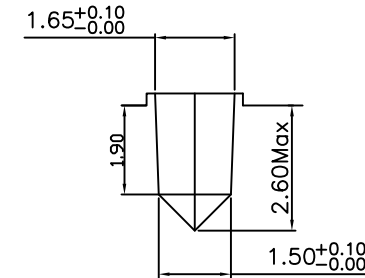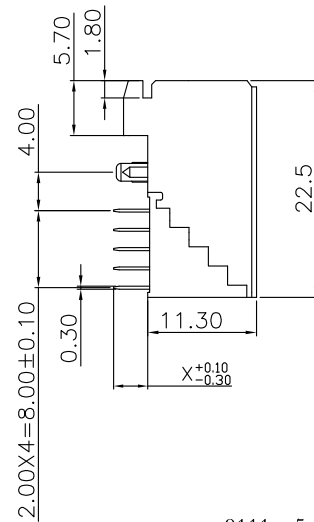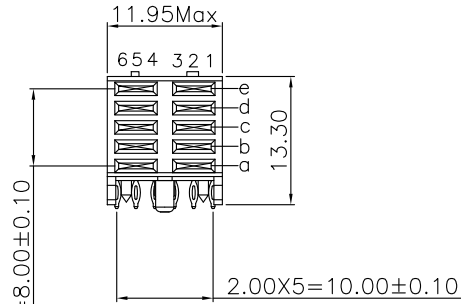

DETAIL: J
(Scale 4:1)

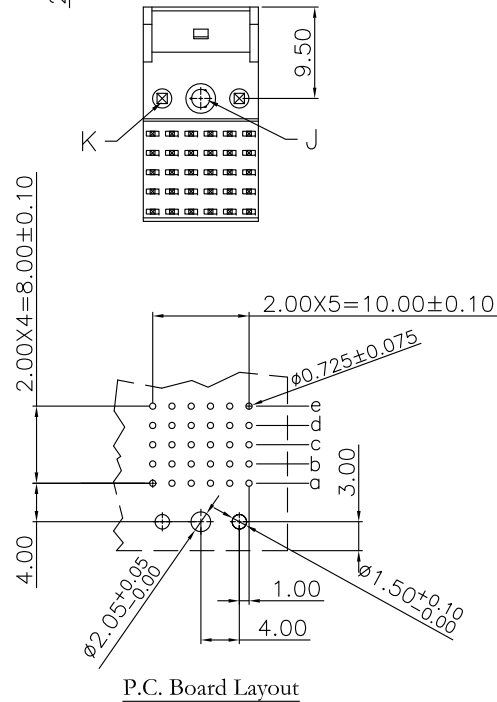

Series: 9111- 5 4 10 x C xx P U
 5: 5Rows
 4: Female
 Position
 1: Dip Length
 2: Dip Length
 U: Tube Package
 P: Press Fit Type
 10: 10 μ"
 30: 30 μ"
 C: Selective Gold Plated

X Length	1	2
	2.90mm	3.53mm

Tolerances	Dwg.No.	9111D54002	Title:
x = ±0.5	Projection		9111 Series
.x = ±0.25	Unit	mm	H.D. 2.0mm(0.079")
.xx = ±0.15	Scale	1:1	Futurebus(+) 5 Rows
	Drawn By	ZW 07/16'13	Female Power Type

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9111-5410xCxxPU			
SHEET	1/1	Ver.No.	R6