

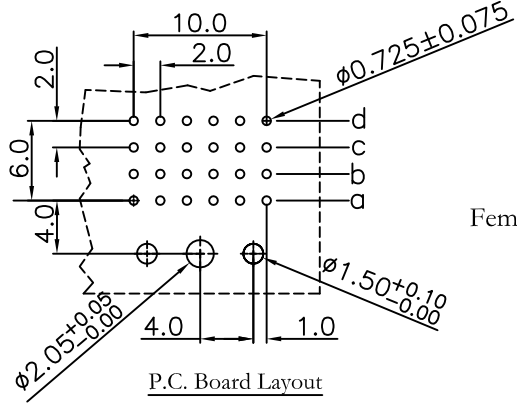
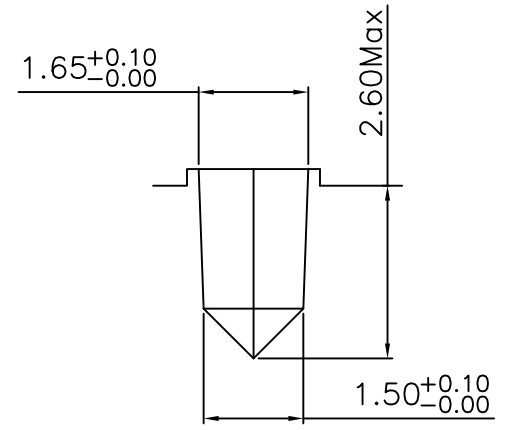

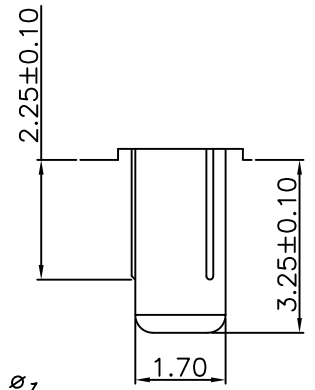
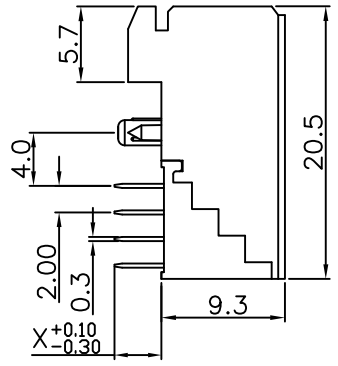



REV.	SPECIFICATION	ECN NO.	APPD.
R5		ECN150546	

Material:
Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy
Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -65°C~+125°C .
*RoHS Compliant



9111- 4 4 08 x C xx P U
Series
4: 4Rows
Female Power
Position
1: Dip Length
2: Dip Length
C: Dip Tin Plated
Contact Gold Plated
G: Gold Plated
xx: 10 μ"
30: 30 μ"
P: Press Fit Type
U: Tube Package



X	1	2
Length	2.90mm	3.53mm

Tolerances	Dwg. No.	9111D44001	Title:	9111 Series		
x = ±0.5	Projection		H.D. 2.0mm(0.079") Futurebus(+) 4 Rows Female Power Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-4408xCxxPU		
.x = ±0.25	Unit	mm			Scale	1:1
.xx = ±0.15	Drawn By	CXP 05/29'15			SHEET	1/1