

REV.	SPECIFICATION	ECN NO.	APPD.
R6		ECN210840	








Material:

Housing: High Temperature Plastic UL94V-0.
 Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 1 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 30mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +125°C .

***RoHS Compliant**

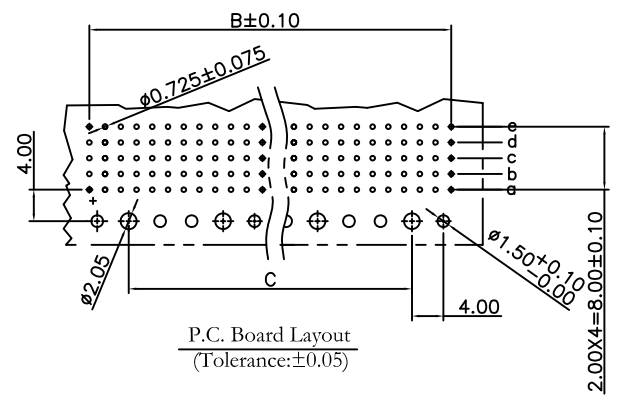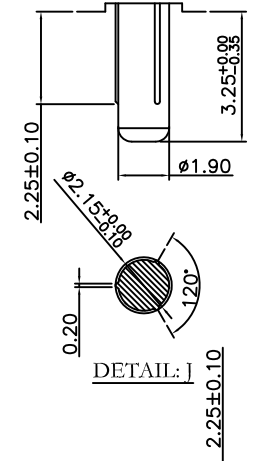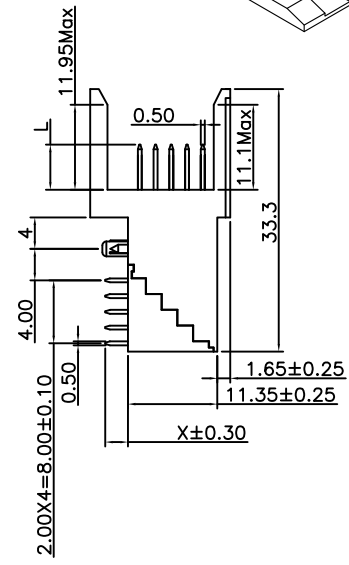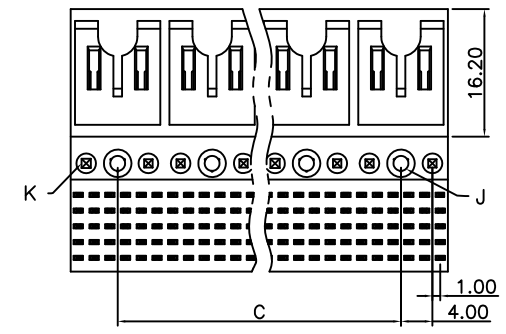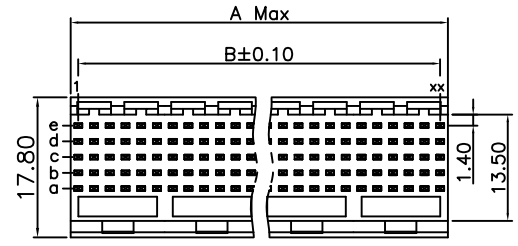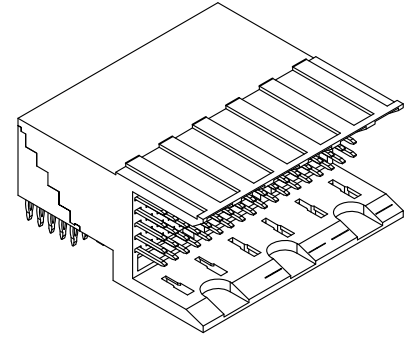

9111- 5 5 xx x x C xx P U
 Series 5: 5Rows 5: Male Signal Position A: A ~ H Contact Length
 U: Tube Package
 P: Press Fit Type
 10: 10 μ"
 30: 30 μ"
 C: Dip Tin
 Contact Gold
 G: Gold Plated
 1: Dip Length
 2: Dip Length

Contact Length (L)	A	5.00	
	B	5.75	
	E	6.50	
	F	7.25	
	H	8.00	
Dip Length (X)	1	2	
	2.90	3.53	
Position (n)	Dimension		
	A	B	C
30	11.95	10	
60	23.95	22	12
90	35.95	34	24
120	47.95	46	36
150	59.95	58	48
180	71.95	70	60
210	83.95	82	72
240	95.95	94	84

Tolerances	Dwg. No.	9111D55001	Title:	9111 Series H.D.2.0mm(0.079") Futurebus(+)5 Rows Male Right Angle Type	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9111-55xxxxC(G)xxPU SHEET 1/1 Ver.No. R6
x = ±0.5	Projection				
.x = ±0.25	Unit	mm	Scale	1:1	
.xx = ±0.15	Drawn By	ZY 08/28'21			