


REV.	SPECIFICATION	ECN NO.	APPD.
R3		ECN180616	

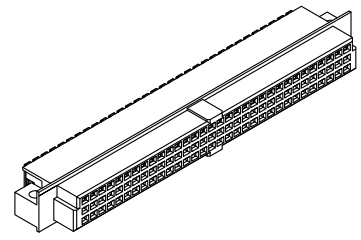

Material and plating:

Housing: PBT, Beige ,UL94V-0.

Contacts: Phosphor Bronze.

Gold Plated on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50u" Min .

Electrical Characteristics:

Current Rating: 2 AMP.






Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩmin. at DC 500V.

Contact Resistance: 20mΩmax. at DC 100mA.

Operating Temperature: -55°C ~+125°C.

***RoHS Compliant**

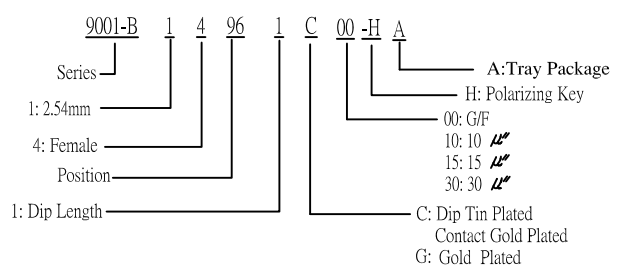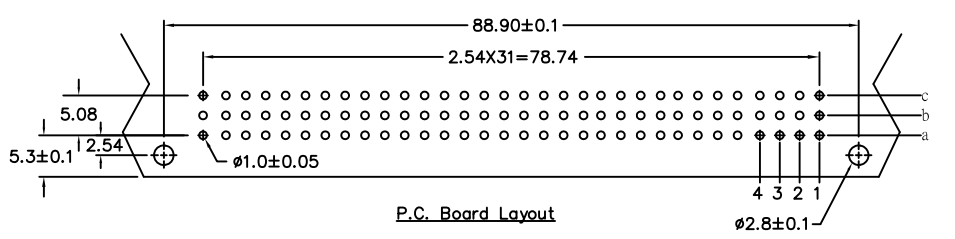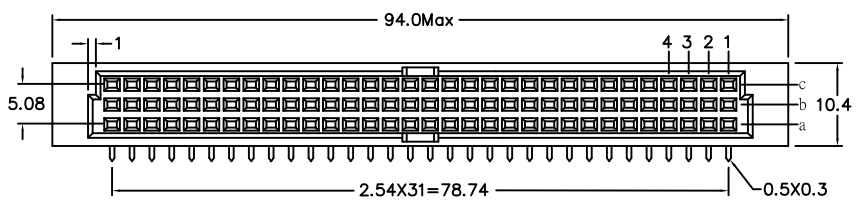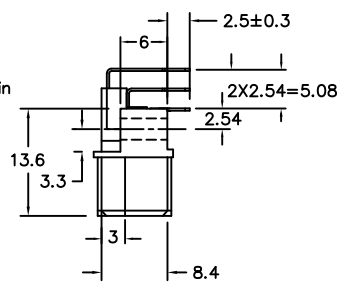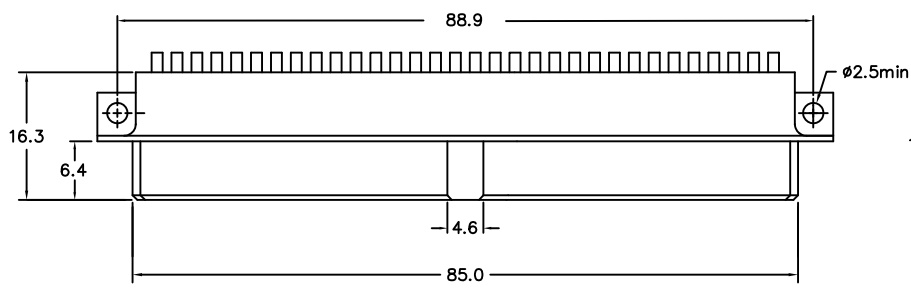

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a-c	

Tolerances	Dwg. No.	9001D14014
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	ZJ 06/05'18

Title:
9001-B Series
DIN41612 R Type Female

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 9001-B14xx1Cxx-HA

SHEET	1/1	Ver.No.	R3
--------------	-----	----------------	----