
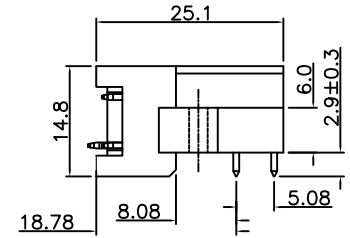
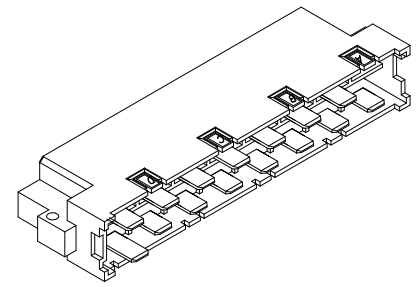


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN140535	

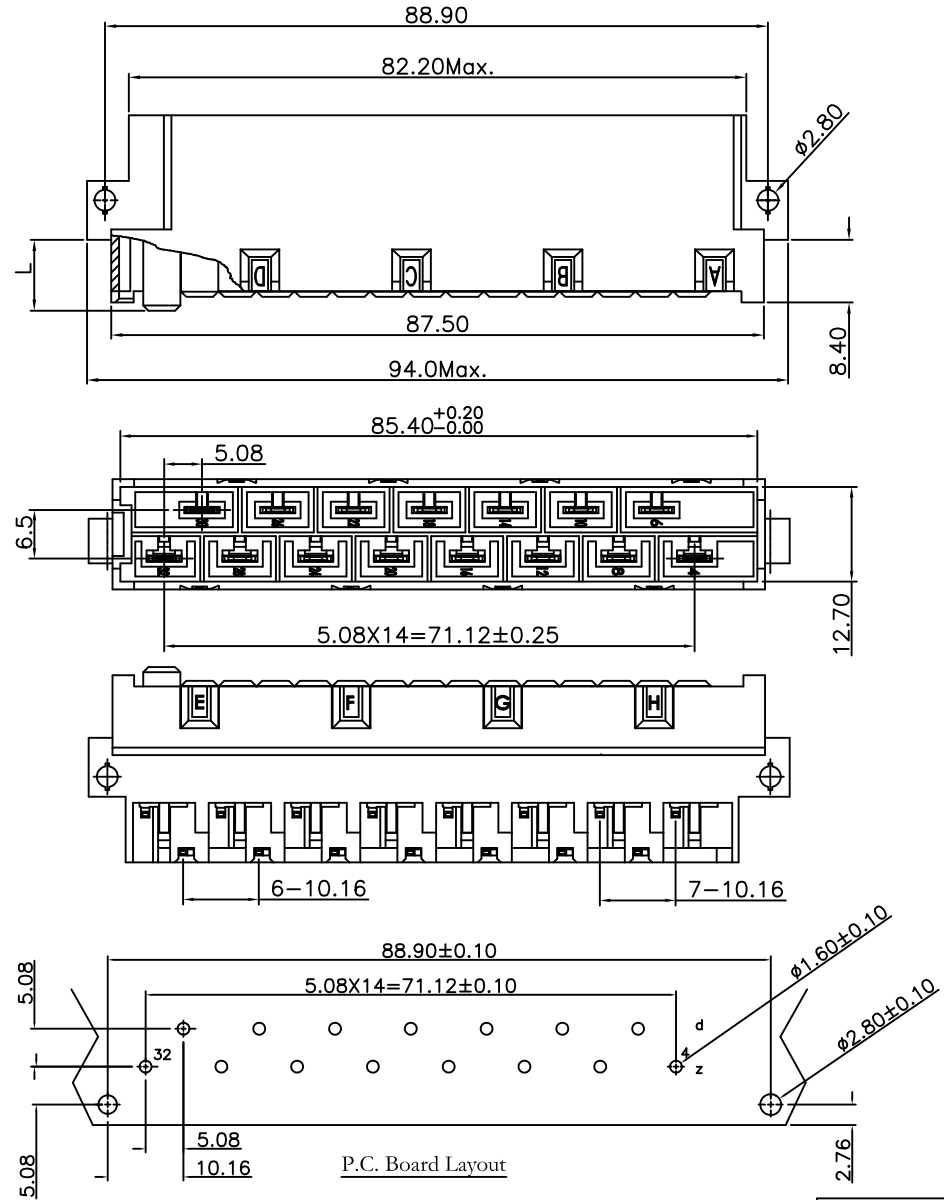

**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy.

**Electrical Characteristics:**

Current Rating: 15 AMP.  
 Dielectric Withstanding Voltage: AC 3100V For 1 minute.  
 Insulator Resistance: 1000MΩ min. at DC 500V.  
 Contact Resistance: 8mΩ max. at DC 100mA.  
 Operating Temperature: -55°C ~+125°C .

**\*RoHS Compliant**

9001- 51 15 4 x A  
 Series: 9001-  
 1: Male  
 Position: 51  
 15  
 4: Z32 Premating 3.5mm  
 Other Pins Premating 1.65mm  
 A: Tray Package  
 A: AG/NI Plating  
 T: TIN/NI Plating

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28	7.65
z32	9.50
d6,d10,d14,d18,d22,d26,d30	7.65

Tolerances	DwgNo.	9001D51003
x = ±0.5	Projection	$\oplus$ $\nabla$
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	LX 06/17'14

Title: 9001 Series  
 DIN41612 H15 Type Male

**OUPIN**  
 OUPIN ELECTRONIC(KUNSHAN) CO., LTD.  
 P/N: 9001-51154xA  
 SHEET 1/1 Ver.No. R4