
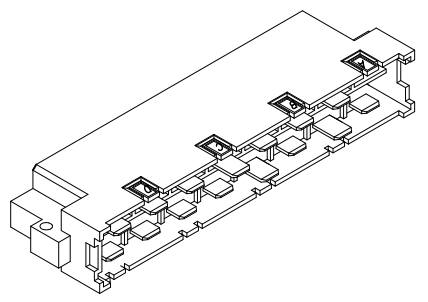






REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN140535	

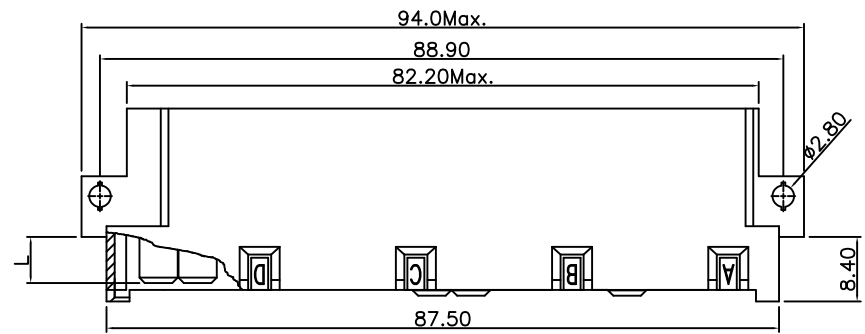

Material:
Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:
Current Rating: 15 AMP.
Dielectric Withstanding Voltage: AC 3100V For 1 minute.
Insulator Resistance: 1000M Ω min. at DC 500V.
Contact Resistance: 8m Ω max. at DC 100mA.
Operating Temperature: -55 $^{\circ}$ C ~+125 $^{\circ}$ C .

***RoHS Compliant**

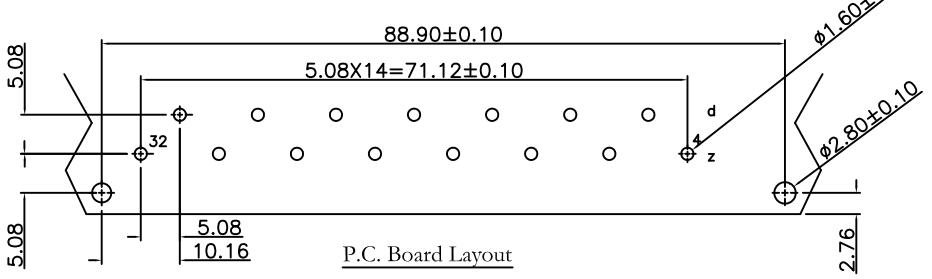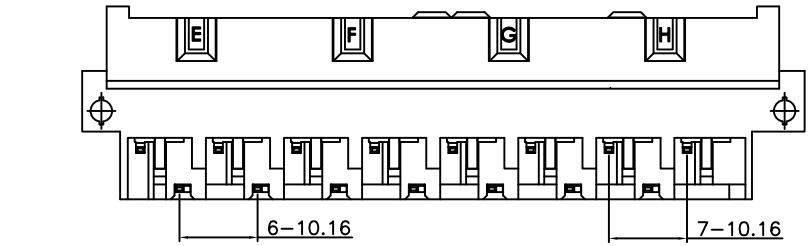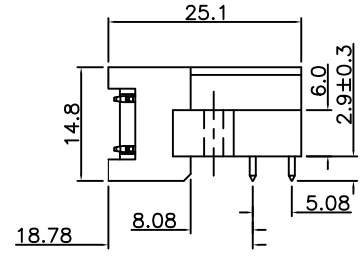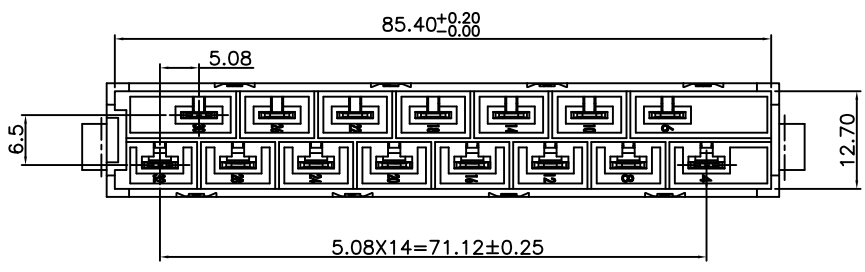

9001- 51 15 3 x A

Series — 9001-
 1: Male — 51
 Position — 15
 3: Z8,Z16,D18 Premating 1.65mm
 x A: Tray Package
 A: AG/Ni Plating
 T: TIN/Ni Plating

CONTACT NO.	L
z4,z12,z20,z24,z28,z32	6.00
z8,z16	7.65
d6,d10,d14,d22,d26,d30	6.00
d18	7.65

Tolerances	Dwg No.	9001D51002
x = ± 0.5	Projection	
.x = ± 0.25	Unit	mm
.xx = ± 0.15	Scale	1:1
	Drawn By	LX 06/17'14

Title:
 9001 Series
 DIN41612 H15 Type Male

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 9001-51153xA

SHEET	1/1	Ver.No.	R4
--------------	-----	----------------	----