

REV.	SPECIFICATION	ECN NO.	APPD.
A1		12/07'06	







Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.
Dielectric Withstanding Voltage: AC 1000V For 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100mA.
Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

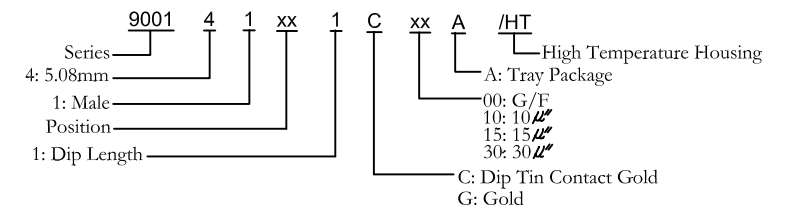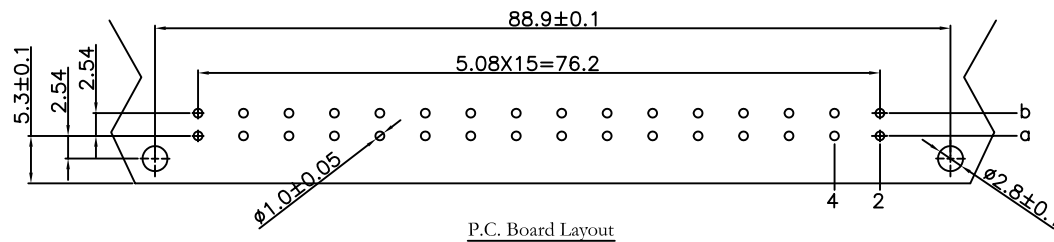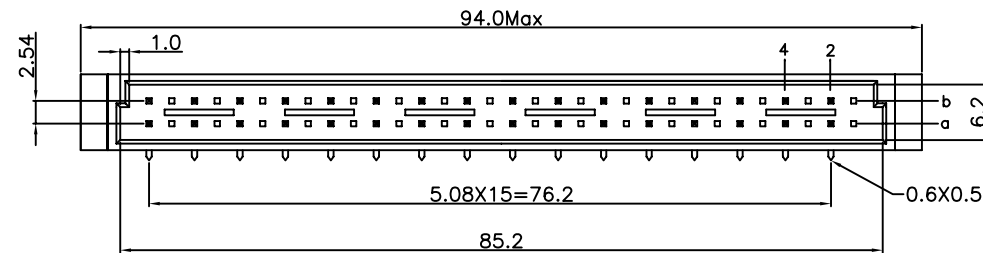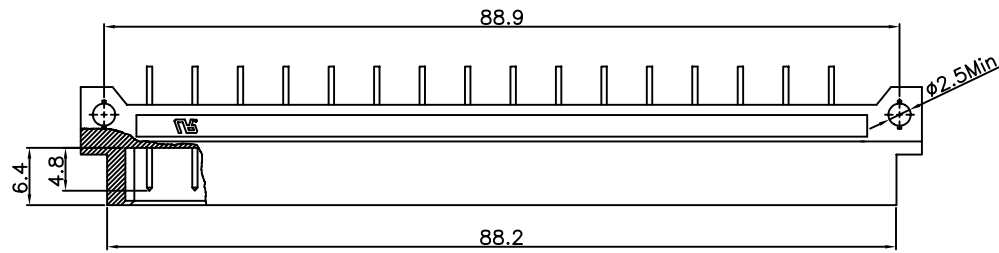

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	32	a b	4 3 2 1
	16	a -	4 3 2 1

Tolerances	Drawn No.	9001D41003		Title:	9001 Series DIN41612 Half B Type Male	
x = ±0.5	Projection			Scale	1:1	
.x = ±0.25	Unit	mm			Drawn By	Lixiaojun
.xx = ±0.15						

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-41xx1CxxA/HT			
SHEET	1/1	Ver.No.	A1