
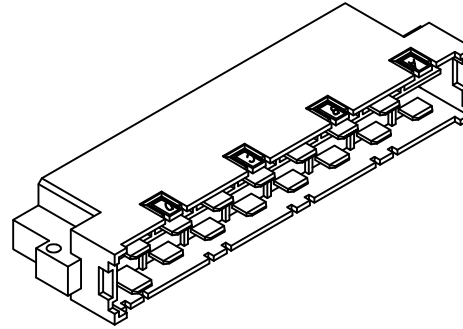


REV.	SPECIFICATION	ECN NO.	APPD.
R4		ECN190126	

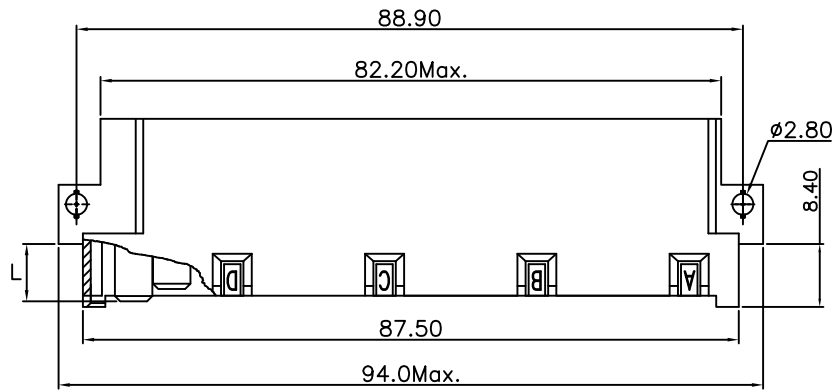

Material and Plating:

Housing: PBT,UL94V-0,Beige .

Contacts: Brass.

100u" Min Ag or 80u" Min Tin Plated over Nickel

50u" Min.

Electrical Characteristics:

Current Rating: 15 AMP.





Dielectric Withstanding Voltage: AC 3100V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 8m Ω max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

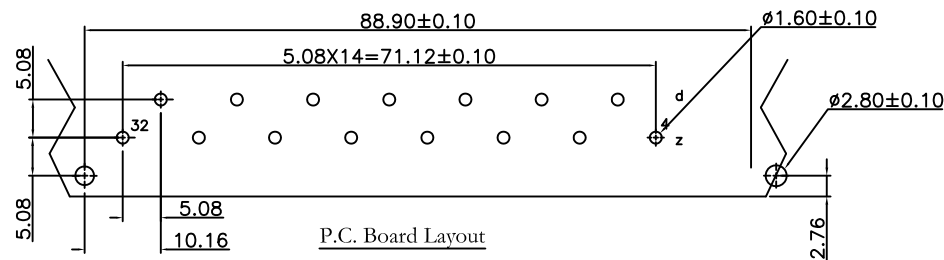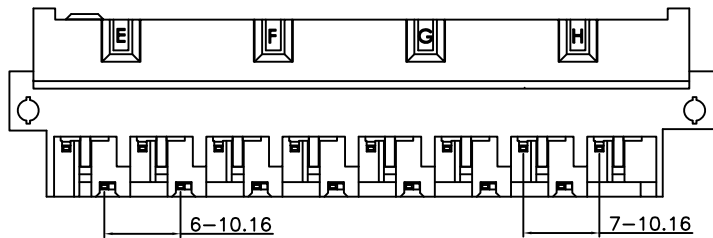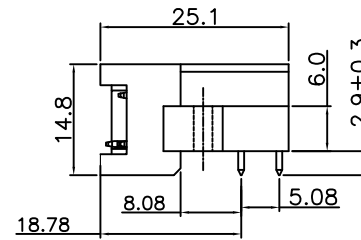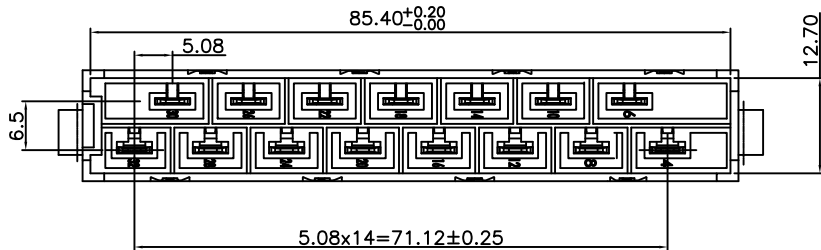

9001- 51 15 1 x A
 Series ——— 51 ——— 15 ——— 1 ——— x ——— A
 1: Male ———
 Position ———
 A: Tray Package
 A: Ag/Ni Plating
 T: Tin/Ni Plating
 1: Z32 Premating 1.65mm

CONTACT NO.	L
z4,z8,z12,z16,z20,z24,z28	6.00
z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

Tolerances	Dwg No.	9001D51001	Title:		9001 Series DIN41612 H15 Type Male	 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 9001-51151xA
x = ± 0.5	Projection					
.x = ± 0.25	Unit	mm	Scale	1:1		
.xx = ± 0.15	Drawn By	XFF 01/11'19				
			SHEET	1/1	Ver.No.	R4