

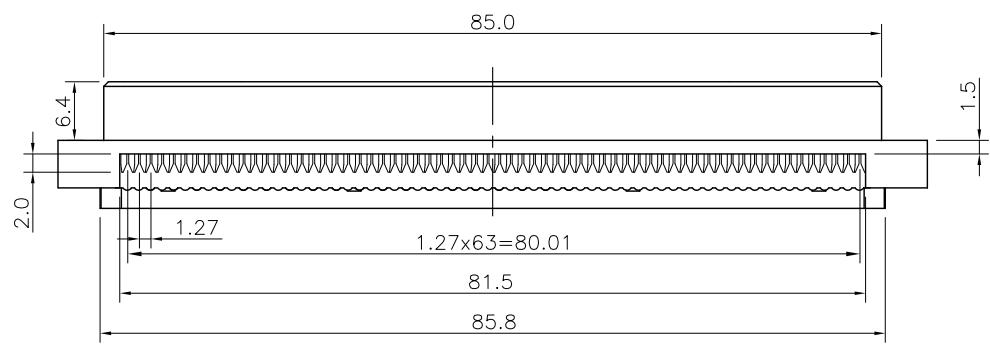



REV.	SPECIFICATION	ECN NO.	APPD.
R6		ECN200837	

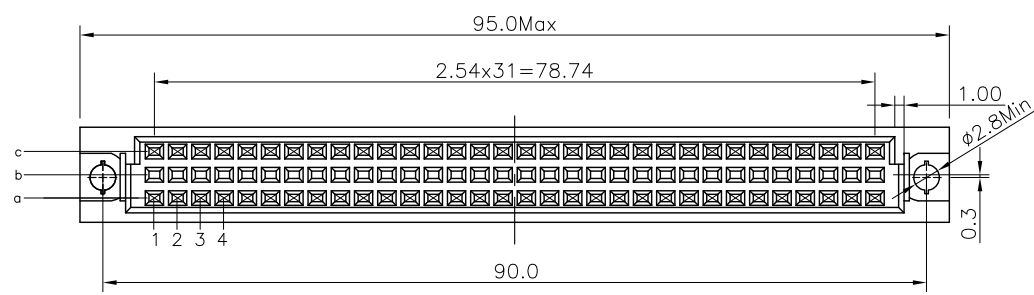

Material and Plating:

Housing: PBT,UL94V-0,Beige.
 Contacts: Copper Alloy.
 Cover: PBT,UL94V-0,Beige.
 Gold Plated on contact Area and Wire Cutting Area over Nickel 50u" Min.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 1000M min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

9001- 1 2 64 IDC xx A
 Series
 1: 3Row Insulators For 1.27 Cable
 2:Female
 Position
 A: Tray Package
 00: G/F
 10:10u"
 15:15u"
 30:30u"

Tolerances	Dwg. No.	9001D12002
x = ±0.50	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	WQ 08/18'20

Title:
 9001 Series
 DIN41612 IDC Type
 3 Rows Female

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 9001-1264IDCxxA			
SHEET	1/1	Ver.No.	R6