
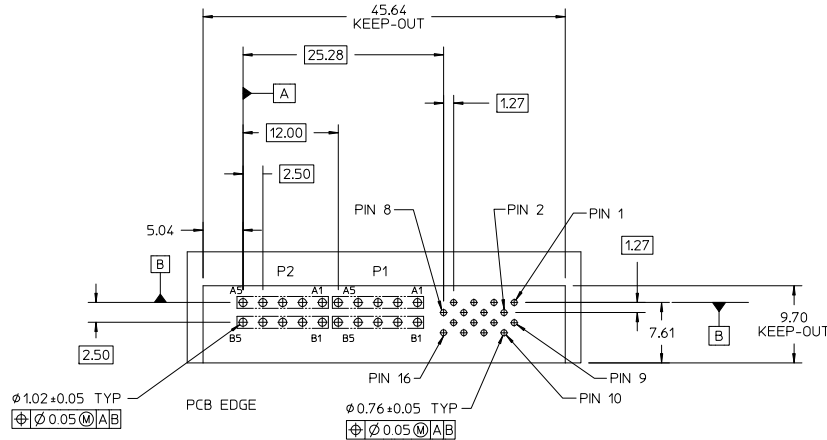

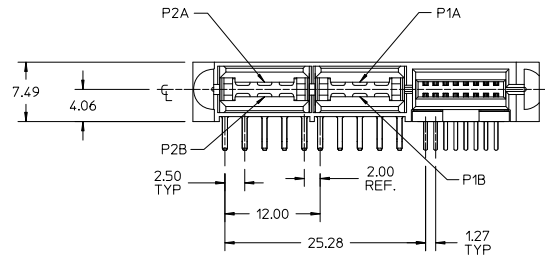


REV.	SPECIFICATION	ECN NO.	APPD.
X3			

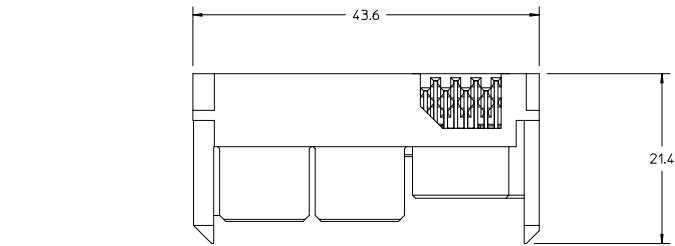

P.C. Board Layout
(Tolerance:±0.05)

- Series — 9392-
- 4:Female Right Angle
- S:With Slot
- Blank:W/O Slot
- P04:Power Contact
- S16:Signal Pin
- N: W/O Post
- P:With Post
- 1: None Lead Trough
- 2: With Lead Trough
- 3: With Left Lead Trough
- 4: Cxx
- D
- A
- A:Tray Package
- D:Dip Type
- CB30: Dip Tin Plated
- Contact Au+Pd/Ni Plated
- 30: 30 u"
- C:Selective Gold Plated
- 10: 10 u"
- 30: 30 u"
- 1: Dim T=2.50mm
- 2: Dim T=2.90mm
- 3: Dim T=3.60mm
- 4: Dim T=4.50mm
- 5: Dim T=3.90mm

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: Signal Pin 1.0 AMP.

Power Pin 30 AMP.

Insulator Resistance: 1500MΩ min. at DC 500V.

Dielectric Withstanding Voltage:

Signal Pin DC 1500V For 1 minute.

Power Pin DC 1500V For 1 minute.

Contact Resistance: Signal Pin 20mΩ max. at DC 20mA.

Power Pin 5mΩ max. at DC 20mA.

Operating Temperature: -40°C ~+105°C .


*RoHS Compliant

TYPE NO.	1	2	3	4	5
DIM T	2.50	2.90	3.60	4.50	3.90



Tolerances	Dwg. No.	9392-D0000-015		Title:	
x = ±0.5	Projection			9392 Series Low Profile Hybrid Power Receptacle	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	wq	8/12'19		

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N:9392-4SP04S16Nx4CB30DA			
SHEET	1/2	Ver. No.	X3

REV.	SPECIFICATION	ECN NO.	APPD.
X3			

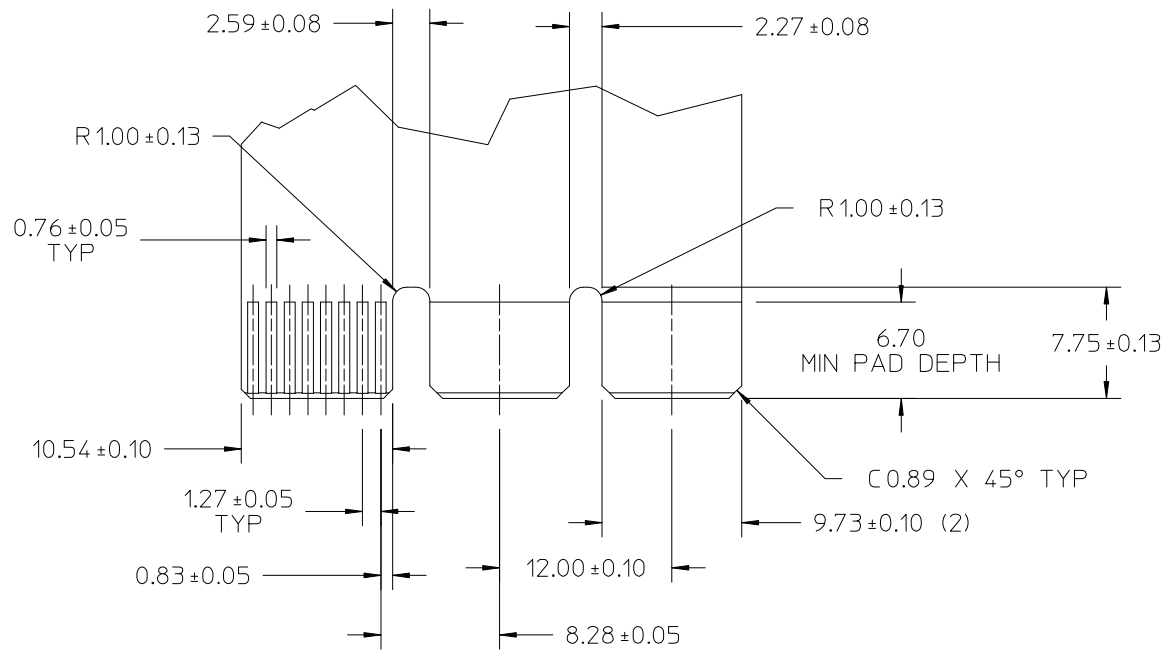

RECOMMENDED CARD EDGE LAYOUT
THICKNESS: 1.57 ± 0.15

Tolerances x = ±0.5 .x = ±0.25 .xx = ±0.15	Dwg. No.	9392-D0000-015		Title: 9392 Series Low Profile Hybrid Power Receptacle	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N:9392-4SP04S16N×4CB30DA				
	Projection								
	Unit	mm	Scale		1:1	SHEET	2/2	Ver. No.	X3
	Drawn By	wq	8/12'19						