

REV.	SPECIFICATION	ECN NO.	APPD.





Material:

Housing: PA6T, UL94V-0, Black.
 Contacts: Brass, Gold Plated or 80~120u" Tin Plated over Nickel 50u" , or Gold Plated on Contact Area and 80~120u" Tin Plated on solder tail over Nickel 50u".

Electrical Characteristics:

Current Rating: 3 AMP.
 Dielectric Withstanding Voltage: AC 500V.
 Insulator Resistance: 1000MΩ min.
 Contact Resistance: 20mΩ max.
 Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

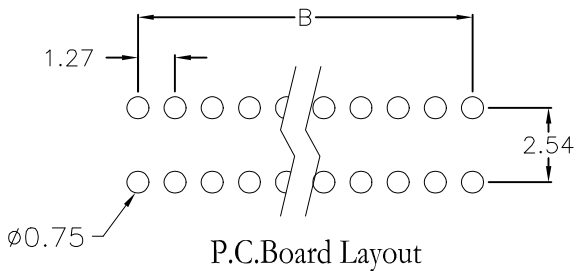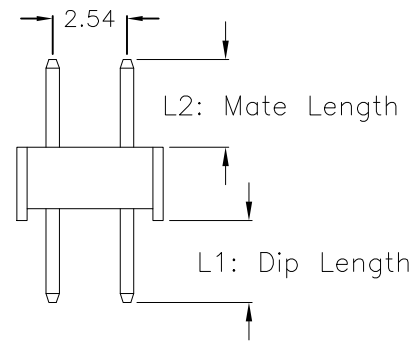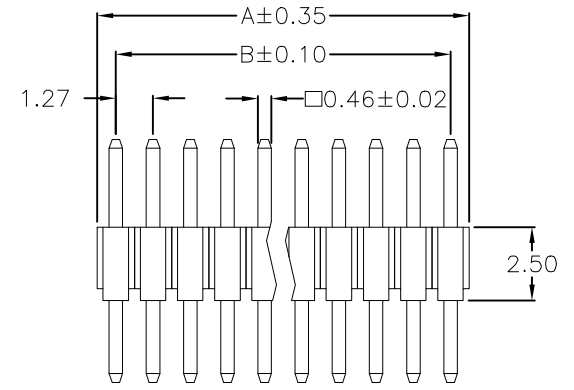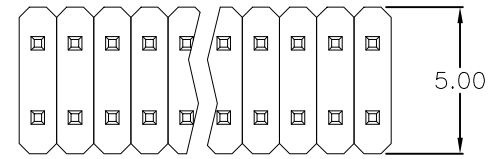

Series: 2212- 2 X xx G 00 S -L1 -L2 B
 Double Row
 No. of Pin per Row: xx
 G: Gold Plated
 T: Tin Plated
 C: Selective Gold Plated
 S: Straight
 00: Gold Flash
 10: 10u"
 15: 15u"
 30: 30u"
 Blank: For Tin Plated
 B: Bulk Package
 U: Tube Package
 L2: Mate Length
 L1: Dip Length

Positions	Dimension					
	A	B	Positions	A	B	
2X02	2.34	1.27	2X27	34.09	33.02	
2X03	3.61	2.54	2X28	35.36	34.29	
2X04	4.88	3.81	2X29	36.63	35.56	
2X05	6.15	5.08	2X30	37.90	36.83	
2X06	7.42	6.35	2X31	39.17	38.10	
2X07	8.69	7.62	2X32	40.44	39.37	
2X08	9.96	8.89	2X33	41.71	40.64	
2X09	11.23	10.16	2X34	42.98	41.91	
2X10	12.50	11.43	2X35	44.25	43.18	
2X11	13.77	12.70	2X36	45.52	44.45	
2X12	15.04	13.97	2X37	46.79	45.72	
2X13	16.31	15.24	2X38	48.06	46.99	
2X14	17.58	16.51	2X39	49.33	48.26	
2X15	18.85	17.78	2X40	50.60	49.53	
2X16	20.12	19.05	2X41	51.87	50.80	
2X17	21.39	20.32	2X42	53.14	52.07	
2X18	22.66	21.59	2X43	54.41	53.34	
2X19	23.93	22.86	2X44	55.68	54.61	
2X20	25.20	24.13	2X45	56.95	55.88	
2X21	26.47	25.40	2X46	58.22	57.15	
2X22	27.74	26.67	2X47	59.49	58.42	
2X23	29.01	27.94	2X48	60.76	59.69	
2X24	30.28	29.21	2X49	62.03	60.96	
2X25	31.55	30.48	2X50	63.50	62.23	
2X26	32.82	31.75				

ie: 2212-2XxxG00S-2.6-2.8B
 2.6mm Dip Length (increment of 0.1mm)
 2.8mm Mate Length (increment of 0.1mm)

Tolerances	Dwg. No.	2212D01002	Title:	2212 Series
.x = ±0.30 .xx = ±0.20	Projection		Pin Header 1.27mmX2.54mm	
	Unit	mm	Double Row	
	Scale	1:N	Straight Solder Type	
Drawn By	Martin 06/20'23		① 535	

OUPIIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 2212-2XxxG00S-L1-L2B
 SHEET 1/1 Ver.No. B2