
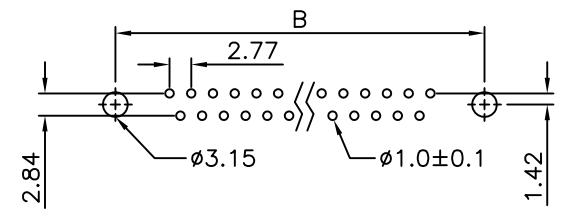
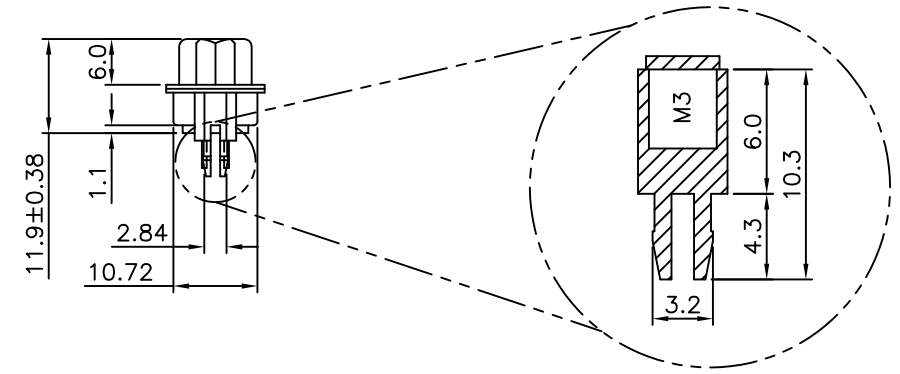
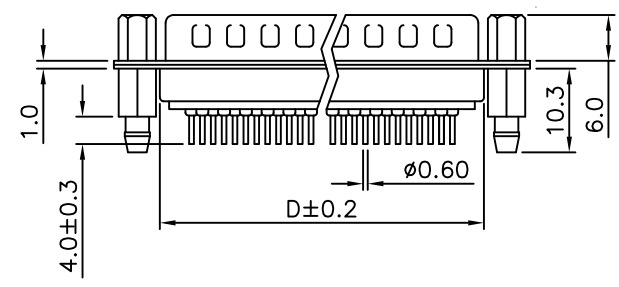


REV.	SPECIFICATION	ECN NO.	APPD.

A
B
C
D
E
F
G
H

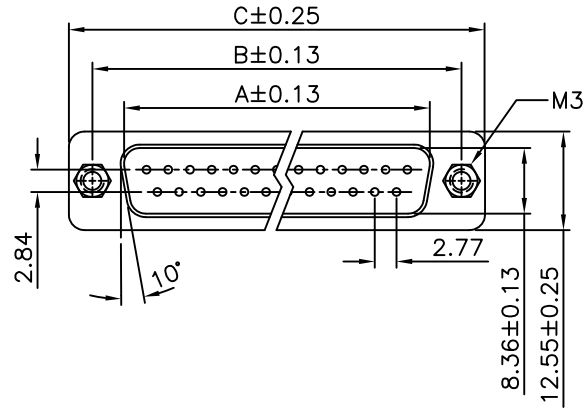

P.C. Board Layout

7905- xx M T B G 00 N3N6 A -6MM -M3

Series ———
Position ———
M: Male
B: Black
U: Blue
W: White
G: Gold Plated

00: G/F

M3: M3 Threaded Hole
6MM: Height of Jack Screw
A: Tray Package
N3N6: With Threaded Riveted Brackets and Jack Screws Assembled

Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated over Nickel 30 u" Min.
Shell: Steel.

Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulator Resistance: 1000MΩ min, at DC 500V.
Contact Resistance: 20mΩ max, at DC 100mA.
Operating Temperature: -55°C~+105°C.
***RoHS Compliant**

Tolerances	Dwg. No.	7905D01011	Title:	
x = ±0.50	Projection		7905 Series	
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	jia-chi 01/02'18	D-SUB Straight Type	
			① 767	

Position	Dimension			
	A	B	C	D
9	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.51
25	38.96	47.04	53.04	41.30
37	55.42	63.50	69.32	57.71

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 7905-xxMTBG00N3N6A-6MM-M3

SHEET	1/1	Ver.No.	A9
--------------	-----	----------------	----