

REV.	SPECIFICATION	ECN NO.	APPD.

Male

Female








Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.
Plating: Gold Plated.
Board Lock: Copper Alloy.
Shell: Metal.



Electrical Characteristics:

Current Rating: 3 AMP.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+105°C.

***RoHS Compliant**

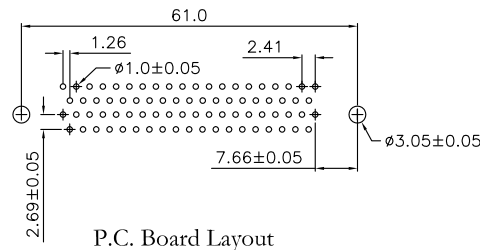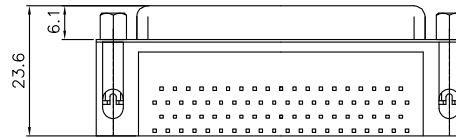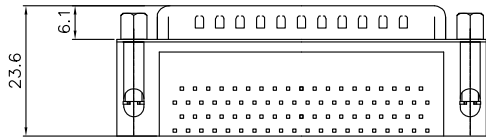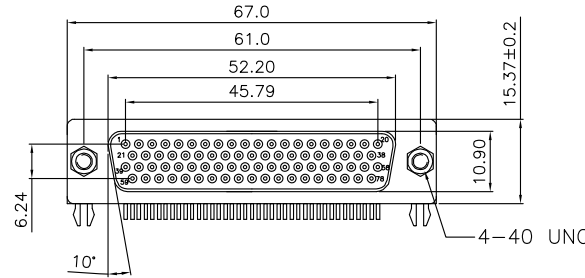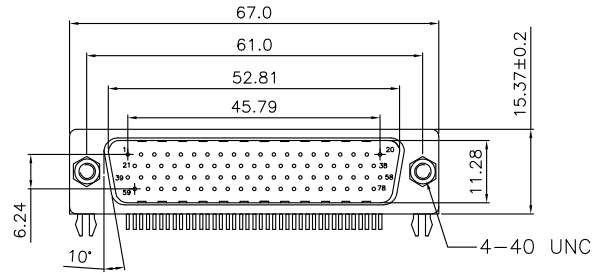

7916-A **78** **x** **A**
 Series Position M:Male A: With Grounding Forks and A: Tray Package
 F:Female with Jack Screw Attached.

Tolerances	Dwg. No.	7916D03008		Title:		 OUPIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 7916-A78MAA&7916-A78FAA	
x = ±0.5	Projection			7916 Series			
.x = ±0.25	Unit	mm	Scale	1:1	H.D D-SUB		SHEET
.xx = ±0.15	Drawn By	ZJJ	04/26'12	①747	Right Angle Type		1/1
							Ver.No.
							A1