
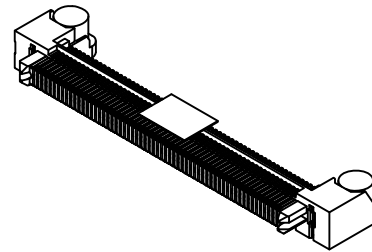


REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN241120	

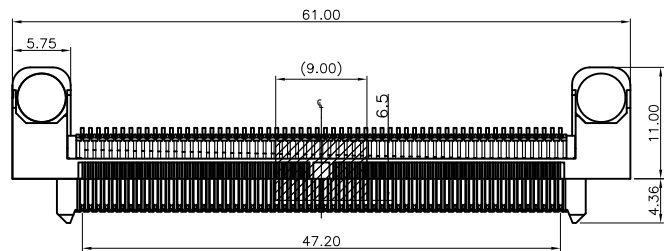





Material and Plating:

Housing: LCP, UL94V-0, Black.
 Contacts: Phosphor Bronze
 Gold Plated on Contact Area and 80u" Min Tin Plated on Solder Tail over Nickel 50 u" Min.
 Counterweight: Brass
 Latches: Brass


Electrical Characteristics:

Current Rating: 1.4 AMP.
 Dielectric Withstanding Voltage: AC 900V.
 Insulation Resistance: 50000MΩ min.
 Contact Resistance: 25mΩ max.
 Operating Temperature: -55°C~+125°C.

***RoHS Compliant**



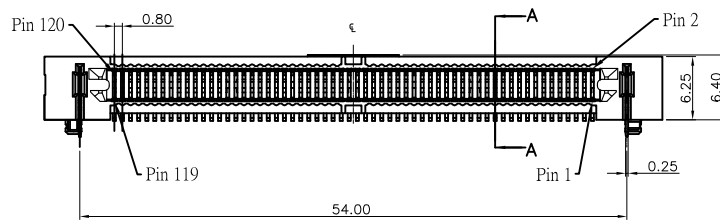


Type lock




Type1 lock

Section A-A

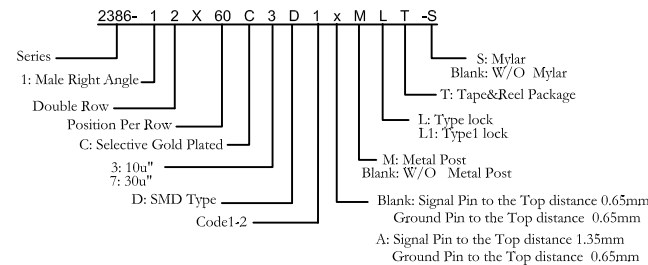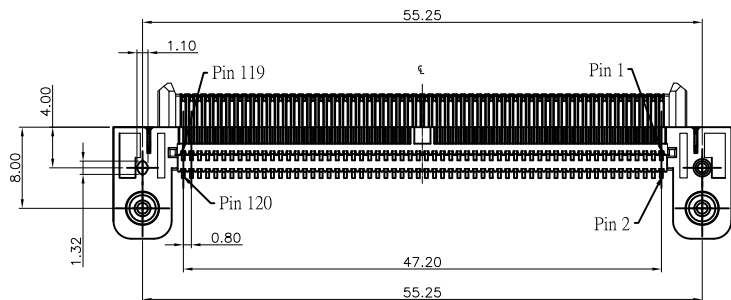

Detail B
Scale 5:1




Detail C
Scale 5:1

PCB Thickness	Code	Lock	Metal Post
Dimension		D	E
1.58	1	1.68	1.40
2.36	2	2.46	2.19




Tolerances	Dwg No.	2386-D0000-028	Title:
x. = ±0.50	Projection		2386 Series
.x = ±0.25	Unit	mm	Male Right Angle
.xx = ±0.15	Scale	1:1	
	Drawn By	WP 11/27'24	

OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2386-12X60C3D1xMLT-S			
SHEET	1/2	Ver.No.	R2

REV.	SPECIFICATION	ECN NO.	APPD.
R2		ECN241120	

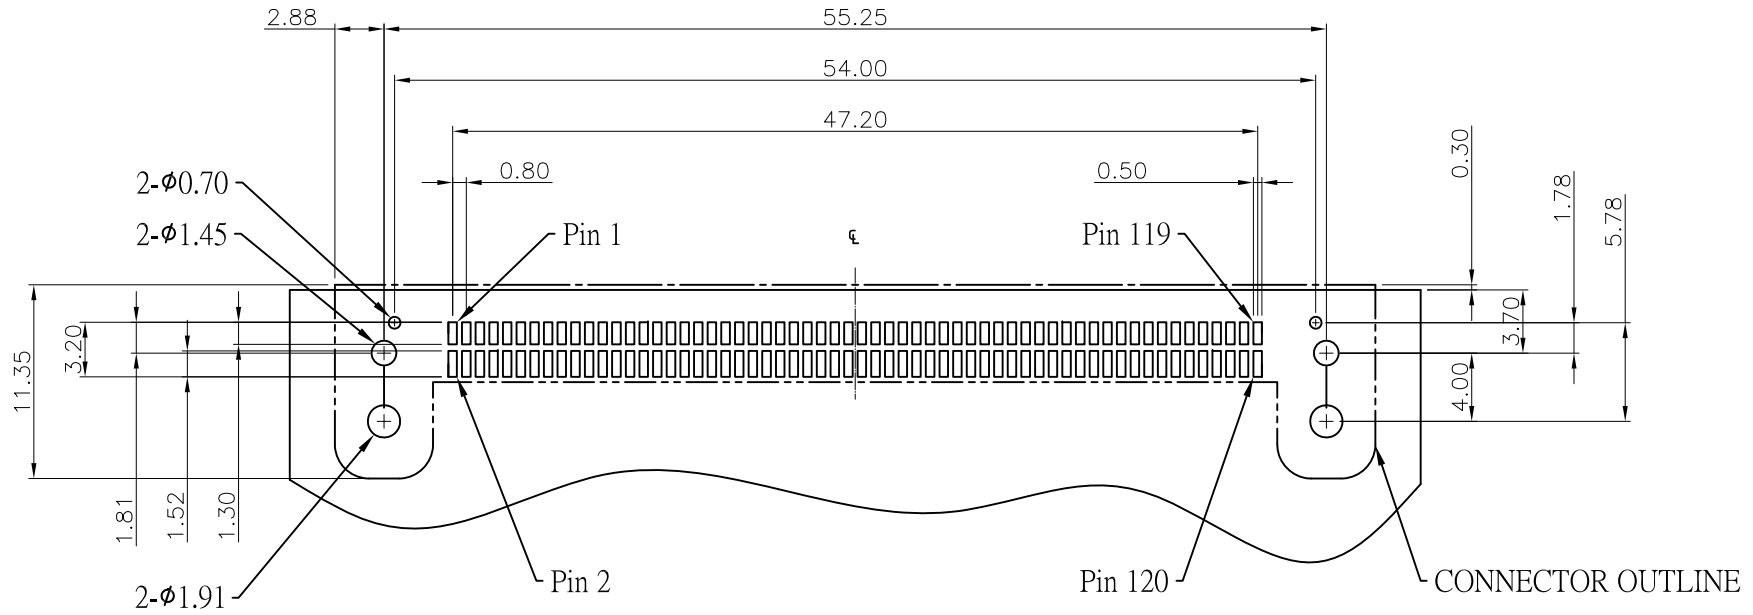

Recommended PCB Layout
(Tolerance: ±0.05)

Tolerances x. = ±0.50 .x = ±0.25 .xx = ±0.15	Dwg No.	2386-D0000-028		Title: 2386 Series Male Right Angle	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD. P/N: 2386-12X60C3D1xMLT-S	
	Projection					
	Unit	mm	Scale			1:1
	Drawn By	WP 11/27'24				
SHEET		2/2	Ver.No.	R2		