











REV.	SPECIFICATION	ECN NO.	APPD.

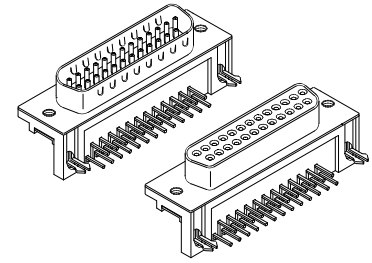

Material:
Housing: PBT,UL94V-0,Black.
Contacts: Brass, Gold Plated on Contact Area and Gold Flash on Solder Tail over Nickel 50u".
Shell: Steel, 100u" Nickel Plated over 50u" Copper.
Electrical Characteristics:
Voltage Rating: AC 250V.
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+85°C.
***RoHS Compliant**

Male

Female

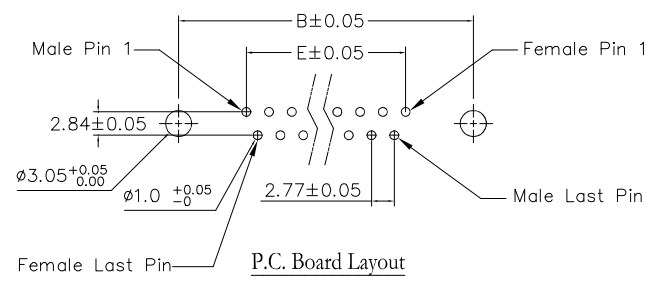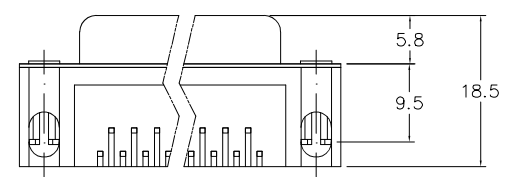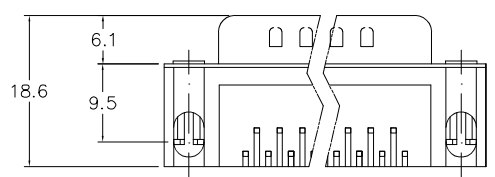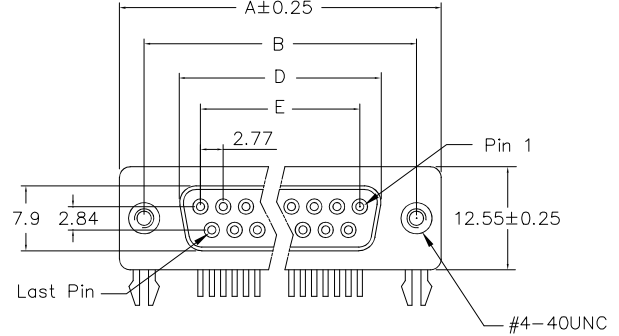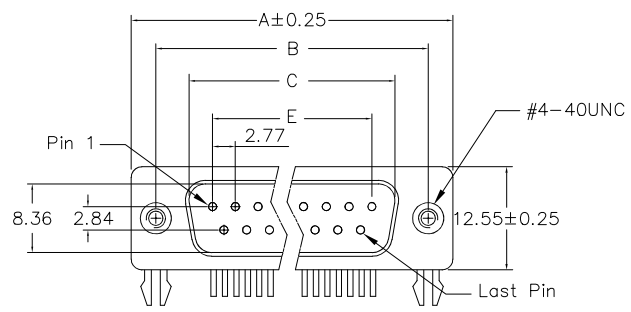

7906-A **xx** **M** **H** **A**
Series Position M: Male H:With Grounding Forks A: Tray Package
F: Female With Riveted Threaded Inserts and with Jack Screws are Bagged Separately

Positions	A	B	C	D	E
09	30.81	24.99	16.92	16.33	11.08
15	39.20	33.30	25.25	24.70	19.39
25	53.05	47.04	38.96	38.40	33.24
37	69.40	63.50	55.42	54.80	49.86

Tolerances	Dwg. No.	7906D03029		Title:	
.x = ±0.38	Projection			7906-A Series D-SUB Right Angle Type	
.xx = ±0.25	Unit	mm	Scale		1:1
.xxx = ±0.13	Drawn By	Martin 07/11'22			

① 747

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 7906-AxxMHA&7906-AxxFHA

SHEET	1/1	Ver.No.	A4
-------	-----	---------	----