

REV.	SPECIFICATION	ECN NO.	APPD.

Male

Female








Material:

Housing: PBT,UL94V-0,Black.
Contacts: Brass, Gold Plated on Contact Area and Gold Flash on Solder Tail over Nickel 80u".
Shell: Steel, 100u" Nickel over 50u" copper.
Boardlock: Brass, Tin Plated.
Screwlock: Steel, Nickel Plated.

Electrical Characteristics:

Voltage Rating: AC 250V.
Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

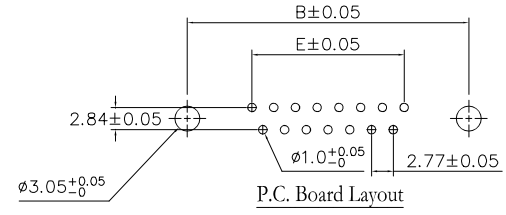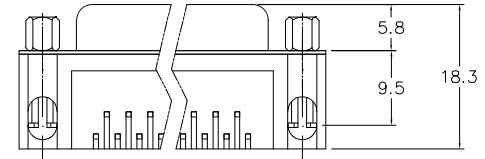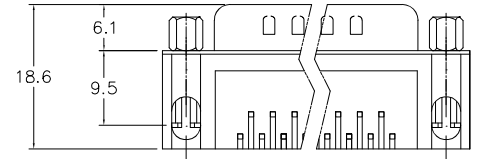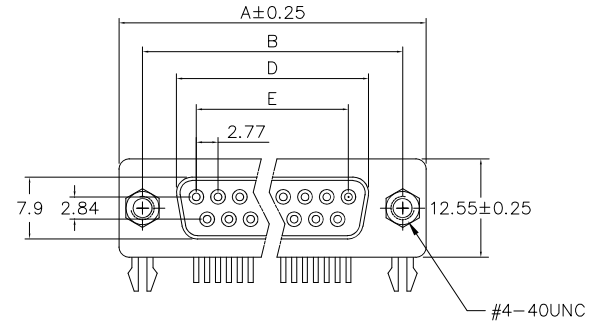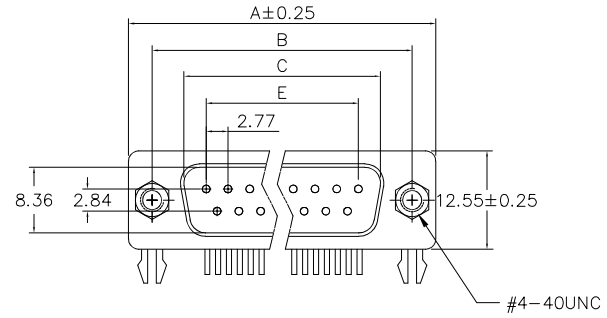

7906-A xx
 Series No. of Positions

M
 M: Male
 F: Female

Y
 Y: With Grounding Forks
 With Riveted Threaded Inserts and with Jack Screws Attached

A
 A: Tray Package

Positions	A	B	C	D	E
09	30.81	24.99	16.92	16.33	11.08
15	39.20	33.30	25.25	24.70	19.39
25	53.05	47.04	38.96	38.40	33.24
37	69.40	63.50	55.42	54.80	49.86

Tolerances	Dwg No.	7906D03030		Title:	
x. = ±0.38	Projection			7906-A Series D-SUB Right Angle Type	
.x = ±0.25	Unit	mm	Scale		1:N
.xx = ±0.13	Drawn By	Martin 06/23'22			

① 747

OUPIIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 7906-AxxMYA&7906-AxxFYA

SHEET	1/1	Ver.No.	A2
-------	-----	---------	----